



PRODUCT SPECIFICATION

Doc. Number:

- ☐ Tentative Specification
- ☐ Preliminary Specification
- ☒ Approval Specification

MODEL NO.: N156HCA
SUFFIX: E5B Rev.C1

Customer:**APPROVED BY****SIGNATURE****Name / Title**

Note

Please return 1 copy for your confirmation with your signature and comments.

Approved By	Checked By	Prepared By

**CONTENTS**

1. GENERAL DESCRIPTION	5
1.1 OVERVIEW	5
1.2 GENERAL SPECIFICATIONS.....	5
2. MECHANICAL SPECIFICATIONS	6
2.1 CONNECTOR TYPE	6
3. ABSOLUTE MAXIMUM RATINGS	7
3.1 ABSOLUTE RATINGS OF ENVIRONMENT.....	7
3.2 ELECTRICAL ABSOLUTE RATINGS	7
3.2.1 TFT LCD MODULE	7
4. ELECTRICAL SPECIFICATIONS.....	8
4.1 FUNCTION BLOCK DIAGRAM.....	8
4.2. INTERFACE CONNECTIONS	8
4.3 ELECTRICAL CHARACTERISTICS	10
4.3.1 LCD ELETRONICS SPECIFICATION.....	10
4.3.2 LED CONVERTER SPECIFICATION.....	12
4.3.3 BACKLIGHT UNIT.....	14
4.4 DISPLAY PORT INPUT SIGNAL TIMING SPECIFICATIONS.....	15
4.4.1 ELECTRICAL SPECIFICATIONS.....	15
4.4.2 COLOR DATA INPUT ASSIGNMENT	16
4.5 DISPLAY TIMING SPECIFICATIONS	17
4.6 POWER ON/OFF SEQUENCE	18
5. OPTICAL CHARACTERISTICS	21
5.1 TEST CONDITIONS.....	21
5.2 OPTICAL SPECIFICATIONS.....	21
6. RELIABILITY TEST ITEM	24
7. PACKING	25
7.1 MODULE LABEL	25
7.2 CARTON	26
7.3 PALLET	27
7.4 UN-PACK METHOD.....	28
8. PRECAUTIONS	29
8.1 HANDLING PRECAUTIONS	29
8.2 STORAGE PRECAUTIONS	29
8.3 OPERATION PRECAUTIONS	29
Appendix. EDID DATA STRUCTURE.....	30
Appendix. OUTLINE DRAWING.....	33



Appendix. SYSTEM COVER DESIGN GUIDANCE	35
Appendix. LCD MODULE HANDLING MANUAL	44

www.panelook.com

**REVISION HISTORY**

Version	Date	Page	Description
3.0	Jul.06, 2022	All	Spec Ver.3.0 was first issued.

1. GENERAL DESCRIPTION

1.1 OVERVIEW

N156HCA-EAB is a 15.6" (15.547" diagonal) TFT Liquid Crystal Display NB module with LED Backlight unit and 30 pins eDP interface. This module supports 1920 x 1080 FHD AAS mode and can display 262,144 colors.

1.2 GENERAL SPECIFICATIONS

Item	Specification	Unit	Note
Screen Size	15.547 diagonal		
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1920 x R.G.B. x 1080	pixel	-
Pixel Pitch	0.17925 (H) x 0.17925 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	262,144	color	-
Interface	eDP1.2		
Transmissive Mode	Normally Black	-	-
Surface Treatment	Hard coating (3H), Anti-Glare	-	-
Luminance, White	250	Cd/m2	
Color Gamma	45%	NTSC	
Power Consumption	Total 3.7 W (Max.) @ cell 0.8 W (Max.), BL 2.9W (Max.)		(1)
Special Function Support	Free-sync (60 Hz ~ 40Hz)		

Note (1) The specified power consumption (with converter efficiency) is under the conditions at VCCS = 3.3 V, fv = 60 Hz, LED_VCCS = Typ, fPWM = 200 Hz, Duty=100% and Ta = 25 ± 2 °C, whereas mosaic pattern is displayed.

2. MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	350.36	350.66	350.96	mm	(1)(2)(3)
	Vertical (V)	204.94	205.24	205.54	mm	
	Thickness (T) w/o PCB	-	3.05	3.20	mm	
	Thickness (T) with PCB	-	-	5.00	Mm	
Active Area	Horizontal	344.06	344.16	344.26	mm	
	Vertical	193.49	193.59	193.69	mm	
Weight		-	355	370	g	

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

(2) Dimensions are measured by caliper.

(3) Panel thickness is measured with calipers clamping mylar or tape tightly



2.1 CONNECTOR TYPE

Please refer appendix outline drawing for detail design.

Connector Part No.: IPEX-20455-030E-12

User's connector Part No: IPEX-20453-030T-03

3. ABSOLUTE MAXIMUM RATINGS

3.1 ABSOLUTE RATINGS OF ENVIRONMENT


Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T _{ST}	-20	+60	°C	(1)
Operating Ambient Temperature	T _{OP}	0	+50	°C	(1), (2)

Note (1) (a) 90 %RH Max. (Ta < 40 °C).

(b) Wet-bulb temperature should be 39 °C Max.

(c) No condensation.

Note (2) The temperature of panel surface should be 0 °C min. and 60 °C max.

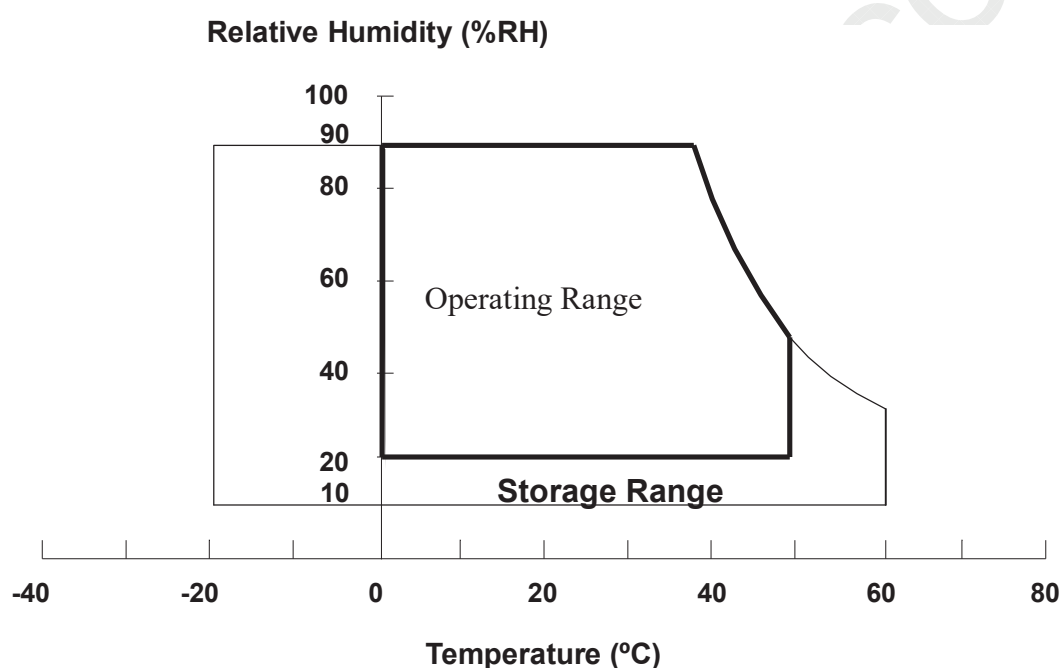

3.2 ELECTRICAL ABSOLUTE RATINGS

3.2.1 TFT LCD MODULE


Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCCS	-0.3	+4.0	V	(1)
Logic Input Voltage	V _{IN}	-0.3	VCCS+0.3	V	
Converter Input Voltage	LED_VCCS	-0.3	26	V	(1)
Converter Control Signal Voltage	LED_PWM,	-0.3	5	V	(1)
Converter Control Signal Voltage	LED_EN	-0.3	5	V	(1)

Note (1) Stresses beyond those listed in above “ELECTRICAL ABSOLUTE RATINGS” may cause permanent damage to the device. Normal operation should be restricted to the conditions described in “ELECTRICAL CHARACTERISTICS”.



4. ELECTRICAL SPECIFICATIONS

4.1 FUNCTION BLOCK DIAGRAM

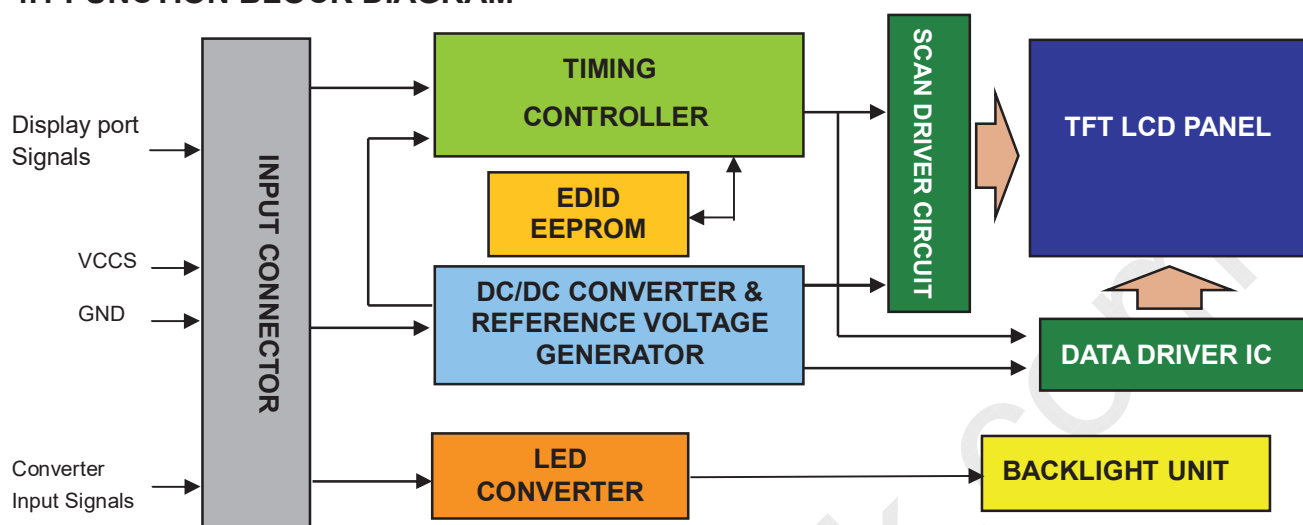


4.2. INTERFACE CONNECTIONS

PIN ASSIGNMENT

Pin	Symbol	Description	Remark
1	NC	No Connection (Reserved for LCD test)	
2	H_GND	High Speed Ground	
3	ML1-	Complement Signal-Lane 1	
4	ML1+	True Signal-Main Lane 1	
5	H_GND	High Speed Ground	
6	ML0-	Complement Signal-Lane 0	
7	ML0+	True Signal-Main Lane 0	
8	H_GND	High Speed Ground	
9	AUX+	True Signal-Auxiliary Channel	
10	AUX-	Complement Signal-Auxiliary Channel	
11	H_GND	High Speed Ground	
12	VCCS	Power Supply +3.3 V (typical)	
13	VCCS	Power Supply +3.3 V (typical)	
14	NC	No Connection (Reserved for LCD test)	
15	GND	Ground	
16	GND	Ground	
17	HPD	Hot Plug Detect	
18	BL_GND	BL Ground	
19	BL_GND	BL Ground	
20	BL_GND	BL Ground	
21	BL_GND	BL Ground	
22	LED_EN	BL_Enable Signal of LED Converter	
23	LED_PWM	PWM Dimming Control Signal of LED Converter	
24	NC	No Connection (Reserved for LCD test)	

25	NC	No Connection (Reserved for LCD test)	
26	LED_VCCS	BL Power	
27	LED_VCCS	BL Power	
28	LED_VCCS	BL Power	
29	LED_VCCS	BL Power	
30	NC	No Connection (Reserved for LCD test)	

Note (1) The first pixel is odd as shown in the following figure.

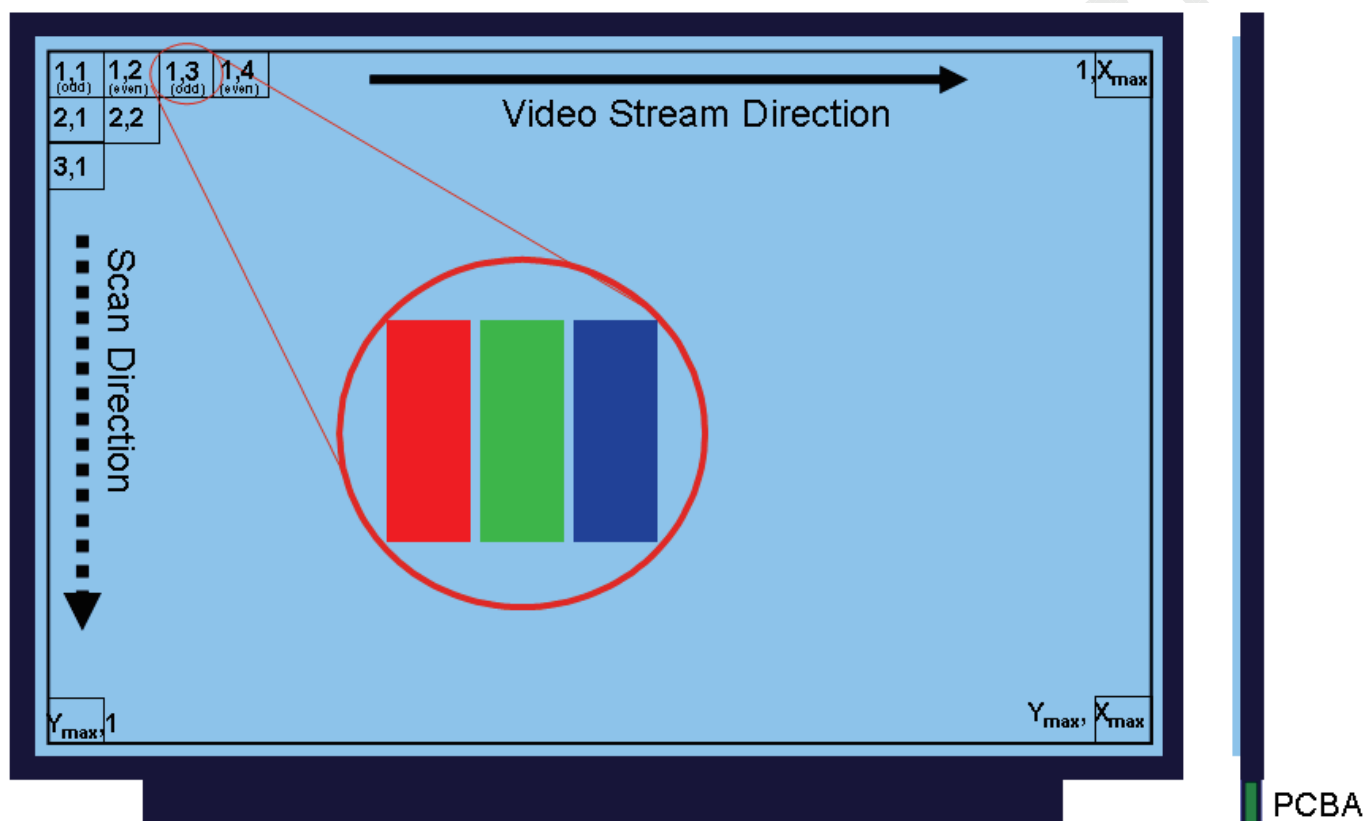

4.3 ELECTRICAL CHARACTERISTICS

4.3.1 LCD ELETRONICS SPECIFICATION


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		VCCS	3.0	3.3	3.6	V	(1)
Ripple Voltage		V _{RP}	-	50	-	mV	(1)
Inrush Current		I _{RUSH}	-	-	1.5	A	(1),(2)
Power Supply Current	Mosaic	I _{CC}	-	220	243	mA	(3)a
	Black		-	220	243	mA	(3)
HPD	High Level		2.25	-	2.75	V	(4)
	Low Level		0	-	0.4	V	(5)
HPD Impedance		R _{HPD}	30K			ohm	(5)

Note (1) The ambient temperature is $T_a = 25 \pm 2^\circ\text{C}$.


Note (2) I_{RUSH}: the maximum current when VCCS is rising

I_{IS}: the maximum current of the first 100ms after power-on

Measurement Conditions: Shown as the following figure. Test pattern: black.

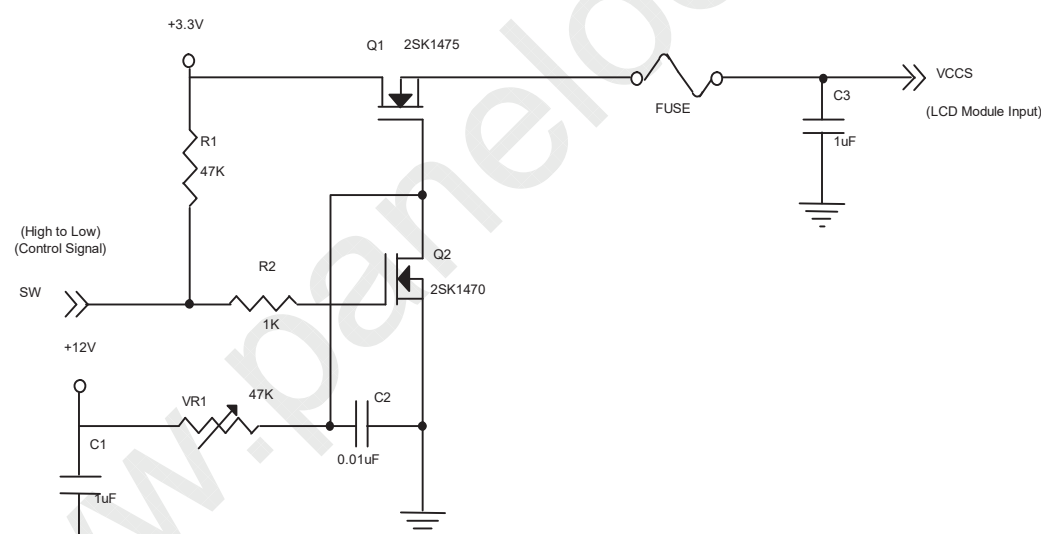


VCCS rising time is 0.5ms

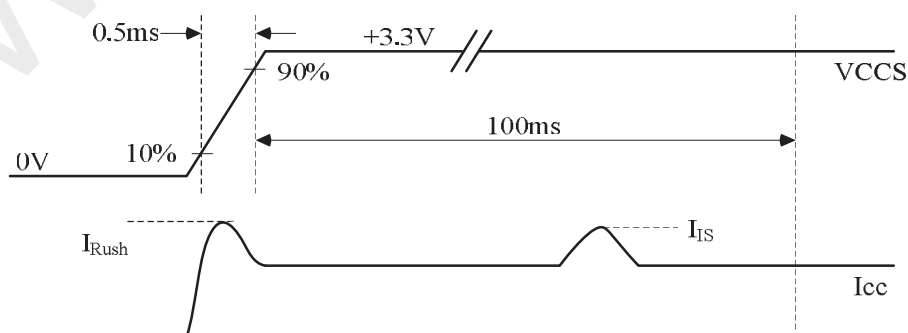

Note (3) The specified power supply current is under the conditions at $V_{CCS} = 3.3\text{ V}$, $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$, DC Current and $f_v = 60\text{ Hz}$, whereas a power dissipation check pattern below is displayed.

a. Mosaic Pattern

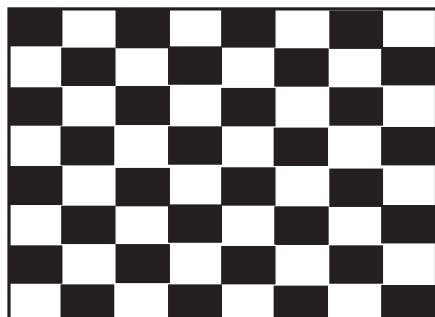

Active Area

Note (4) The specified signals have equivalent impedances pull down to ground in the LCD module respectively. Customers should keep the input signal level requirement with the load of LCD module. Please refer to Note (4) of 4.3.2 LED CONVERTER SPECIFICATION to obtain more information.

Note (5) When a source detects a low-going HPD pulse, it must be regarded as a HPD event. Thus, the source must read the link / sink status field or receiver capability field of the DPCD and take corrective action.


4.3.2 LED CONVERTER SPECIFICATION

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Converter Input Power Supply Voltage		LED_Vccs	5	12	21	V	
Converter Inrush Current		I _{LED_RUSH}	-	-	1.5	A	(1)
LED_EN Control Level	Backlight On		2.2	-	5.0	V	(4)
	Backlight Off		0	-	0.6	V	(4)
LED_EN Impedance		R _{LED_EN}	30K	-	-	ohm	(4)
PWM Control Level	PWM High Level		2.2	-	5.0	V	(4)
	PWM Low Level		0	-	0.6	V	(4)
PWM Impedance		R _{PWM}	30K	-	-	ohm	(4)
PWM Control Duty Ratio			5	-	100	%	(5)
PWM Control Permissive Ripple Voltage		V _{PWM_pp}	-	-	100	mV	
PWM Control Frequency		f _{PWM}	190	-	2K	Hz	(2)
LED Power Current	LED_VCCS =Typ.	I _{LED}	-	231	242	mA	(3)


Note (1) I_{LED_RUSH}: the maximum current when LED_VCCS is rising,

I_{LED_IS}: the maximum current of the first 100ms after power-on,

Measurement Conditions: Shown as the following figure. LED_VCCS = Typ, Ta = 25 ± 2 °C, f_{PWM} = 200 Hz, Duty=100%.

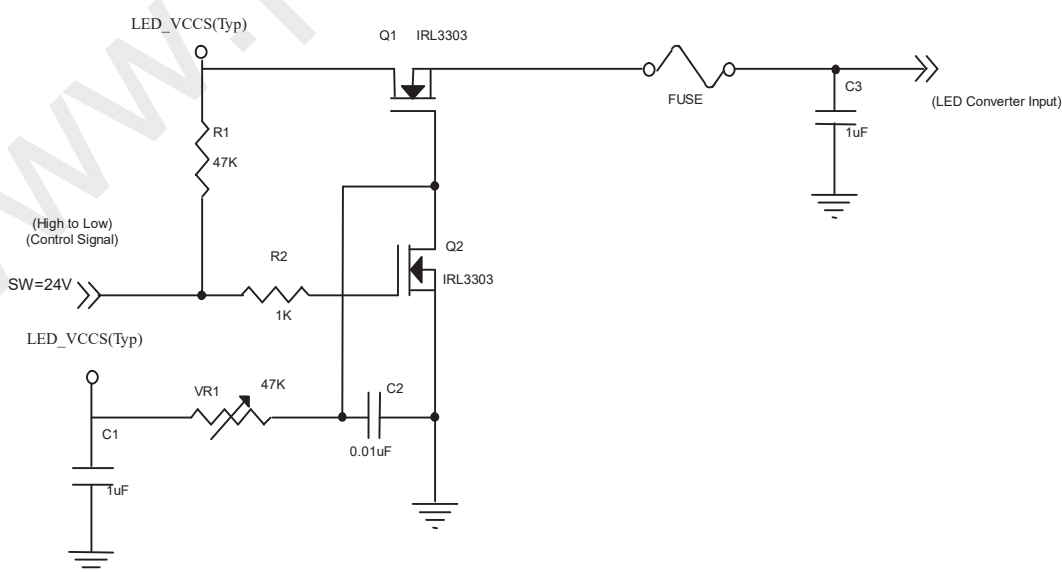

VLED rising time is 0.5ms

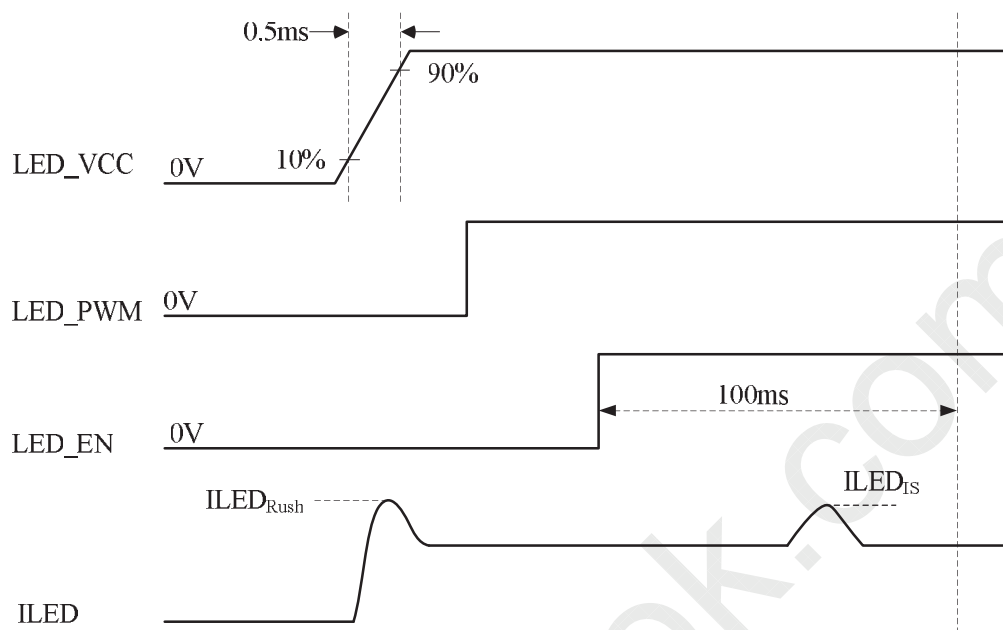

Note (2) If PWM control frequency is applied in the range less than 1KHz, the “waterfall” phenomenon on the screen may be found. To avoid the issue, it's a suggestion that PWM control frequency should follow the criterion as below.

PWM control frequency f_{PWM} should be in the range


$$(N + 0.33) * f \leq f_{PWM} \leq (N + 0.66) * f$$

N : Integer ($N \geq 3$)

f : Frame rate

Note (3) The specified LED power supply current is under the conditions at “LED_VCCS = Typ.”, $T_a = 25 \pm 2^\circ\text{C}$, $f_{PWM} = 200\text{ Hz}$, Duty=100%.

Note (4) The specified signals have equivalent impedances pull down to ground in the LCD module respectively. Customers should keep the input signal level requirement with the load of LCD module. For example, the figure below describes the equivalent pull down impedance of LED_EN (If it exists). The rest pull down impedances of other signals (eg. HPD, PWM ...) are in the same concept.

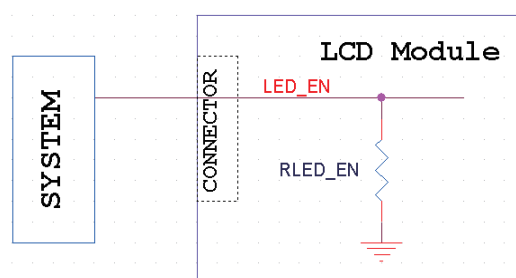


Note (5) If the cycle-to-cycle difference of PWM duty exceeds 0.1%, especially when the PWM duty is low, slight brightness change might be observed.

4.3.3 BACKLIGHT UNIT

 $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
LED Light Bar Power Supply Voltage	V_L	29.7	31.9	33	V	(1)(2)(Duty100%)
LED Light Bar Power Supply Current	I_L	-	76.8	-	mA	
Power Consumption	P_L	-	2.45	2.53	W	(3)
LED Life Time	L_{BL}	15000	-	-	Hrs	(4)

Note (1) LED current is measured by utilizing a high frequency current meter as shown below :

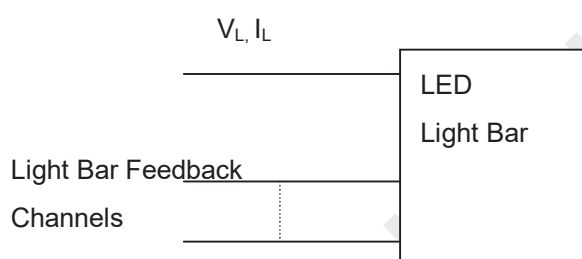

Note (2) For better LED light bar driving quality, it is recommended to utilize the adaptive boost converter with current balancing function to drive LED light-bar.

Note (3) $P_L = I_L \times V_L$ (Without LED converter transfer efficiency)


Note (4) The lifetime of LED is defined as the time when it continues to operate under the conditions at $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$ and $I_L = 19.2\text{ mA}$ (Per EA) until the brightness becomes $\leq 50\%$ of its original value.

4.4 DISPLAY PORT INPUT SIGNAL TIMING SPECIFICATIONS


4.4.1 ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Differential Signal Common Mode Voltage(MainLink and AUX)	VCM	0		2	V	(1)(4)
AUX AC Coupling Capacitor	C_Aux_Source	75		200	nF	(2)
Main Link AC Coupling Capacitor	C_ML_Source	75		200	nF	(3)


Note (1) Display port interface related AC coupled signals should follow VESA DisplayPort Standard Version1. Revision 1a and VESA Embedded DisplayPort™ Standard Version 1.2. There are many optional items described in eDP1.2. If some optional item is requested, please contact us.

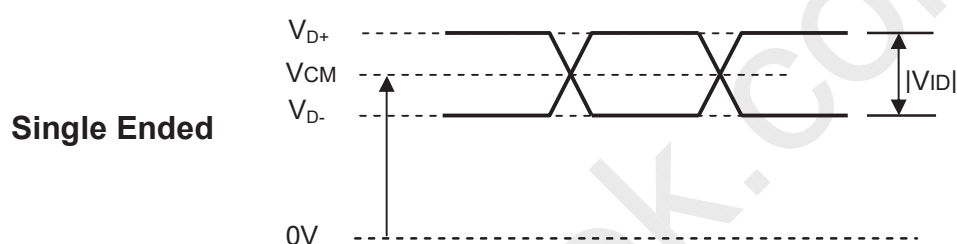

(2) Recommended eDP AUX Channel topology is as below and the AUX AC Coupling Capacitor (C_Aux_Source) should be placed on the source device.

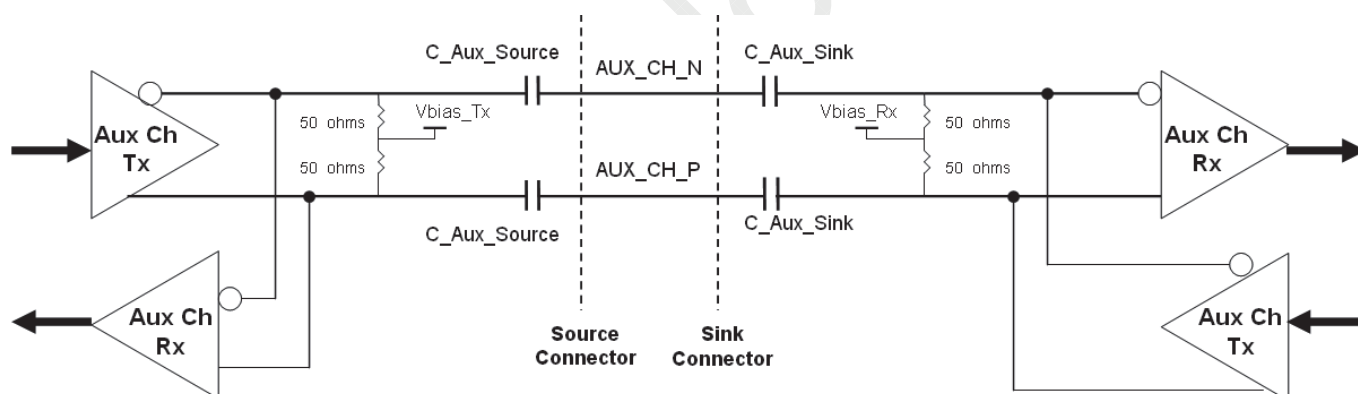

(3) Recommended Main Link Channel topology is as below and the Main Link AC Coupling Capacitor (C_ML_Source) should be placed on the source device.

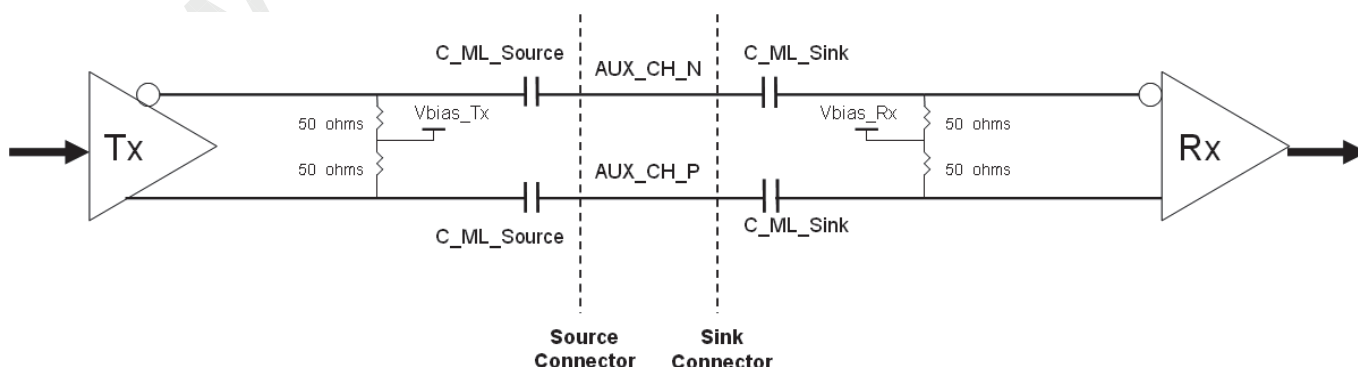

(4) The source device should pass the test criteria described in DisplayPortCompliance Test Specification (CTS) 1.1



4.4.2 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color. The higher the binary input the brighter the color. The table below provides the assignment of color versus data input.

Color		Data Signal																	
		Red						Green						Blue					
		R5	R4	R3	R2	R1	R0	G5	G4	G3	G2	G1	G0	B5	B4	B3	B2	B1	B0
Basic Colors	Black	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0
	Green	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0
	Blue	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1
	Cyan	0	0	0	0	0	0	1	1	1	1	1	1	1	1	1	1	1	1
	Magenta	1	1	1	1	1	1	0	0	0	0	0	0	1	1	1	1	1	1
	Yellow	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	0	0
	White	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Gray Scale Of Red	Red(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Red(1)	0	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(2)	0	0	0	0	1	0	0	0	0	0	0	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Red(61)	1	1	1	1	0	1	0	0	0	0	0	0	0	0	0	0	0	0
	Red(62)	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	0
Red(63)	1	1	1	1	1	1	0	0	0	0	0	0	0	0	0	0	0	0	
Gray Scale Of Green	Green(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Green(1)	0	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0
	Green(2)	0	0	0	0	0	0	0	0	0	0	1	0	0	0	0	0	0	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Green(61)	0	0	0	0	0	0	1	1	1	1	0	1	0	0	0	0	0	0
	Green(62)	0	0	0	0	0	0	1	1	1	1	1	0	0	0	0	0	0	0
Green(63)	0	0	0	0	0	0	1	1	1	1	1	1	0	0	0	0	0	0	
Gray Scale Of Blue	Blue(0)/Dark	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
	Blue(1)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1
	Blue(2)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	1	0
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:	:
	Blue(61)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	0	1
	Blue(62)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	0
	Blue(63)	0	0	0	0	0	0	0	0	0	0	0	0	1	1	1	1	1	1

Note (1) 0: Low Level Voltage, 1: High Level Voltage


4.5 DISPLAY TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.


Refresh Rate 60Hz

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK	Frequency	144.3	145	145.7	144.3	MHz	-
DE	Vertical Total Time	1120	1124	1128	1120	TH	-
	Vertical Active Display Period	1080	1080	1080	1080	TH	-
	Vertical Active Blanking Period	TV-TVD	44	TV-TVD	TV-TVD	TH	-
	Horizontal Total Time	2130	2150	2170	2130	Tc	-
	Horizontal Active Display Period	1920	1920	1920	1920	Tc	-
	Horizontal Active Blanking Period	TH-THD	230	TH-THD	TH-THD	Tc	-

INPUT SIGNAL TIMING DIAGRAM

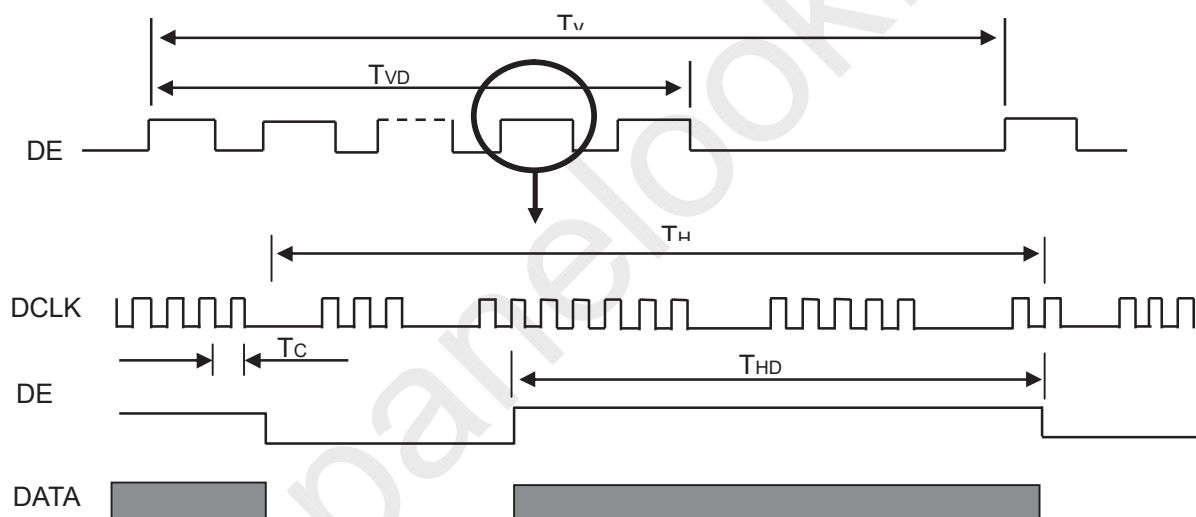

4.6 POWER ON/OFF SEQUENCE

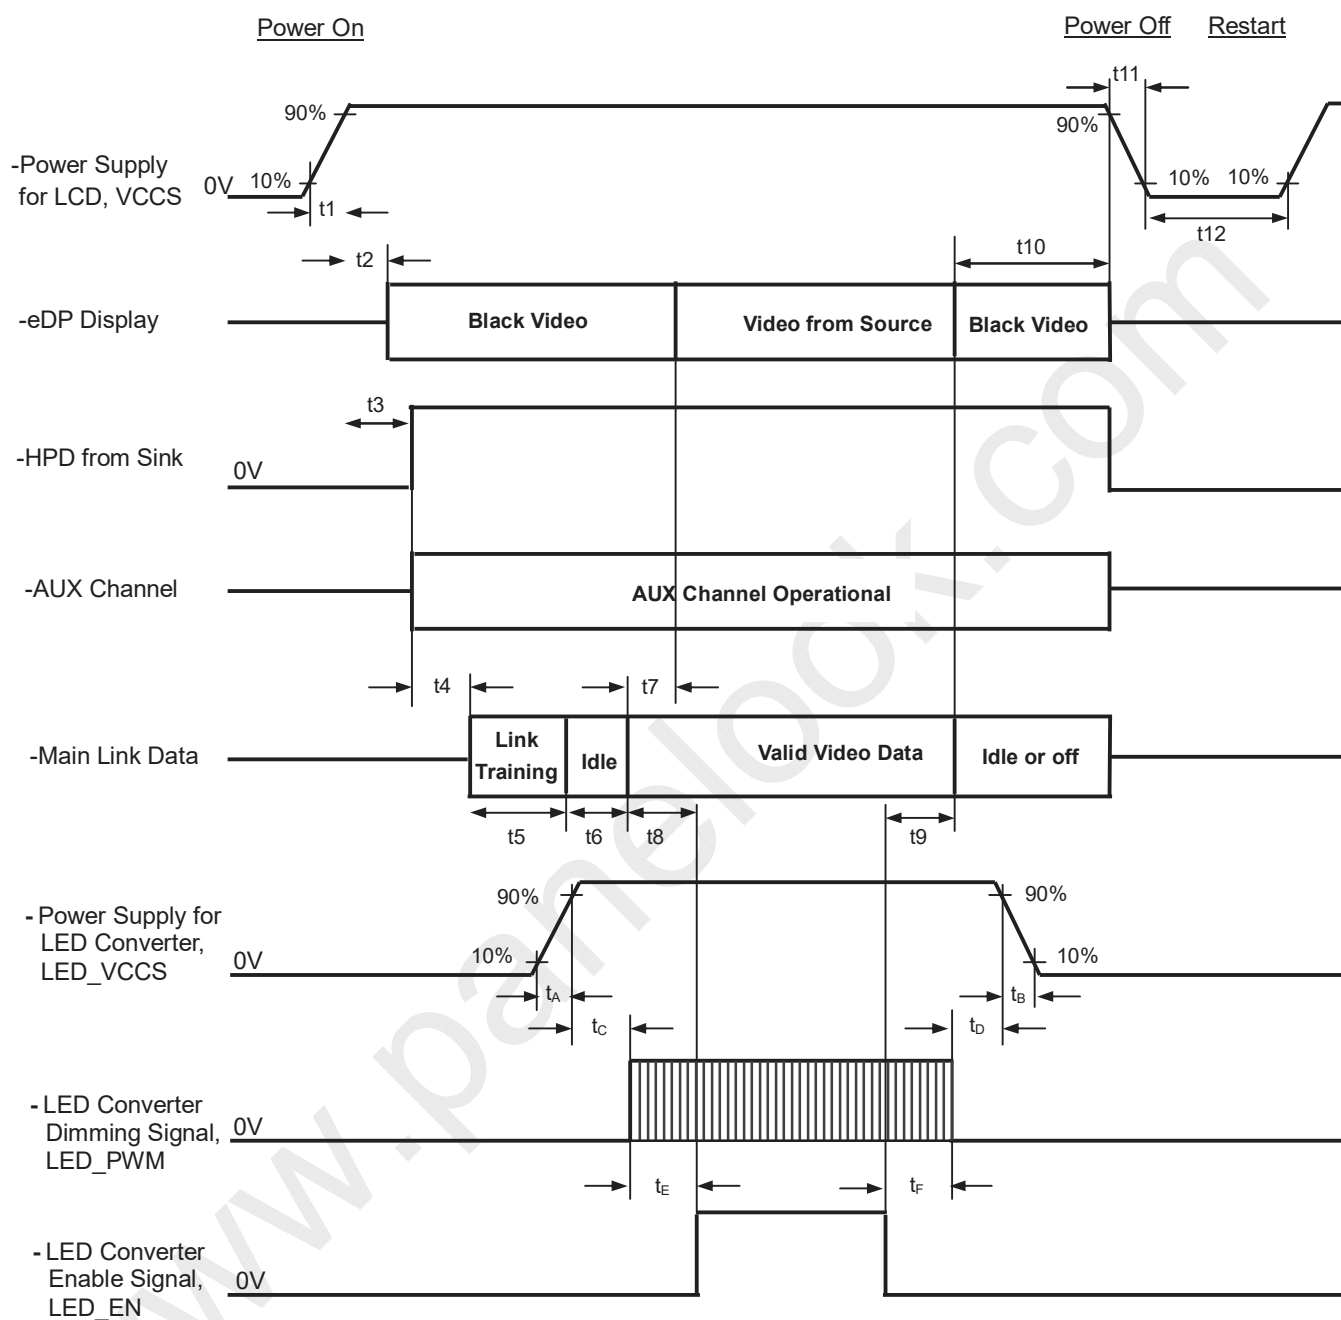



PRODUCT SPECIFICATION

Timing Specifications

Parameter	Description	Reqd. By	Value		Unit	Notes
			Min	Max		
t1	Power rail rise time, 10% to 90%	Source	0.5	10	ms	-
t2	Delay from LCD,VCCS to black video generation	Sink	0	200	ms	Automatic Black Video generation prevents display noise until valid video data is received from the Source (see Notes:2 and 3 below)
t3	Delay from LCD,VCCS to HPD high	Sink	0	200	ms	Sink AUX Channel must be operational upon HPD high (see Note:4 below)
t4	Delay from HPD high to link training initialization	Source	0	-	ms	Allows for Source to read Link capability and initialize
t5	Link training duration	Source	0	-	ms	Dependant on Source link training protocol
t6	Link idle	Source	0	-	ms	Min Accounts for required BS-Idle pattern. Max allows for Source frame synchronization
t7	Delay from valid video data from Source to video on display	Sink	0	50	ms	Max value allows for Sink to validate video data and timing. At the end of T7, Sink will indicate the detection of valid video data by setting the SINK_STATUS bit to logic 1 (DPCD 00205h, bit 0), and Sink will no longer generate automatic Black Video
t8	Delay from valid video data from Source to backlight on	Source	80	-	ms	Source must assure display video is stable *: Recommended by INX. To avoid garbage image.
t9	Delay from backlight off to end of valid video data	Source	50	-	ms	Source must assure backlight is no longer illuminated. At the end of T9, Sink will indicate the detection of no valid video data by setting the SINK_STATUS bit to logic 0 (DPCD 00205h, bit 0), and Sink will automatically display Black Video. (See Notes: 2 and 3 below) *: Recommended by INX. To avoid garbage image.
t10	Delay from end of valid video data from Source to power off	Source	0	500	ms	Black video will be displayed after receiving idle or off signals from Source
t11	VCCS power rail fall time, 90% to 10%	Source	0.5	10	ms	-



t ₁₂	VCCS Power off time	Source	500	-	ms	-
t _A	LED power rail rise time, 10% to 90%	Source	0.5	10	ms	-
t _B	LED power rail fall time, 90% to 10%	Source	0	10	ms	-
t _C	Delay from LED power rising to LED dimming signal	Source	1	-	ms	-
t _D	Delay from LED dimming signal to LED power falling	Source	1	-	ms	-
t _E	Delay from LED dimming signal to LED enable signal	Source	0	-	ms	-
t _F	Delay from LED enable signal to LED dimming signal	Source	0	-	ms	-

Note (1) Please don't plug or unplug the interface cable when system is turned on.

Note (2) The Sink must include the ability to automatically generate Black Video autonomously. The Sink must automatically enable Black Video under the following conditions:

- Upon LCDVCC power-on (within T2 max)
- When the "NoVideoStream_Flag" (VB-ID Bit 3) is received from the Source (at the end of T9)

Note (3) The Sink may implement the ability to disable the automatic Black Video function, as described in Note (2), above, for system development and debugging purposes.

Note (4) The Sink must support AUX Channel polling by the Source immediately following LCDVCC power-on without causing damage to the Sink device (the Source can re-try if the Sink is not ready). The Sink must be able to response to an AUX Channel transaction with the time specified within T3 max.

5. OPTICAL CHARACTERISTICS

5.1 TEST CONDITIONS


Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V _{CC}	3.3	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
LED Light Bar Input Current	I _L	76.8	mA

The measurement methods of optical characteristics are shown in Section 5.2. The following items should be measured under the test conditions described in Section 5.1 and stable environment shown in Note (5).

5.2 OPTICAL SPECIFICATIONS

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	$\theta_x=0^\circ, \theta_Y=0^\circ$ Viewing Normal Angle	800	1000	-	-	(2), (5) ,(7)
Response Time		T _R		-	11	14	ms	(3) ,(7)
		T _F		-	9	11	ms	
Average Luminance of White		L _{Ave}		212	250	-	cd/m ²	(4), (6) ,(7)
Color Chromaticity	Red	R _x		Typ – 0.03	0.590	Typ + 0.03	-	(1) ,(7)
		R _y			0.350		-	
	Green	G _x			0.330		-	
		G _y			0.555		-	
	Blue	B _x			0.153		-	
		B _y			0.119		-	
	White	W _x			0.313		-	
		W _y			0.329		-	
Viewing Angle	Horizontal	θ _x +	CR≥10	80	89		Deg.	(1),(5) , (7)
		θ _x -		80	89	-		
	Vertical	θ _y +		80	89	-		
		θ _y -		80	89	-		
White Variation		δW _{5p}	$\theta_x=0^\circ, \theta_Y=0^\circ$		1.11	1.25	-	(5),(6) , (7)

Note (1) Definition of Viewing Angle (θ_x , θ_y):

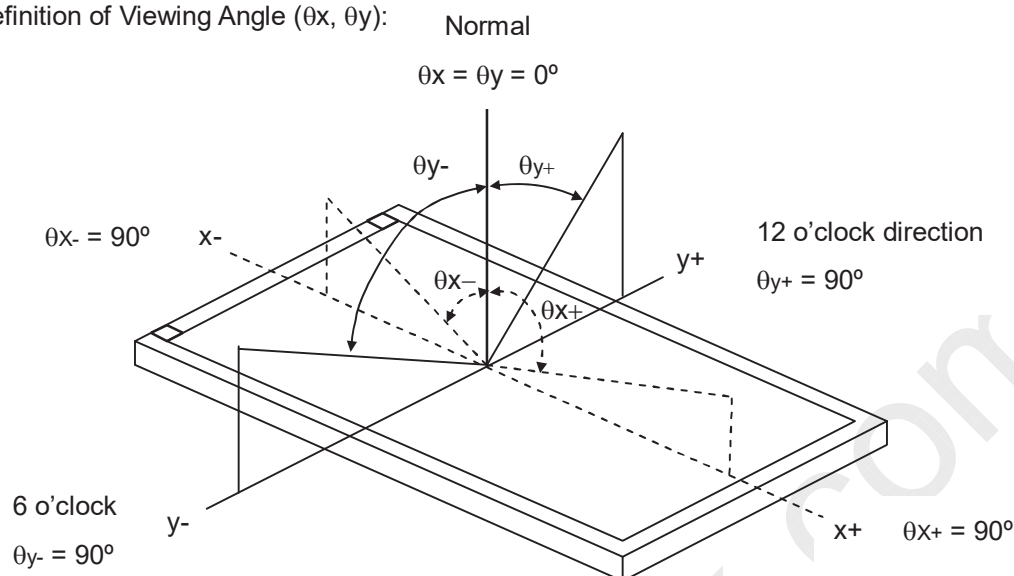

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$


L63: Luminance of gray level 63

L 0: Luminance of gray level 0

$$\text{CR} = \text{CR} (1)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R , T_F):

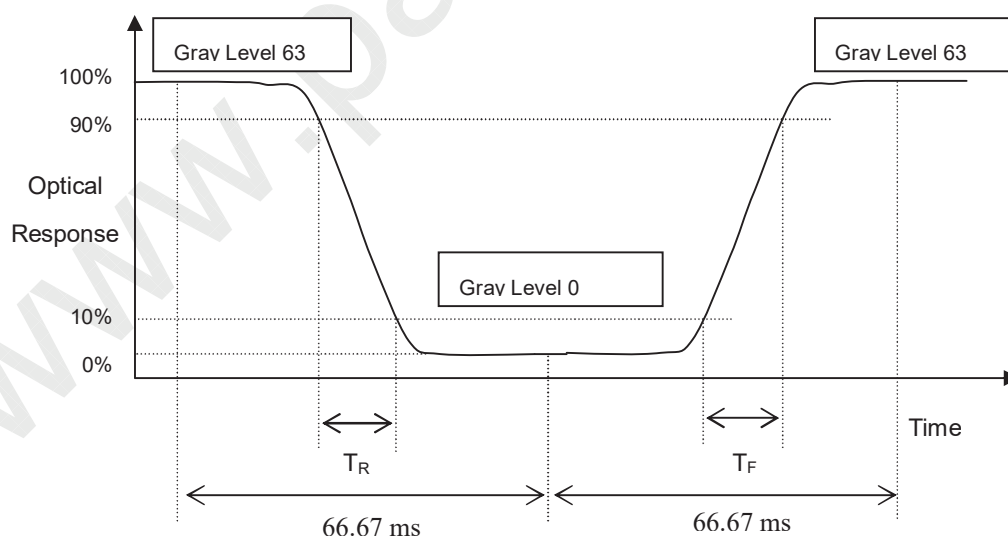

Note (4) Definition of Average Luminance of White (L_{AVE}):


Measure the luminance of gray level 63 at 5 points

$$L_{AVE} = [L (1) + L (2) + L (3) + L (4) + L (5)] / 5$$

L (x) is corresponding to the luminance of the point X at Figure in Note (6)

Note (5) Measurement Setup:

The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

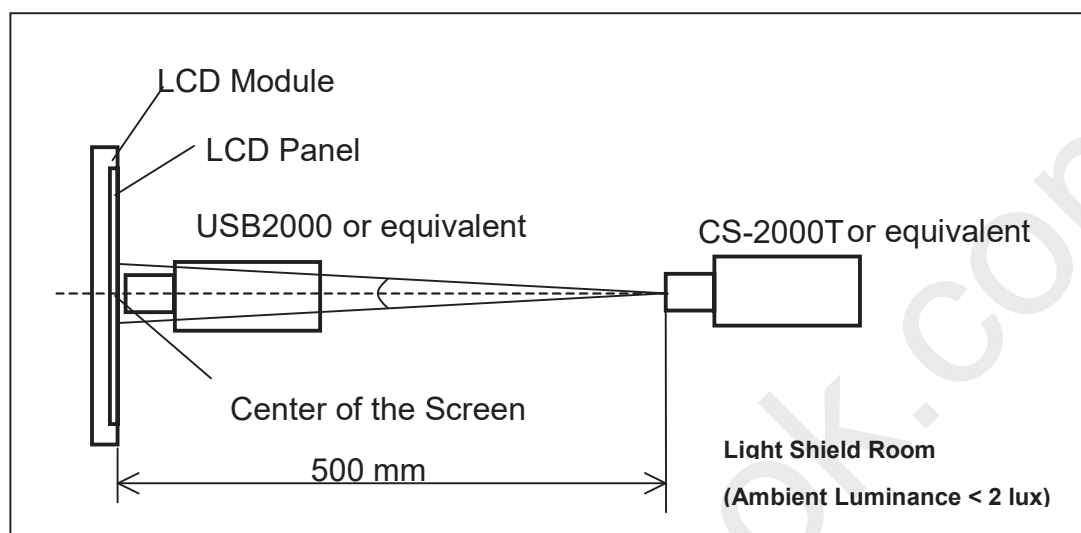


Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 63 at 5 points

$$\delta W_{5p} = \{ \text{Minimum} [L(1) \sim L(5)] / \text{Maximum} [L(1) \sim L(5)] \} * 100\%$$

$$\delta W_{13p} = \{ \text{Minimum} [L(1) \sim L(13)] / \text{Maximum} [L(1) \sim L(13)] \} * 100\%$$

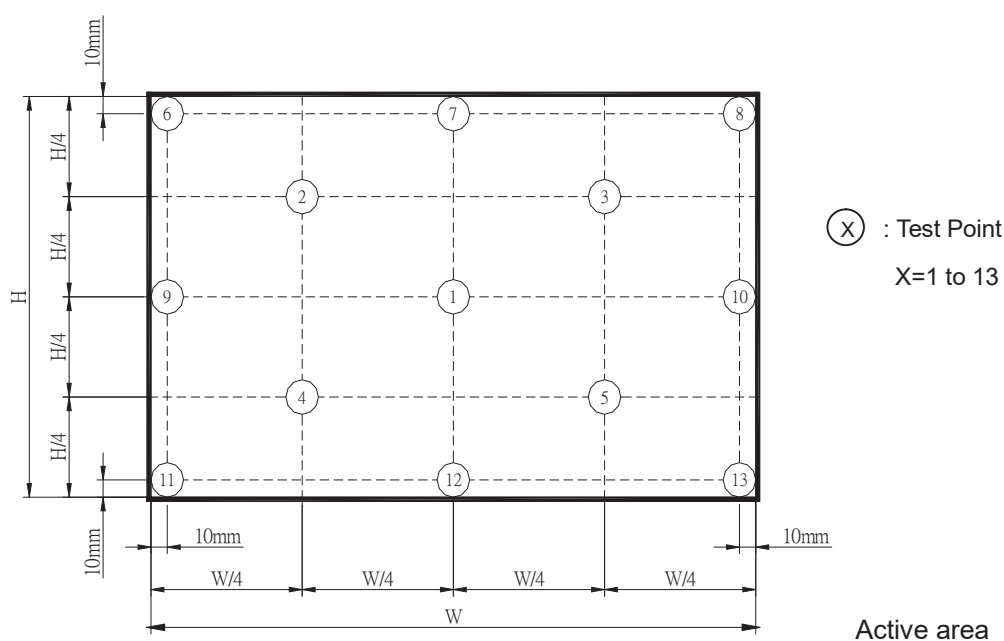

Note (7) The listed optical specifications refer to the initial value of manufacture, but the condition of the specifications after long-term operation will not be warranted.



6. RELIABILITY TEST ITEM

Test Item	Test Condition	Note
High Temperature Storage Test	60°C, 240 hours	(1) (2)
Low Temperature Storage Test	-20°C, 240 hours	
Thermal Shock Storage Test	-20°C, 0.5hour←→60°C, 0.5hour; 100cycles, 1hour/cycle	
High Temperature Operation Test	50°C, 240 hours	
Low Temperature Operation Test	0°C, 240 hours	
High Temperature & High Humidity Operation Test	50°C, RH 80%, 240hours	(1) (3)
ESD Test (Operation)	150pF, 330Ω, 1sec/cycle Condition 1 : Contact Discharge, ±8KV Condition 2 : Air Discharge, ±15KV	
Shock (Non-Operating)	220G, 2ms, half sine wave, 1 time for each direction of ±X, ±Y, ±Z	
Vibration (Non-Operating)	1.5G / 10-500 Hz, Sine wave, 30 min/cycle, 1cycle for each X, Y, Z	

Note (1) criteria : Normal display image with no obvious non-uniformity and no line defect.

Note (2) Evaluation should be tested after storage at room temperature for more than two hour

Note (3) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

7. PACKING

7.1 MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.



- (a) Model Name: N156HCA-E5B
- (b) Revision: Rev. XX, for example: C1, C2 ...etc.
- (c) Serial ID: XXXXXXYMDLNNNN
 - Serial No.
 - Product Line
 - Year, Month, Date
 - CMI Internal Use
 - Revision
 - CMI Internal Use
- (d) Production Location: MADE IN XXXX.
- (e) UL Logo: XXXX or XXXXX is UL factory ID.
- (f) X: A means A Bom, B means B Bom etc..

Serial ID includes the information as below:

- (a) Manufactured Date: Year: 0~9, for 2010~2019
 Month: 1~9, A~C, for Jan. ~ Dec.
 Day: 1~9, A~Y, for 1st to 31st, exclude I, O and U
- (b) Revision Code: cover all the change
- (c) Serial No.: Manufacturing sequence of product
- (d) Product Line: 1 -> Line1, 2 -> Line 2, ...etc.

7.2 CARTON

(1)Box Dimensions : 490(L)*350(W)*320(H)

(2)20 Module/Carton

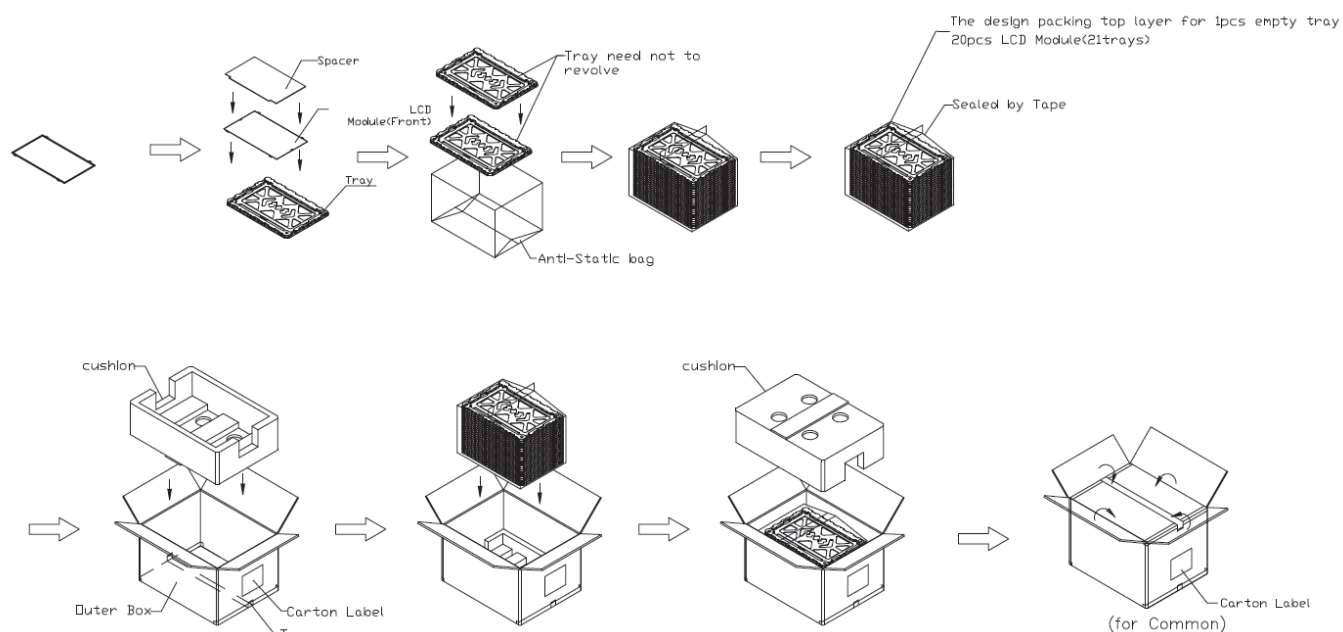


Figure. 7-2 Packing method

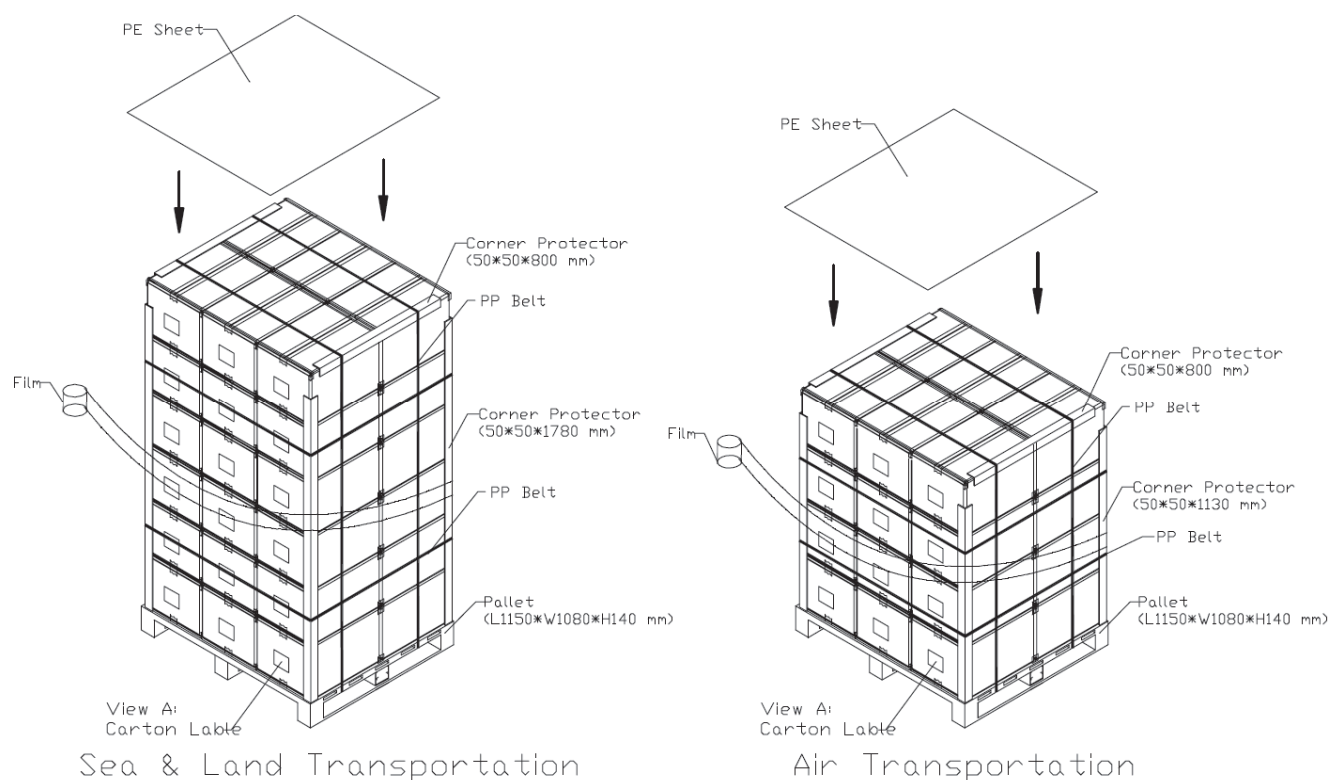
7.3 PALLET

Figure. 7-3 Packing method

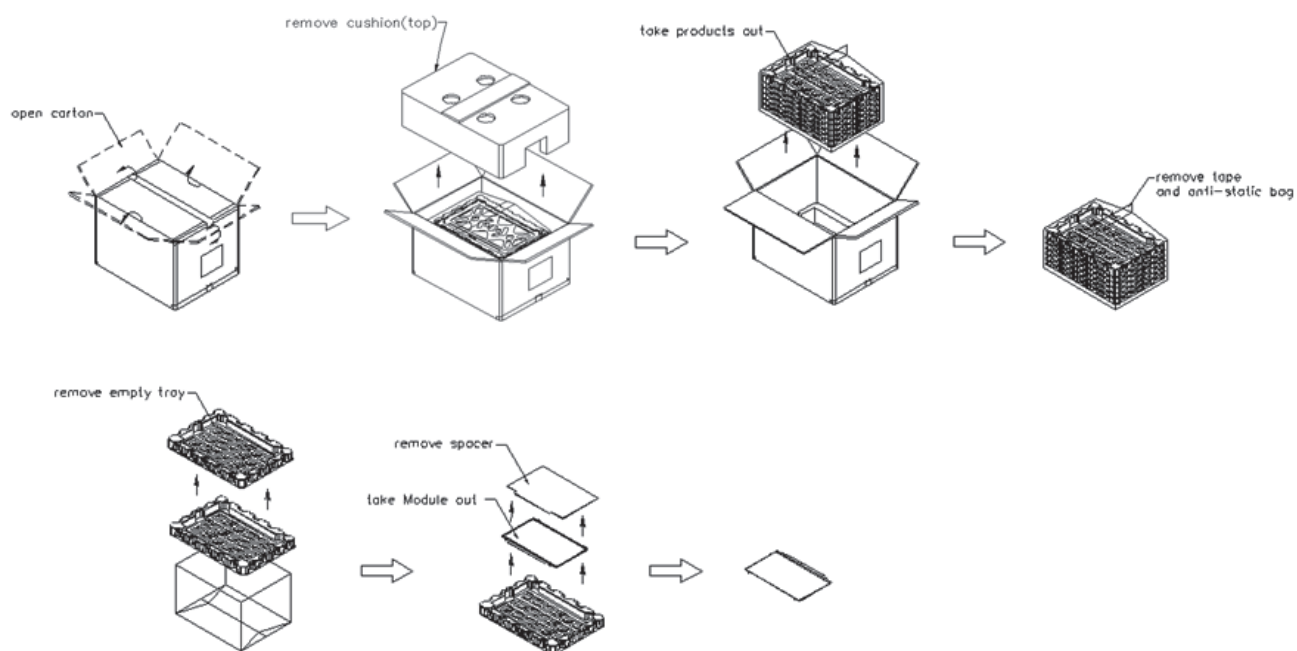
7.4 UN-PACK METHOD

Figure. 7-4 un-packing method



8. PRECAUTIONS

8.1 HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the LED wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.
- (12) Do not re-attach protective film onto the polarizer because of risk of bubble mura and dust.

8.2 STORAGE PRECAUTIONS

- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of LED will be higher than the room temperature.

8.3 OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMIS LSI chips from damage during latch-up.
- (3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while assembling with converter. Do not disassemble the module or insert anything into the Backlight unit.



Appendix. EDID DATA STRUCTURE

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the VESA Plug & Display and FPD1 standards.

Byte # (decimal)	Byte # (hex)	Field Name and Comments	Value (hex)	Value (binary)
0	00	Header	00	00000000
1	01	Header	FF	11111111
2	02	Header	FF	11111111
3	03	Header	FF	11111111
4	04	Header	FF	11111111
5	05	Header	FF	11111111
6	06	Header	FF	11111111
7	07	Header	00	00000000
8	08	EISA ID manufacturer name ("CMN")	0D	00001101
9	09	EISA ID manufacturer name	AE	10101110
10	0A	ID product code (LSB)	12	00010010
11	0B	ID product code (MSB)	15	00010101
12	0C	ID S/N (fixed "0")	00	00000000
13	0D	ID S/N (fixed "0")	00	00000000
14	0E	ID S/N (fixed "0")	00	00000000
15	0F	ID S/N (fixed "0")	00	00000000
16	10	Week of manufacture (fixed week code)	15	00010101
17	11	Year of manufacture (fixed year code)	1D	00011101
18	12	EDID structure version ("1")	01	00000001
19	13	EDID revision ("4")	04	00000100
20	14	Video I/P definition ("Digital")	95	10010101
21	15	Active area horizontal ("34.416cm")	22	00100010
22	16	Active area vertical ("19.359cm")	13	00010011
23	17	Display Gamma (Gamma = "2.2")	78	01111000
24	18	Feature support ("RGB, continous")	03	00000011
25	19	Rx1, Rx0, Ry1, Ry0, Gx1, Gx0, Gy1, Gy0	28	00101000
26	1A	Bx1, Bx0, By1, By0, Wx1, Wx0, Wy1, Wy0	65	01100101
27	1B	Rx=0.590	97	10010111
28	1C	Ry=0.350	59	01011001
29	1D	Gx=0.330	54	01010100
30	1E	Gy=0.555	8E	10001110
31	1F	Bx=0.153	27	00100111
32	20	By=0.119	1E	00011110
33	21	Wx=0.313	50	01010000
34	22	Wy=0.329	54	01010100
35	23	Established timings 1	00	00000000
36	24	Established timings 2	00	00000000
37	25	Manufacturer's reserved timings	00	00000000
38	26	Standard timing ID # 1	01	00000001
39	27	Standard timing ID # 1	01	00000001
40	28	Standard timing ID # 2	01	00000001
41	29	Standard timing ID # 2	01	00000001



42	2A	Standard timing ID # 3	01	00000001
43	2B	Standard timing ID # 3	01	00000001
44	2C	Standard timing ID # 4	01	00000001
45	2D	Standard timing ID # 4	01	00000001
46	2E	Standard timing ID # 5	01	00000001
47	2F	Standard timing ID # 5	01	00000001
48	30	Standard timing ID # 6	01	00000001
49	31	Standard timing ID # 6	01	00000001
50	32	Standard timing ID # 7	01	00000001
51	33	Standard timing ID # 7	01	00000001
52	34	Standard timing ID # 8	01	00000001
53	35	Standard timing ID # 8	01	00000001
54	36	Detailed timing description # 1 Pixel clock ("145"MHz, According to VESA CVT Rev1.4)	A4	10100100
55	37	# 1 Pixel clock (hex LSB first)	38	00111000
56	38	# 1 H active ("1920")	80	10000000
57	39	# 1 H blank ("230")	E6	11100110
58	3A	# 1 H active : H blank ("1920 : 230")	70	01110000
59	3B	# 1 V active ("1080")	38	00111000
60	3C	# 1 V blank ("44")	2C	00101100
61	3D	# 1 V active : V blank ("1080 : 44")	40	01000000
62	3E	# 1 H sync offset ("48")	30	00110000
63	3F	# 1 H sync pulse width ("32")	20	00100000
64	40	# 1 V sync offset : V sync pulse width ("6 : 8")	68	01101000
65	41	# 1 H sync offset : H sync pulse width : V sync offset : V sync width ("48 : 32 : 6 : 8")	00	00000000
66	42	# 1 H image size ("344 mm")	58	01011000
67	43	# 1 V image size ("193 mm")	C1	11000001
68	44	# 1 H image size : V image size	10	00010000
69	45	# 1 H boarder ("0")	00	00000000
70	46	# 1 V boarder ("0")	00	00000000
71	47	Non-interlaced, Normal Display, Digital separate, Positive Hsync, Negative Vsync	1A	00011010
72	48	Detailed timing description # 2 Pixel clock ("96.67"MHz, According to VESA CVT Rev1.4)	C3	11000011
73	49	# 2 Pixel clock (hex LSB first)	25	00100101
74	4A	# 2 H active ("1920")	80	10000000
75	4B	# 2 H blank ("230")	E6	11100110
76	4C	# 2 H active : H blank ("1920 : 230")	70	01110000
77	4D	# 2 V active ("1080")	38	00111000
78	4E	# 2 V blank ("44")	2C	00101100
79	4F	# 2 V active : V blank ("1080 : 44")	40	01000000
80	50	# 2 H sync offset ("48")	30	00110000
81	51	# 2 H sync pulse width ("32")	20	00100000
82	52	# 2 V sync offset : V sync pulse width ("6 : 8")	68	01101000
83	53	# 2 H sync offset : H sync pulse width : V sync offset : V sync width ("48 : 32 : 6 : 8")	00	00000000
84	54	# 2 H image size ("344 mm")	58	01011000
85	55	# 2 V image size ("193 mm")	C1	11000001






PRODUCT SPECIFICATION

86	56	# 2 H image size : V image size	10	00010000
87	57	# 2 H boarder ("0")	00	00000000
88	58	# 2 V boarder ("0")	00	00000000
89	59	Non-interlaced, Normal Display, Digital separate, Positive Hsync, Negative Vsync	1A	00011010
90	5A	NA	00	00000000
91	5B	NA	00	00000000
92	5C	NA	00	00000000
93	5D	NA	00	00000000
94	5E	NA	00	00000000
95	5F	NA	00	00000000
96	60	NA	00	00000000
97	61	NA	00	00000000
98	62	NA	00	00000000
99	63	NA	00	00000000
100	64	NA	00	00000000
101	65	NA	00	00000000
102	66	NA	00	00000000
103	67	NA	00	00000000
104	68	NA	00	00000000
105	69	NA	00	00000000
106	6A	NA	00	00000000
107	6B	NA	00	00000000
108	6C	Detailed Timing Description #4	00	00000000
109	6D	Flags	00	00000000
110	6E	Reserved	00	00000000
111	6F	For Brightness Table and Power Consumption	02	00000010
112	70	Flags	00	00000000
113	71	PWM % [7:0] @ Step 0 = 5%	0C	00001100
114	72	PWM % [7:0] @ Step 5 = 24%	3D	00111101
115	73	PWM % [7:0] @ Step 10 = 100%	FF	11111111
116	74	Nits [7:0] @ Step 0 = 13nits	0D	00001101
117	75	Nits [7:0] @ Step 5 = 60nits	3C	00111100
118	76	Nits [7:0] @ Step 10 = 250nits	7D	01111101
119	77	Panel Electronics Power @32x32 Chess Pattern =770mW	13	00010011
120	78	Backlight Power @60 nits =662mW	10	00010000
121	79	Backlight Power @Step 10 =2760mW	22	00100010
122	7A	Nits @ 100% PWM Duty =250nit	7D	01111101
123	7B	Flags	00	00000000
124	7C	Flags	00	00000000
125	7D	Flags	00	00000000
126	7E	Extension flag	00	00000000
127	7F	Checksum	D0	11010000

PRODUCT SPECIFICATION

Appendix. OUTLINE DRAWING

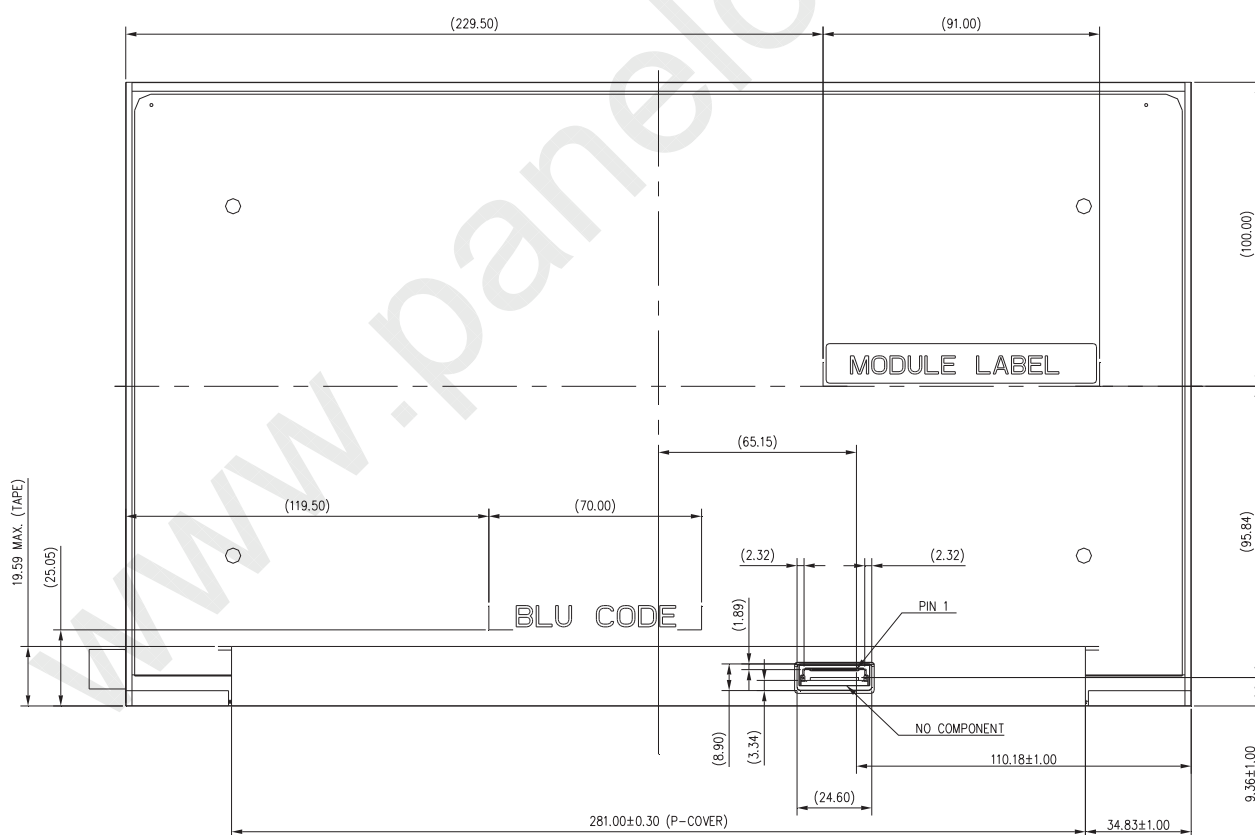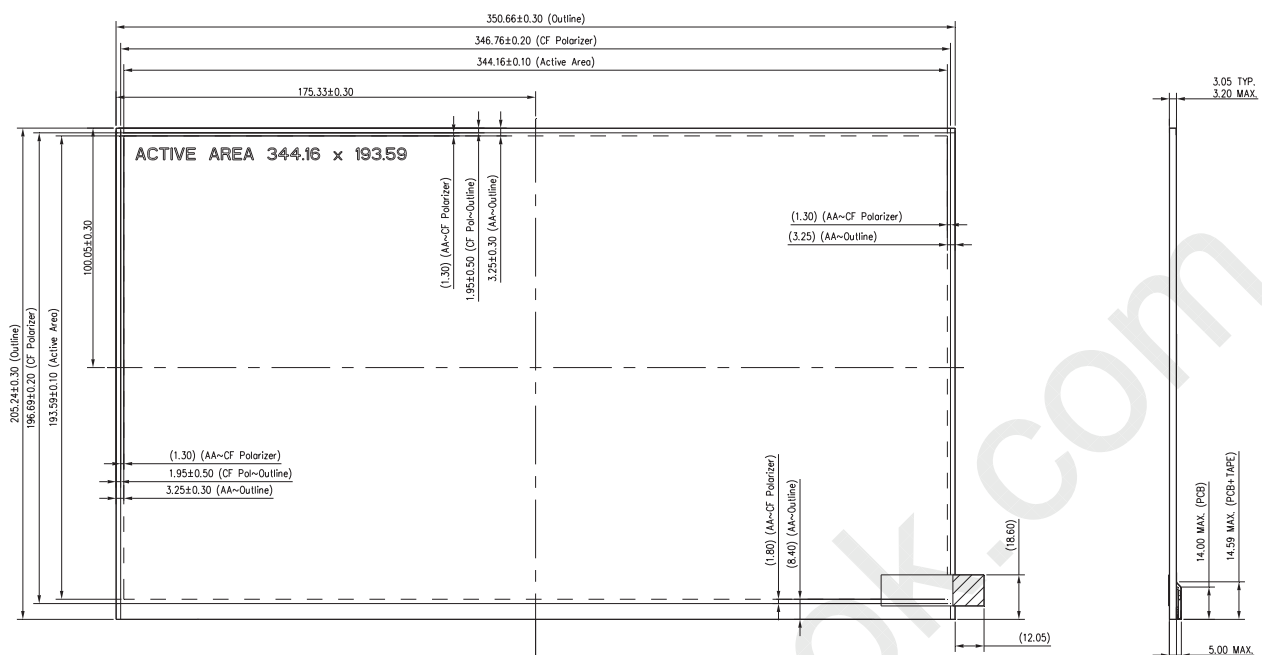

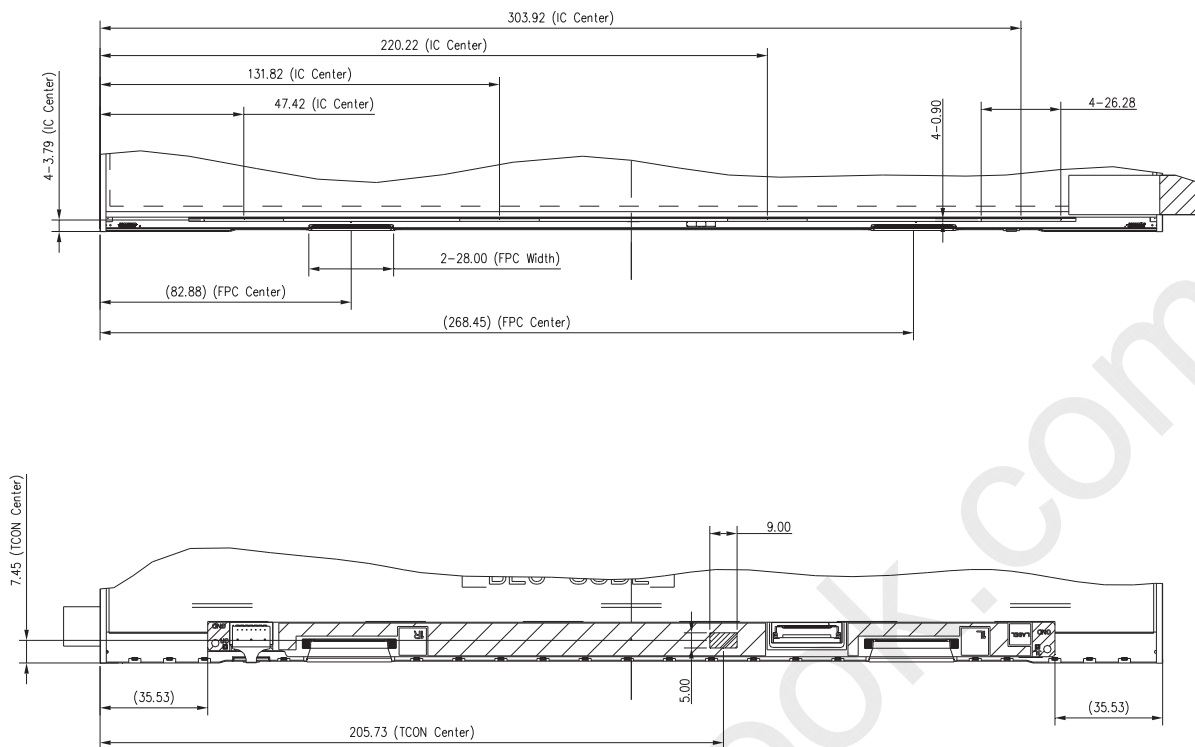

DRIVER IC, COF/FPC, TCON, AND VR LOCATIONS
SEE NOTES FOR EXPLANATION



NOTES :



1. IN ORDER TO AVOID ABNORMAL DISPLAY, POOLING AND WHITE SPOT, NO OVERLAPPING IS SUGGESTED AT CABLES, ANTENNAS, CAMERA, WLAN, WAN OR FOREIGN OBJECTS OVER FPC/COF, T-CON AND VR LOCATIONS.
2. LVDS/EDP CONNECTOR IS MEASURED AT PIN1 AND ITS MATING LINE.
3. "()" MARKS THE REFERENCE DIMENSION.
4. MEASUREMENT OF THICKNESS MUST BE MEASURED BY CALIPER OR MICROMETER.




Note. Dimensions measuring instruments as below,



1. Length/ Width/Thickness : Caliper
2. Height : Height gauge



Appendix. SYSTEM COVER DESIGN GUIDANCE



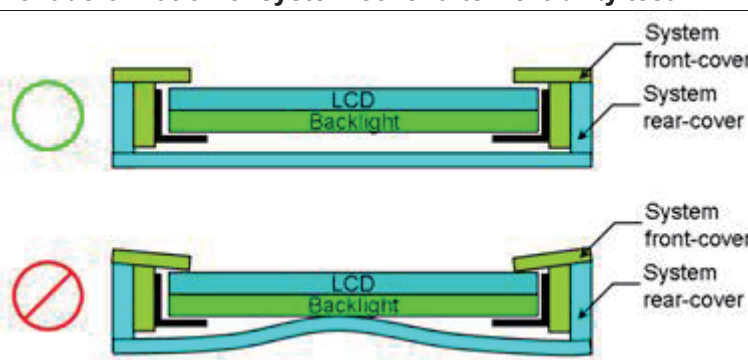
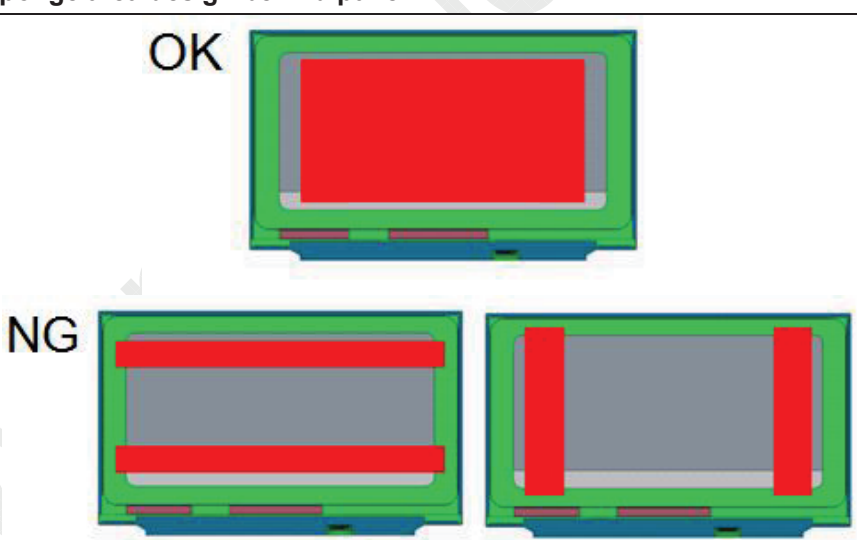
0.	Permanent deformation of system cover after reliability test
	
Definition	System cover including front and rear cover may deform during reliability test. Permanent deformation of system front and rear cover after reliability test should not interfere with panel. Because it may cause issues such as pooling, abnormal display, white spot, and also cell crack. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.
1	Sponge area design behind panel
	
Definition	Sponge area design behind panel can not be across the panel metal rear and the reflector at the same time. It can be on the reflector area only.
2	Gap between system rear-cover & panel
	
Definition	The maximum thickness of sponge on the system rear-cover can not interfere to the maximum thickness of panel. Because the interference may cause stress concentration.

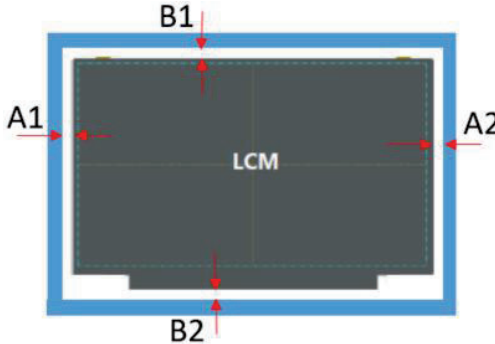	Issues such as pooling, abnormal display, white spot, and cell crack may occur. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.												
3	Gap Design between panel & around structure  <table><tr><th>Item</th><th>Suggestion</th><th>Remark</th></tr><tr><td>A1</td><td>$A1 \geq 0.5$</td><td rowspan="4">Gap $\geq$ Panel outline max. tolerance + Assembly max. tolerance</td></tr><tr><td>A2</td><td>$A2 \geq 0.5$</td></tr><tr><td>B1</td><td>$B1 \geq 0.5$</td></tr><tr><td>B2</td><td>$B2 \geq 0.8$</td></tr></table>	Item	Suggestion	Remark	A1	$A1 \geq 0.5$	Gap $\geq$ Panel outline max. tolerance + Assembly max. tolerance	A2	$A2 \geq 0.5$	B1	$B1 \geq 0.5$	B2	$B2 \geq 0.8$
Item	Suggestion	Remark											
A1	$A1 \geq 0.5$	Gap $\geq$ Panel outline max. tolerance + Assembly max. tolerance											
A2	$A2 \geq 0.5$												
B1	$B1 \geq 0.5$												
B2	$B2 \geq 0.8$												
Definition	Gap Design between panel & around structure needs to consider the maximum tolerances of panel outline and assembly at the same time. Gap Design suggestion is shown as A1/A2/B1/B2 on the chart.												
4	Gap between panel & bezel  2. Gap $\geq 0.1\text{mm}$ 1. Rib structure design holds the gap btw. bezel and panel surface.												
Definition	The gap between system bezel & panel surface is needed to prevent pooling or glass broken. Zero gap or interference such as burr and warpage from mold frame may cause pooling issue near system font-cover opening edge. This phenomenon is obvious during swing test, hinge test, knock test, or during pooling inspection procedure. To remain the sufficient gap, design with system rib higher than maximum panel thickness is recommended. The sufficient gap design is greater or equal to 0.1mm.												
5	Cable routing behind panel												

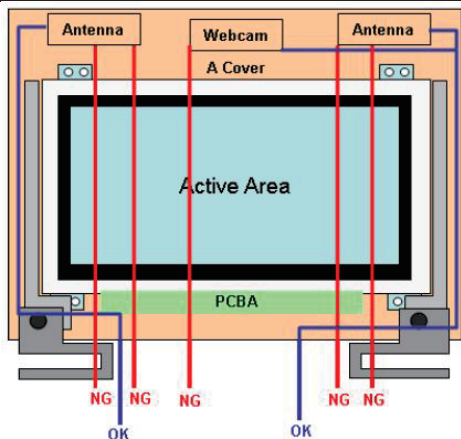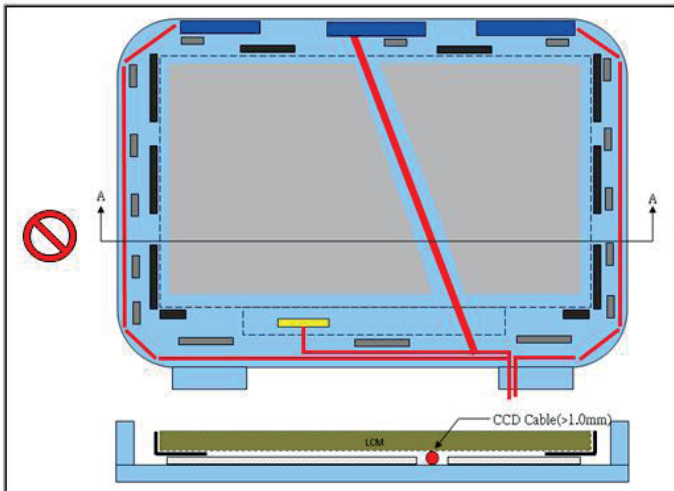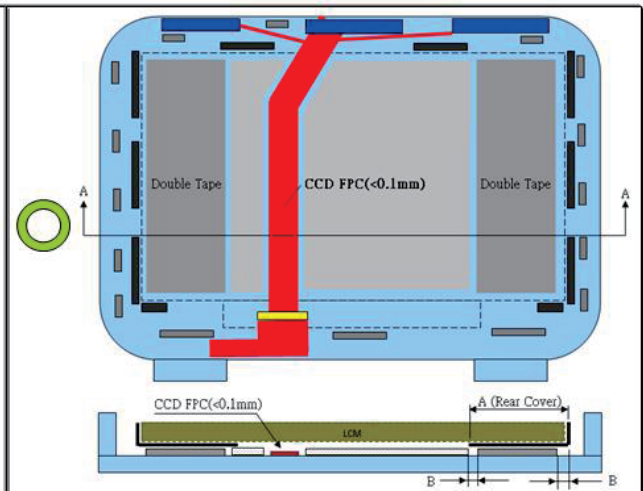																													
Definition	It is strongly recommended that cables route around the panel outline, not overlap with the panel outline (including PCB). Because issue such as abnormal display & white spot after backpack test, hinge test, twist test or pogo test may occur. If any routings across panel outline are needed, we suggest design as below: -Using FFC/FPC to replace cables. -Routing at the right or left area of panel metal rear. -Avoid any routings at the step of panel or A cover. -No interference to panel. -It should not overlap TCON, COF/FPC, Driver IC																												
6	Interference examination of antenna cable and Web Cam wire • To prevent panel damage, we suggest using CCD FPC to replace CCD cable • Using double tape to fix LCM module for no bracket design.																												
  <table><tr><td></td><td>Rear-cover</td><td></td><td>Connector</td></tr><tr><td></td><td>Sponge</td><td></td><td>Camera/Antenna</td></tr><tr><td></td><td>Double Tape</td><td></td><td>Stopper</td></tr><tr><td></td><td>CDD Cable/FPC</td><td></td><td>LCM Module</td></tr><tr><td></td><td>Hook</td><td></td><td>Panel outline</td></tr></table> <table><tr><td>Rear Cover Width(A)</td><td>A = 30mm</td></tr><tr><td>Cover edge to Double Tape(B)</td><td>B = 3.0mm</td></tr><tr><td>CCD FPC thickness</td><td><0.1mm</td></tr><tr><td>Sponge thickness</td><td>0.5mm 0.2~0.3mm(compressed)</td></tr></table>			Rear-cover		Connector		Sponge		Camera/Antenna		Double Tape		Stopper		CDD Cable/FPC		LCM Module		Hook		Panel outline	Rear Cover Width(A)	A = 30mm	Cover edge to Double Tape(B)	B = 3.0mm	CCD FPC thickness	<0.1mm	Sponge thickness	0.5mm 0.2~0.3mm(compressed)
	Rear-cover		Connector																										
	Sponge		Camera/Antenna																										
	Double Tape		Stopper																										
	CDD Cable/FPC		LCM Module																										
	Hook		Panel outline																										
Rear Cover Width(A)	A = 30mm																												
Cover edge to Double Tape(B)	B = 3.0mm																												
CCD FPC thickness	<0.1mm																												
Sponge thickness	0.5mm 0.2~0.3mm(compressed)																												
	If the antenna cable or Web Cam wire must overlap with the panel outline, both sides of the antenna cable or Web Cam wire must have a sponge(Sponge material can not contain NH3) and sponge require higher antenna cable or Web Cam wire.(Antenna cable or Web Cam wire should not overlap with TCON,COF/FPC,Driver IC) Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.																												
7	System rear-cover inner surface examination																												

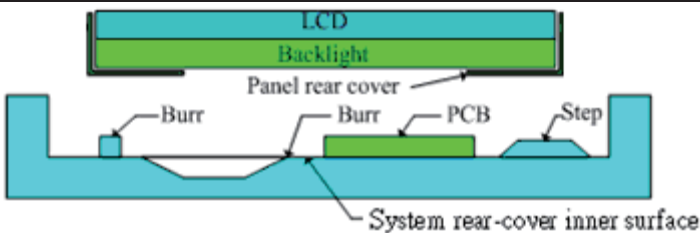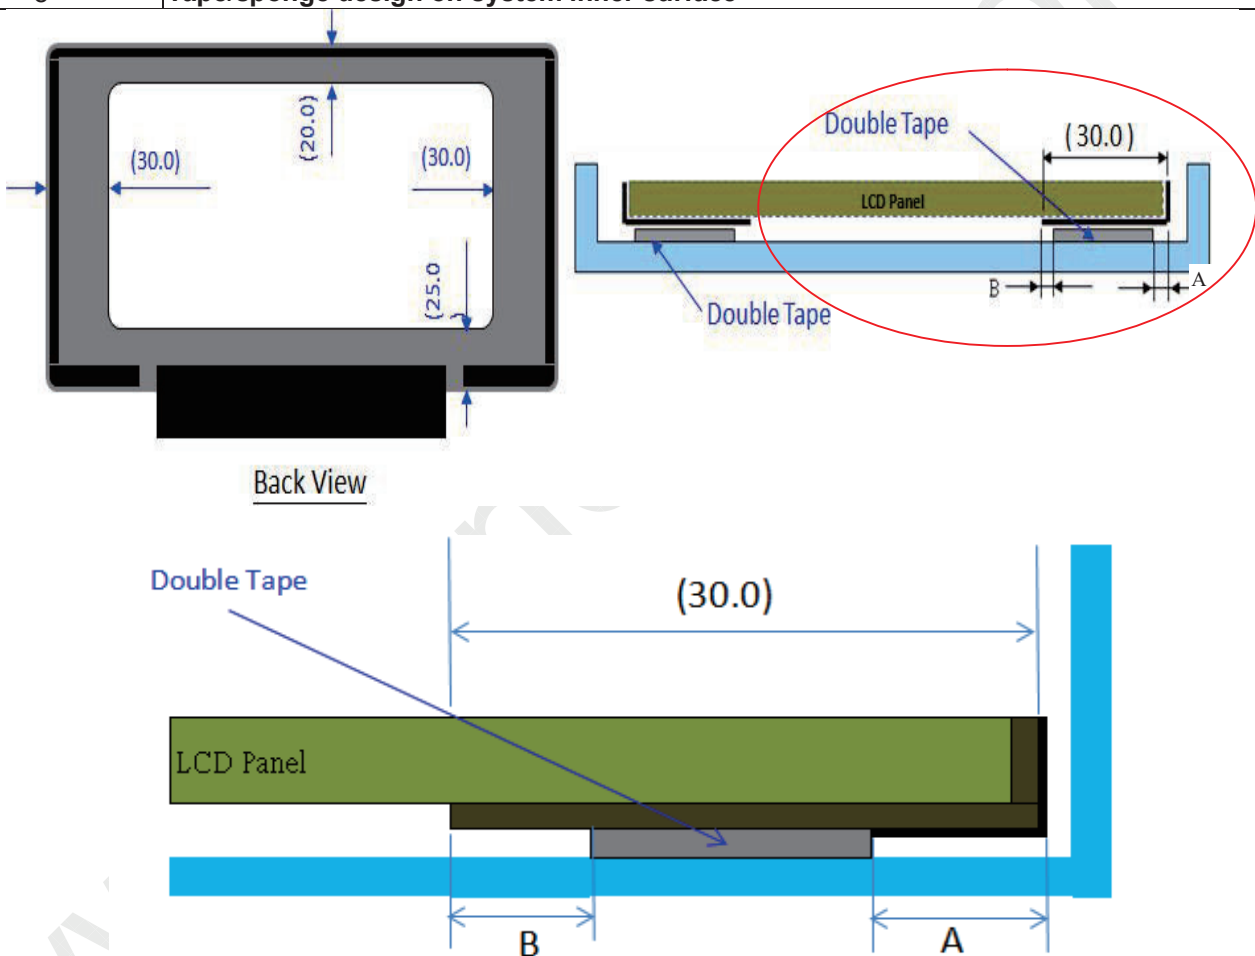
	
Definition	Burr at logo edge, steps, protrusions or PCB board may cause stress concentration. White spot or glass broken issue may occur during reliability test.
8	Tape/sponge design on system inner surface
 Back View	
Definition	To prevent peeling the bezel tape in rework process. The length of double tape is $30 - (A+B)$, A is bezel tape length and B is the double tape attaching tolerance. Ex :A :2mm, B:2mm, the length of double tape is $30-(2+2)=26\text{mm}$.
9	Material used for system rear-cover

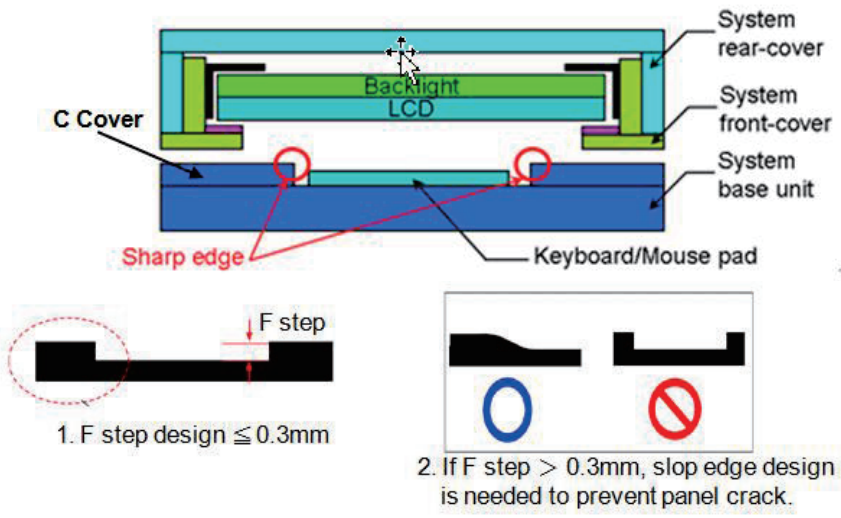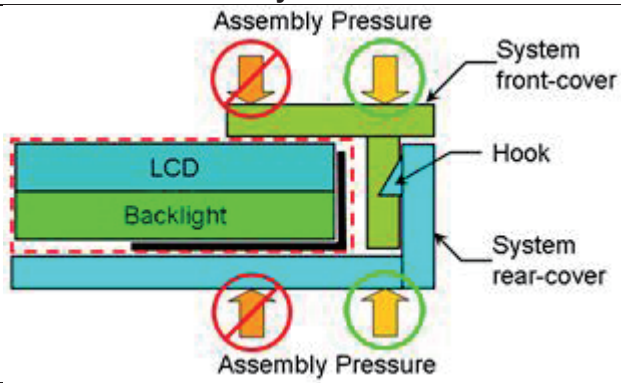 System rear-cover material: Al-Mg alloy System rear-cover thickness: 1.5mm MIN	
Definition	System rear-cover material with high rigidity is needed to resist deformation during scuffing test, hinge test, pogo test, or backpack test. Abnormal display, white spot, pooling issue may occur if low rigidity material is used. Solid structure design of system rear-cover may also influence the rigidity of system rear-cover. The deformation of system rear-cover should not caused interference.
10	C cover shape design 
Definition	The F step design on C Cover less than or equal to 0.3mm is recommended. If F step exceeds 0.3mm, the slop edge design is necessary to prevent panel crack.
11	Assembly SOP examination for system front-cover with Hook design 
Definition	To prevent panel crack during system front-cover assembly process with hook design, it is not recommended to press panel or any location that related directly to the panel.
12	Adhesive design between panel & bezel

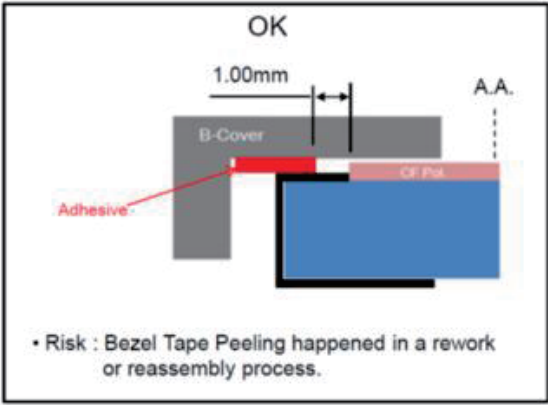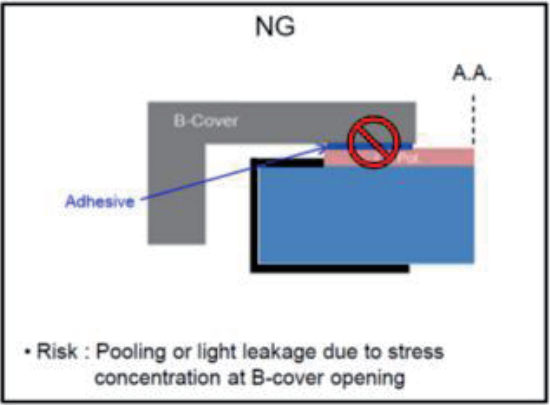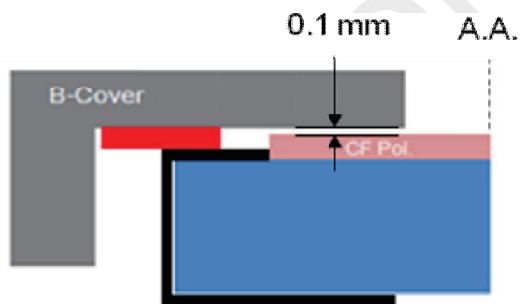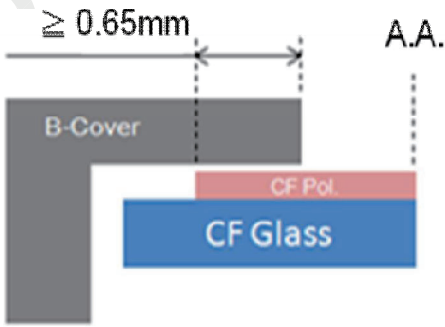OK  • Risk : Bezel Tape Peeling happened in a rework or reassembly process. NG  • Risk : Pooling or light leakage due to stress concentration at B-cover opening	
Definition	To prevent panel crack during system front-cover assembly process with double tape design, When system applied adhesive between B-Cover and LCD module, please design a distance 1.00mm between B-Cover's adhesive and CF pol. Do NOT put adhesive on CF pol. Adhesive material need be qualified to prevent from doing damage to cell tape after rework. Adhesive material need be qualified to prevent abnormal noise when hinge swinging test.
13	System front-cover assembly reference with Double tape design
	
Definition	To prevent system front-cover peeling at double tape contact area, A gap between B-Cover & CF-Pol. Is 0.1mm min.
14	System front-cover opening area reference with TFT-LCD module
	
Definition	To prevent panel the noise of B-cover & CF Pol. Distance from CF Pol. edge to front-cover edge more than 0.65mm.

15


Touch Application : TP and LCD Module Combination for White Line Prevention

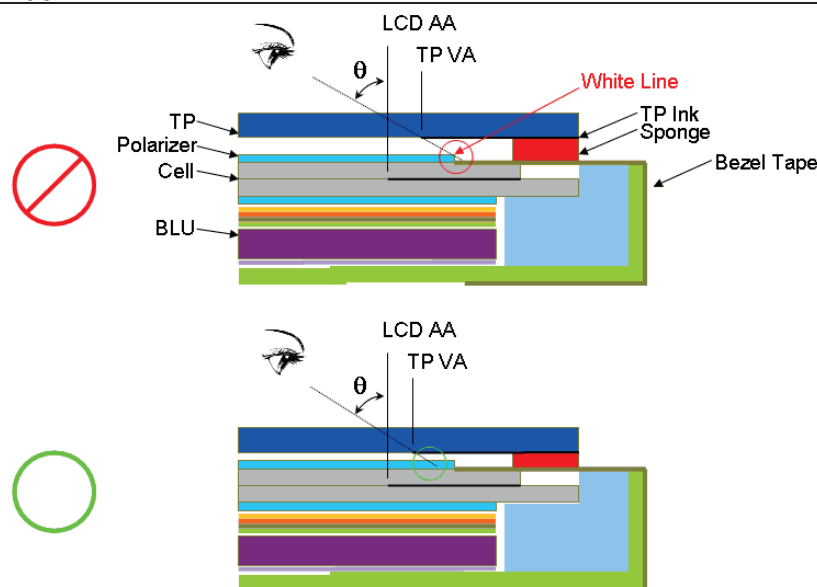

Parameter consideration for White Line Issue :

1	TP VA to LCD AA distance
2	TP Assembly tolerance
3	TP Ink Printing tolerance
4	Sponge thickness and tolerance
5	Inspection/Viewing Angle specification
6	Polarizer edge to LCD AA distance and tolerance

Polarizer edge to LCD AA distance can be derived by “AA~Outline” – “CF Pol~Outline” with respect to INX 2D Outline Drawing on each side.

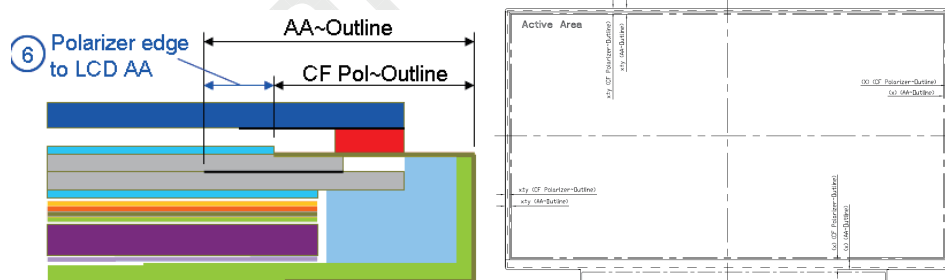

Definition


For using in Touch Application: to prevent White Line appears between TP and LCD module combination, the maximum inspection angle location must not fall onto LCD polarizer edge, otherwise light line near edge of polarizer will be appear.



Parameters such as TP VA to LCD AA distance, TP assembly tolerance, TP Ink printing tolerance, Sponge thickness and tolerance, and Maximum Inspection/Viewing Angle, must be considered with respect to LCD module's Polarizer edge location and tolerance. This consideration must be taken at all four edges separately.

The goal is to find parameters combination that allow maximum inspection angle falls inside polarizer black margin area.

Note: Information for Polarizer edge location and its tolerance can be derived from INX 2D Outline Drawing (“AA ~Outline” - “CF Pol~Outline”).

Note: Please feel free to contact INX FAE Engineer. By providing value of parameters above on each side, we can help to verify and pass the white line risk assessment for customer reference.

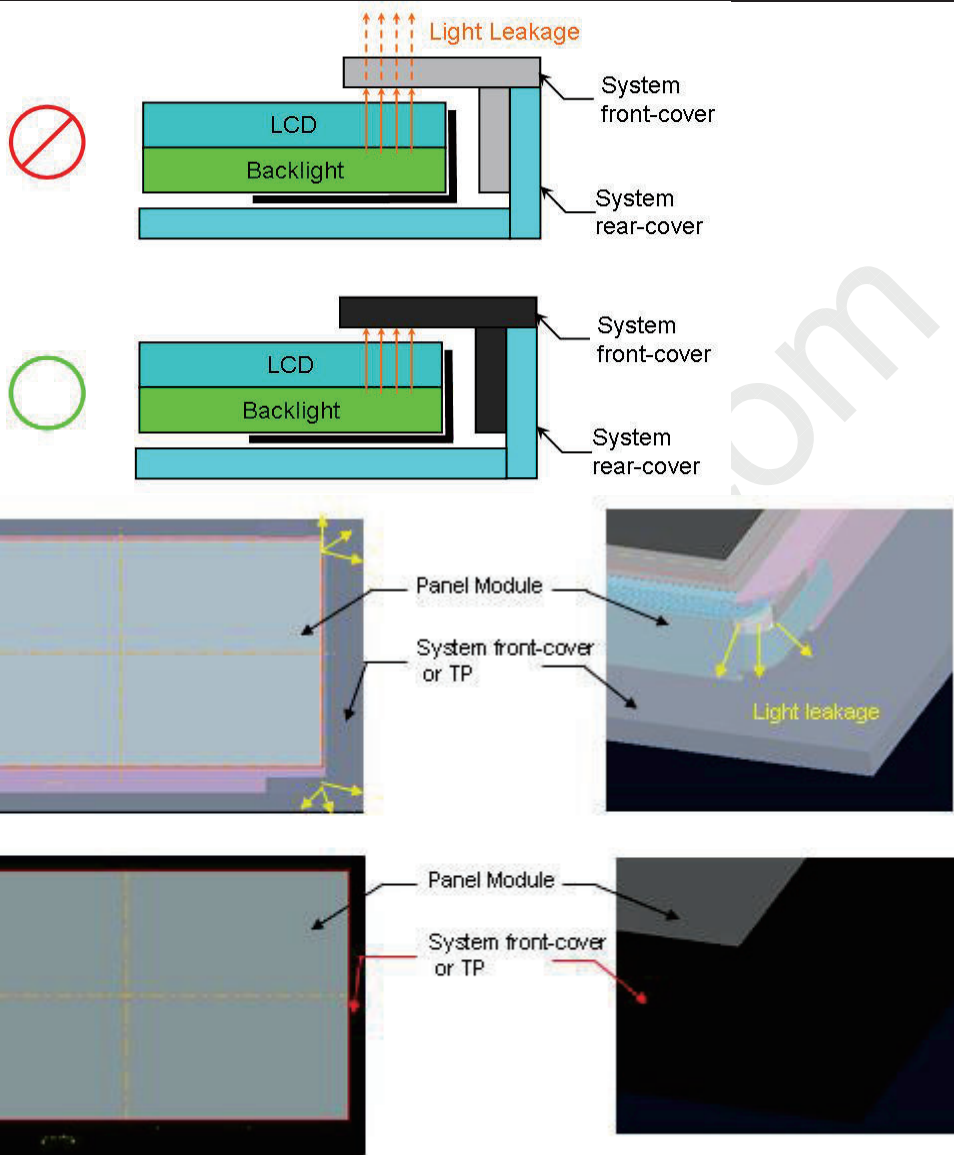16	Color of system front-cover material
	 The diagrams illustrate the importance of using dark-colored material for the system front-cover to prevent light leakage. The top section shows a cross-section of the LCD assembly with labels for 'LCD', 'Backlight', 'System front-cover', and 'System rear-cover'. It compares a light-colored front-cover (marked with a red prohibition sign) which causes 'Light Leakage' (indicated by orange arrows), with a dark-colored front-cover (marked with a green circle) which prevents it. The bottom section shows a top-down view of the 'Panel Module' and 'System front-cover or TP' (marked with a red prohibition sign), and a corresponding 3D cutaway view showing 'Light leakage' (indicated by yellow arrows) from the light-colored cover. The correct design, marked with a green circle, shows the dark front-cover preventing such leakage.
Definition	To prevent light leakage is seen at system front-cover due to material transparency, we suggest using dark color material (black) for system front-cover design.

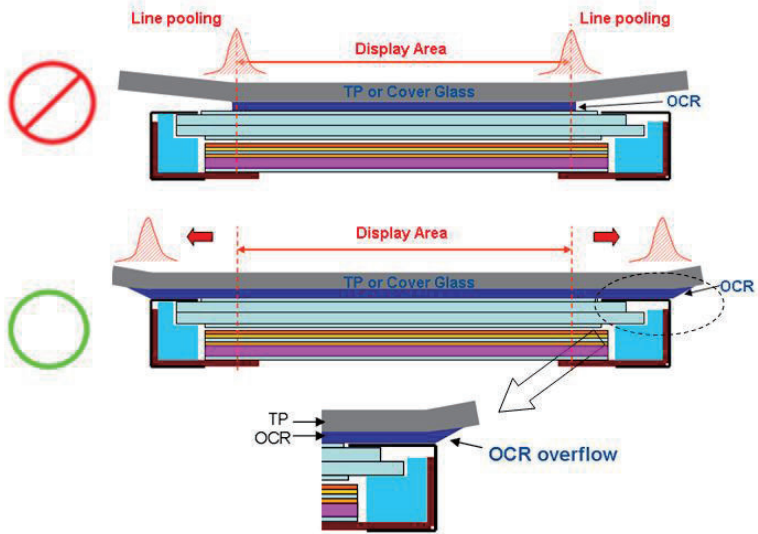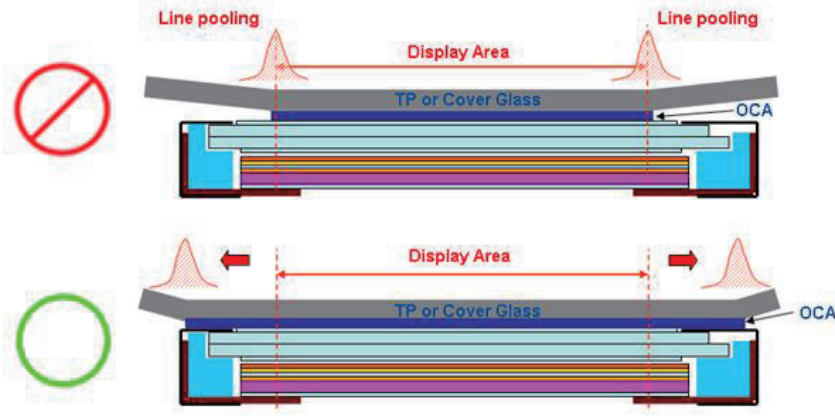17	Use OCR Lamination
	
Definition	OCR glue as possible beyond module, in order to avoid Line Pooling
18	Use OCA Lamination
	
Definition	OCA glue as possible plastered throughout the module, in order to avoid Line Pooling.

Appendix. LCD MODULE HANDLING MANUAL

Purpose	- This SOP is prepared to prevent panel dysfunction possibility through incorrect handling procedure. - This manual provides guide in unpacking and handling steps. - Any person which may contact / related with panel, should follow guide stated in this manual to prevent panel loss.
1.	Unpacking
  Open carton  Remove EPE Cushion   Open plastic bag  Cut Adhesive Tape  Remove EPE Cushion	
2.	Panel Lifting
 Remove PET Cover  Remove PE Foam  Handle with care (see next page)  Finger Slot Use slots at both sides for finger insertion. Handle panel upward with care.	

3. Do and Don't

Do :

- Handle with both hands.
- Handle panel at left and right edge.



Don't :

- Lifting with one hand.



- Handle at PCBA side.



Don't :

- Stack panels.



- Press panel.



Don't :

- Put foreign stuff onto panel



- Put foreign stuff under panel



Don't :

- Paste any material unto white reflector sheet



Don't :

- Pull / Push white reflector sheet



Don't :

- Hold at panel corner.




Don't :

- Twist panel.



Do :

- Hold panel at top edge while inserting connector.

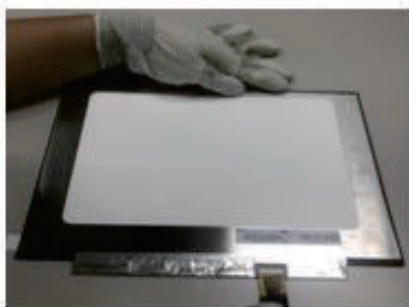

Don't :

- Press white reflector sheet while inserting connector.



Do :

- Remove panel protector film starts from pull tape



Don't :

- Remove panel protector film From film another side.



Do:

- Remove panel protector film starts from Lower-right corner to Top-left

**Don't:**

- Remove panel protector Film parallel X-direction

**Don't :**

- Touch or Press PCBA Area.

