



PRODUCT SPECIFICATION

Doc. Number:

- ☐ Tentative Specification
☒ Preliminary Specification
☐ Approval Specification

MODEL NO.: N156KME
SUFFIX: GNA Rev.C1

Customer: ASUS**APPROVED BY****SIGNATURE****Name / Title**

Note :

Please return 1 copy for your confirmation with your signature and comments.

Approved By	Checked By	Prepared By



CONTENTS

1. GENERAL DESCRIPTION	4
1.1 OVERVIEW	4
2. MECHANICAL SPECIFICATIONS	5
2.1 CONNECTOR TYPE	5
3. ABSOLUTE MAXIMUM RATINGS	6
3.1 ABSOLUTE RATINGS OF ENVIRONMENT	6
3.2 ELECTRICAL ABSOLUTE RATINGS.....	7
3.2.1 TFT LCD MODULE	7
4. ELECTRICAL SPECIFICATIONS.....	7
4.1 FUNCTION BLOCK DIAGRAM	7
4.2. INTERFACE CONNECTIONS	7
4.3 ELECTRICAL CHARACTERISTICS.....	10
4.3.1 LCD ELETRONICS SPECIFICATION.....	10
4.3.2 LED CONVERTER SPECIFICATION.....	12
4.3.3 BACKLIGHT UNIT	14
4.4 DISPLAY PORT INPUT SIGNAL TIMING SPECIFICATIONS	15
4.4.1 DISPLAY PORT INTERFACE	15
4.5 DISPLAY TIMING SPECIFICATIONS	17
4.6 POWER ON/OFF SEQUENCE	18
5. OPTICAL CHARACTERISTICS	21
5.1 TEST CONDITIONS.....	21
5.2 OPTICAL SPECIFICATIONS	21
6. RELIABILITY TEST ITEM	26
7. PACKING	27
7.1 MODULE LABEL	27
7.2 CARTON	28
7.3 PALLET	29
7.4 UN-PACKAGING METHOD	30
8. PRECAUTIONS	31
8.1 HANDLING PRECAUTIONS.....	31
8.2 STORAGE PRECAUTIONS	31
8.3 OPERATION PRECAUTIONS.....	31
Appendix. EDID DATA STRUCTURE (TBD)	32
Appendix. OUTLINE DRAWING	38
Appendix. SYSTEM COVER DESIGN GUIDANCE.....	40
Appendix. LCD MODULE HANDLING MANUAL.....	49



PRODUCT SPECIFICATION

REVISION HISTORY

Version	Date	Page	Description
1.0	Jul. 17, 2020	All	Preliminary Spec Ver.1.0 was first issued.



1. GENERAL DESCRIPTION

1.1 OVERVIEW

N156KME-GNA is a 15.6" (15.6" diagonal) TFT Liquid Crystal Display NB module with LED Backlight unit and 40 pins eDP interface. This module supports 2560 x 1440 QHD mode and can display 16.7M colors.

1.2 GENERAL SPECIFICATIONS

Item	Specification	Unit	Note
Screen Size	15.6" diagonal		
Driver Element	a-si TFT active matrix	-	-
Pixel Number	2560 x R.G.B. x 1440	pixel	-
Pixel Pitch	0.1345 (H) x 0.1345 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	16,777,216	color	-
Color depth	8 bit		
Transmissive Mode	Normally black	-	-
Surface Treatment	Hard coating (3H), Anti-Glare	-	-
Color Gamut	100%	DCI-P3	
Luminance, White	300	Cd/m2	
Response Time	Typ:TR 5 / TF 4	ms	
Contrast Ratio	Typ:1000/Min:800		
Border size(L/R/U)	3.22/3.22/3.23	mm	
View Angle(U/D/R/L)	89/89/89/89	Deg	
Backlight Unit	LEDs 11 strings x 6 parallel		
Electrical Interface	eDP 1.3		
RoHs Compliance	Yes		
Power Consumption	Total (8.01) W (Max.)@cell (3.13) W (Max.), BL (4.88)W(Max.)		(1)
Special Function	DPCD Rev.1.2 DMRRS(Support)G-sync DD (Support) G-sync nVSR (Not support) Free-sync (Support) Static DRRS (Support) Seamless DRRS(sDRRS)(Support) DMRRS(Support) PSR Version(PSR1)(Support) CABC(Not support)		

Note (1) The specified power consumption (with converter efficiency) is under the conditions at VCCS = 3.3 V, fv = 60 Hz, LED_VCCS = Typ, fPWM = 200 Hz, Duty=100% and Ta = 25 ± 2 °C, whereas mosaic pattern is displayed.

Note (2) Display port interface signals should follow VESA DisplayPort Standard Version1. Revision 1a and VESA Embedded DisplayPort™ Standard Version 1.3 (eDP1.3). There are many optional items described in eDP1.3. If some optional item is requested, please contact us.

2. MECHANICAL SPECIFICATIONS

	Item	Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	350.36	350.66	350.96	mm	(1) (2)
	Vertical (V)	204.94	205.24	205.54	mm	
	Thickness (T)	-	2.45	2.6	mm	
Active Area	Horizontal	344.12	344.22	344.32	mm	
	Vertical	193.52	193.62	193.72	mm	
Weight		-	285	300	g	

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Note (2) Dimensions are measured by caliper.



2.1 CONNECTOR TYPE

Please refer Appendix Outline Drawing for detail design.

Connector Part No.: I-PEX 20455-040E-76 JAE HD1S040HA3

User's connector Part No: IPEX-20453-040T-03

3. ABSOLUTE MAXIMUM RATINGS

3.1 ABSOLUTE RATINGS OF ENVIRONMENT


Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T _{ST}	-20	+60	°C	(1)
Operating Ambient Temperature	T _{OP}	0	+50	°C	(1), (2)
Shock (Non-Operating)	S _{NOP}	--	220/2	G/ms	(3),(4),(5)
Vibration (Non-Operating)	V _{NOP}	--	1.5	G	(3),(4),(6)

Note (1) (a) 90 %RH Max. (Ta < 40 °C).

(b) Wet-bulb temperature should be 39 °C Max.

(c) No condensation.

Note (2) The temperature of panel surface should be 0 °C min. and 60 °C max.

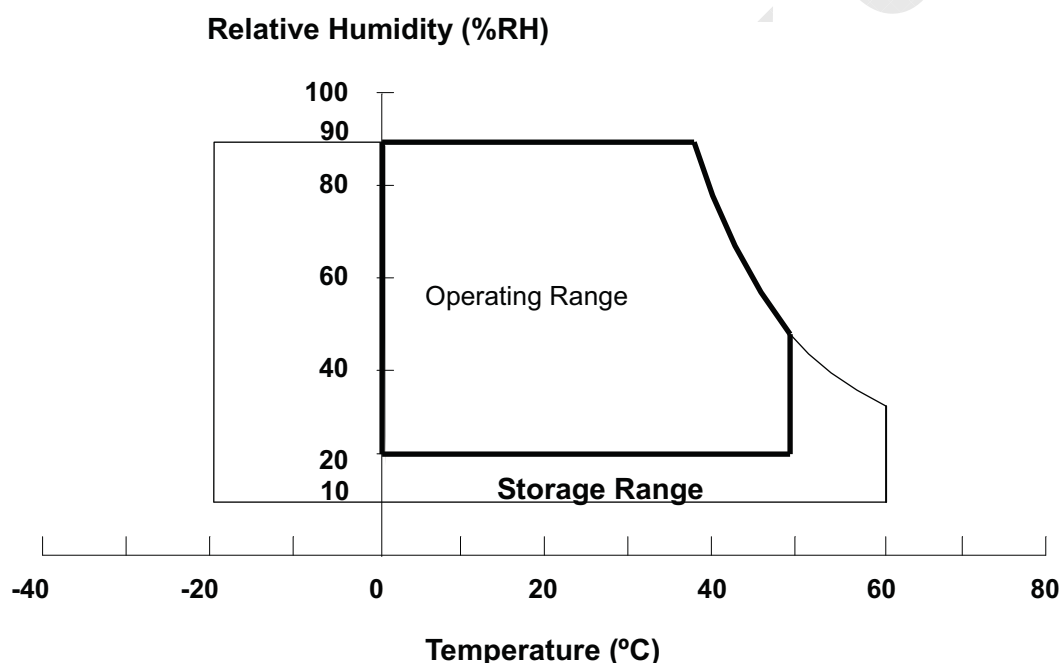

Note (3) criteria: Normal display image with no obvious non-uniformity and no line defect.

Note (4) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

Note (5) half sine wave, 1 time for each direction of $\pm X, \pm Y, \pm Z$

Note (6) 10-500 Hz, Sine wave, 30 min/cycle, 1cycle for each X, Y, Z

3.2 ELECTRICAL ABSOLUTE RATINGS


3.2.1 TFT LCD MODULE

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCCS	-0.3	+4.0	V	(1)
Logic Input Voltage	V _{IN}	-0.3	VCCS+0.3	V	
Converter Input Voltage	LED_VCCS	-0.3	(26)	V	(1)
Converter Control Signal Voltage	LED_PWM,	-0.3	(5)	V	(1)
Converter Control Signal Voltage	LED_EN	-0.3	(5)	V	(1)

Note (1) Stresses beyond those listed in above “ELECTRICAL ABSOLUTE RATINGS” may cause permanent damage to the device. Normal operation should be restricted to the conditions described in “ELECTRICAL CHARACTERISTICS”.

4. ELECTRICAL SPECIFICATIONS

4.1 FUNCTION BLOCK DIAGRAM

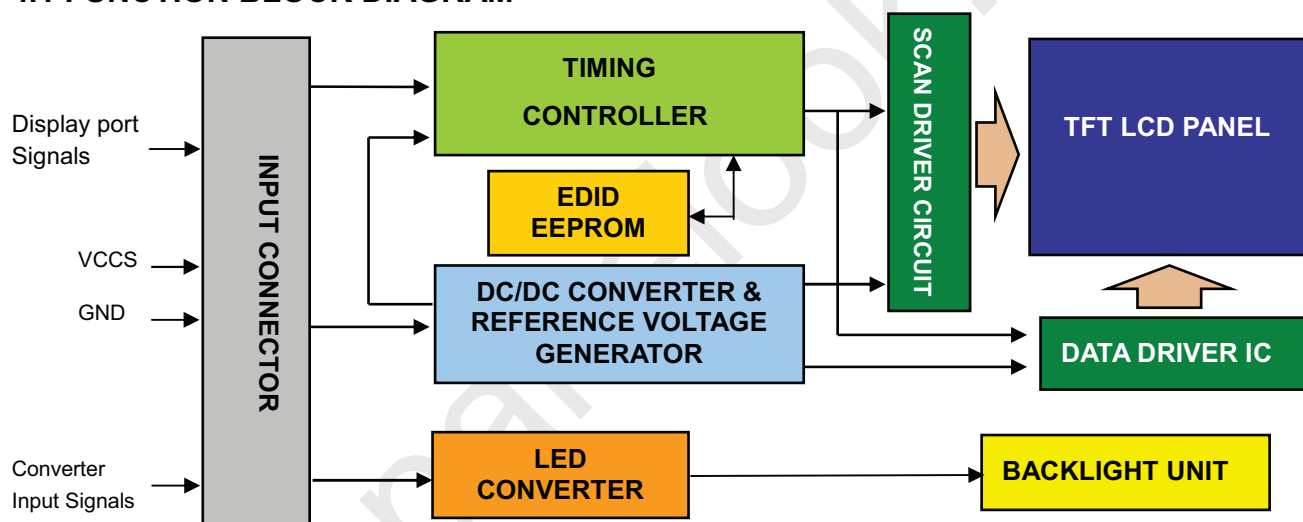

4.2. INTERFACE CONNECTIONS

PIN ASSIGNMENT

Pin	Symbol	Description	Remark
1	NC	No Connection (Reserved for LCD test)	-
2	H_GND	High Speed Ground	-
3	Lane3_N	Complement Signal Link Lane 3	-
4	Lane3_P	True Signal Link Lane 3	-
5	H_GND	High Speed Ground	-
6	Lane2_N	Complement Signal Link Lane 2	-
7	Lane2_P	True Signal Link Lane 2	-
8	H_GND	High Speed Ground	-
9	Lane1_N	Complement Signal Link Lane 1	-
10	Lane1_P	True Signal Link Lane 1	-
11	H_GND	High Speed Ground	-
12	Lane0_N	Complement Signal Link Lane 0	-




13	Lane0_P	True Signal Link Lane 0	-
14	H_GND	High Speed Ground	-
15	AUX_CH_P	True Signal Auxiliary Channel	-
16	AUX_CH_N	Complement Signal Auxiliary Channel	-
17	H_GND	High Speed Ground	-
18	VCCS	LCD logic and driver power	-
19	VCCS	LCD logic and driver power	-
20	VCCS	LCD logic and driver power	-
21	VCCS	LCD logic and driver power	-
22	NC	No Connection (Reserved for LCD test)	-
23	GND	LCD logic and driver ground	-
24	GND	LCD logic and driver ground	-
25	GND	LCD logic and driver ground	-
26	GND	LCD logic and driver ground	-
27	HPD	HPD signal pin	-
28	BL_GND	Backlight ground	-
29	BL_GND	Backlight ground	-
30	BL_GND	Backlight ground	-
31	BL_GND	Backlight ground	-
32	LED_EN	Backlight on /off	-
33	LED_PWM	System PWM signal input for dimming	-
34	NC	No Connection (Reserved for LCD test)	-
35	NC	No Connection (Reserved for LCD test)	-
36	LED_VCCS	Backlight power	-
37	LED_VCCS	Backlight power	-
38	LED_VCCS	Backlight power	-
39	LED_VCCS	Backlight power	-
40	OD_EN	OD function default off which can be enable by pull low	(2)

f


Note (1) The first pixel is odd as shown in the following figure.

PRODUCT SPECIFICATION

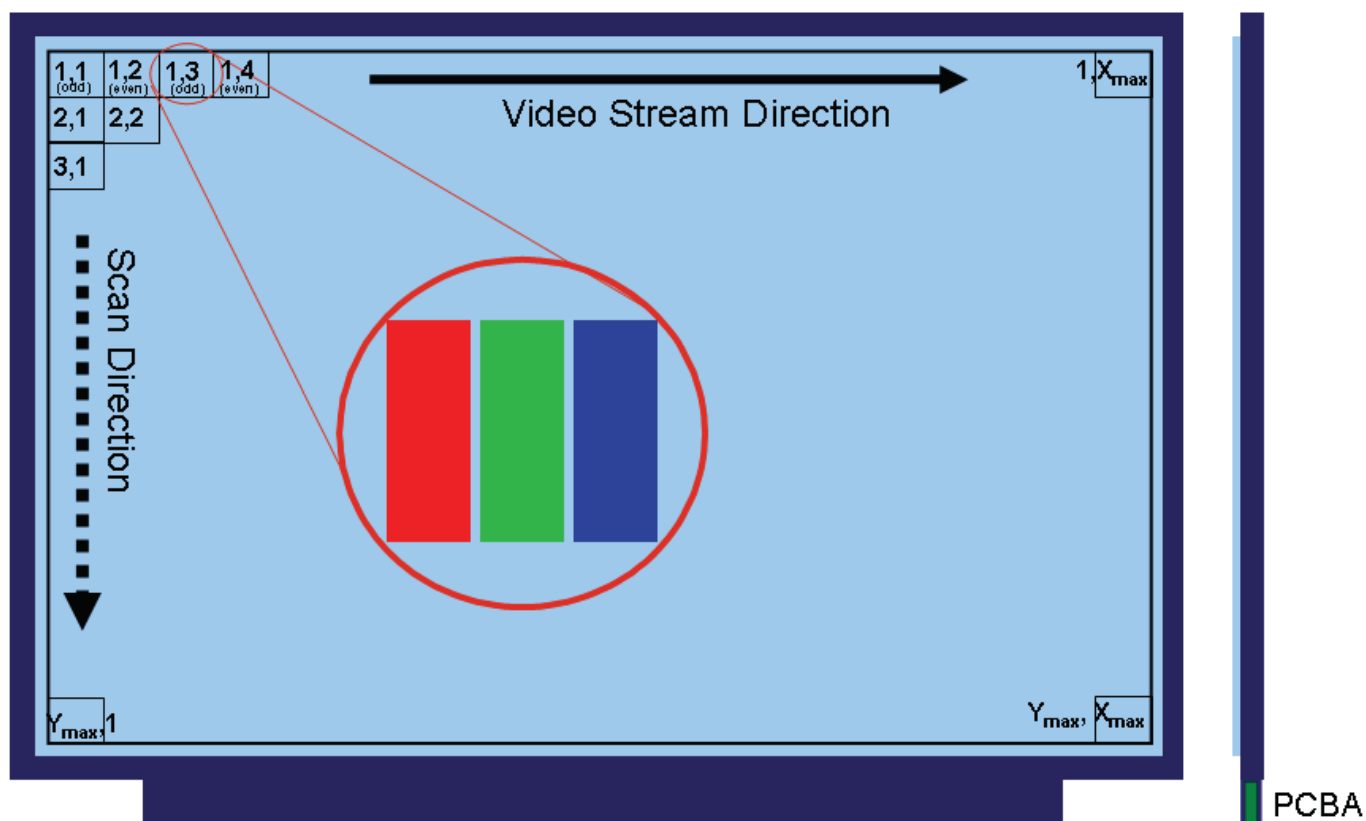

Note (2) The setting of OD function are as follows.

Pin	Enable	Disable
OD EN	Low Level	Open

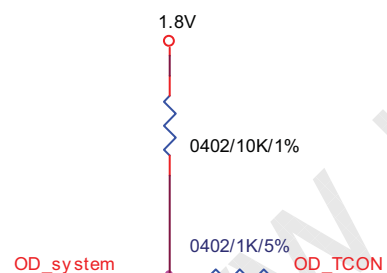

4.3 ELECTRICAL CHARACTERISTICS

4.3.1 LCD ELETRONICS SPECIFICATION


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		VCCS	3.0	3.3	3.6	V	(1)-
Ripple Voltage		V _{RP}	-		100	mV	(1)-
Inrush Current		I _{RUSH}	-	-	1.5	A	(1),(2)
Power Supply Current	Mosaic	I _{CC}		(790)	(948)	mA	(3)a
	Black			(777)	(933)	mA	(3)
HPD	High Level		2.25	-	3.6	V	(4)
	Low Level		0	-	0.4	V	(4)
HPD Impedance		R _{HPD}	30K			ohm	(4)

Note (1) The ambient temperature is $T_a = 25 \pm 2^\circ\text{C}$.

Note (2) I_{RUSH}: the maximum current when VCCS is rising


I_{IS}: the maximum current of the first 100ms after power-on

Measurement Conditions: Shown as the following figure. Test pattern: black.

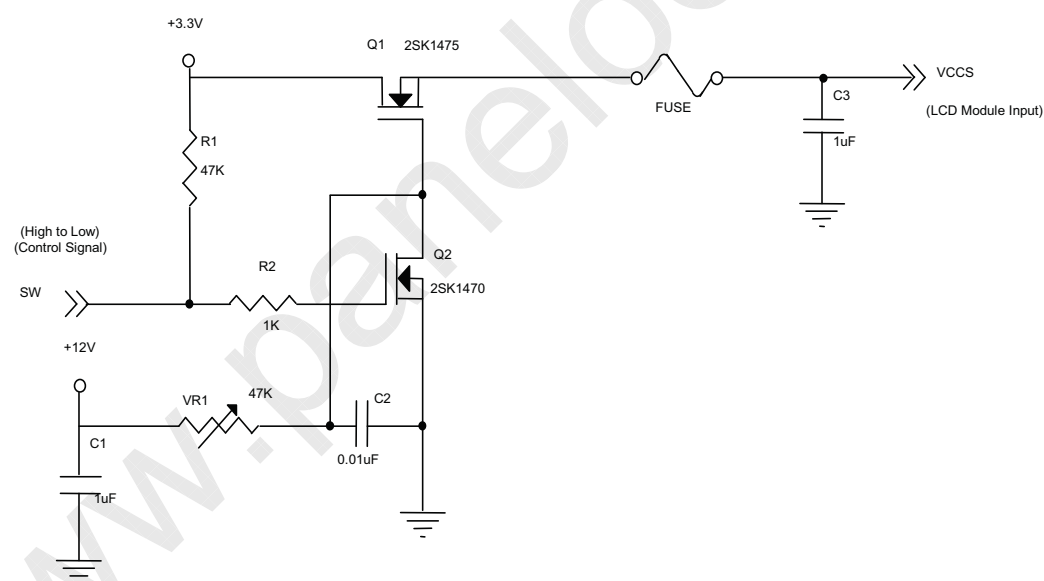


VCCS r-eDP Display

0.5ms

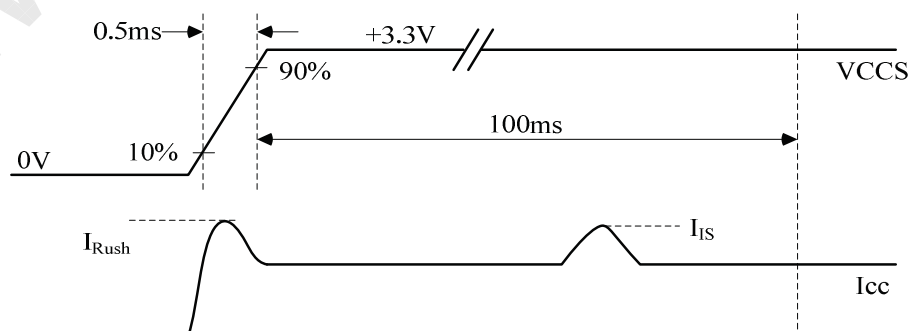

Note (3) The specified power supply current is under the conditions at $V_{CCS} = 3.3\text{ V}$, $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$, DC Current and $f_v = 60\text{ Hz}$, whereas a specified power dissipation check pattern is displayed

a. Mosaic Pattern

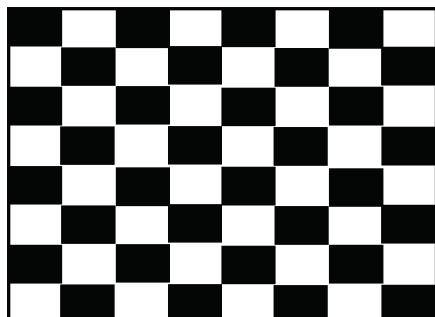

Active Area

Note (4) The specified signals have equivalent impedances pull down to ground in the LCD module respectively. Customers should keep the input signal level requirement with the load of LCD module. Please refer to Note (4) of 4.3.2 LED CONVERTER SPECIFICATION to obtain more information.


4.3.2 LED CONVERTER SPECIFICATION


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Converter Input power supply voltage		LED_Vccs	7	12	21	V	
Converter Inrush Current		I _{LED_RUSH}	-	-	1.5	A	(1)
LED_EN Control Level	Backlight On		2.2	-	5	V	(4)
	Backlight Off		0	-	0.6	V	(4)
LED_EN Impedance		R _{LED_EN}	30K -	-		ohm	(4)
PWM Control Level	PWM High Level		2.2	-	5	V	(4)
	PWM Low Level		0	-	0.6	V	(4)
PWM Impedance		R _{PWM}	30K -	-		ohm	(4)
PWM Control Duty Ratio			5	-	100	%	
PWM Control Permissive Ripple Voltage		V _{PWM_pp}	-	-	100	mV	
PWM Control Frequency		f _{PWM}	190	-	(10K)	Hz	(2)
LED Power Current	LED_VCCS =Typ.	I _{LED}	330	390	407	mA	(3)

Note (1) I_{LED_RUSH}: the maximum current when LED_VCCS is rising,

I_{LED_IS}: the maximum current of the first 100ms after power-on,

Measurement Conditions: Shown as the following figure. LED_VCCS = Typ, Ta = 25 ± 2 °C, f_{PWM} = 200 Hz, Duty=100%.

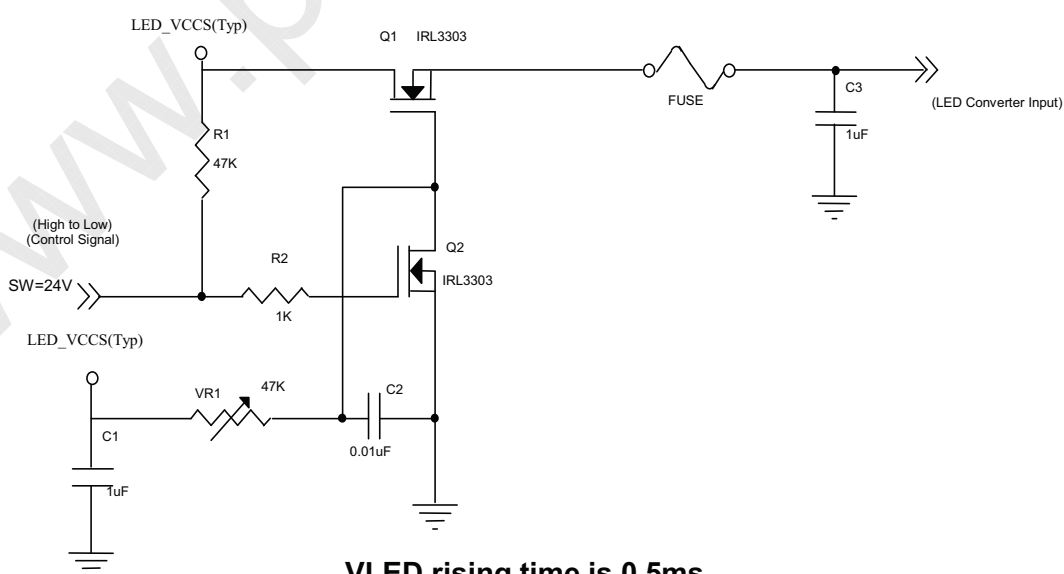

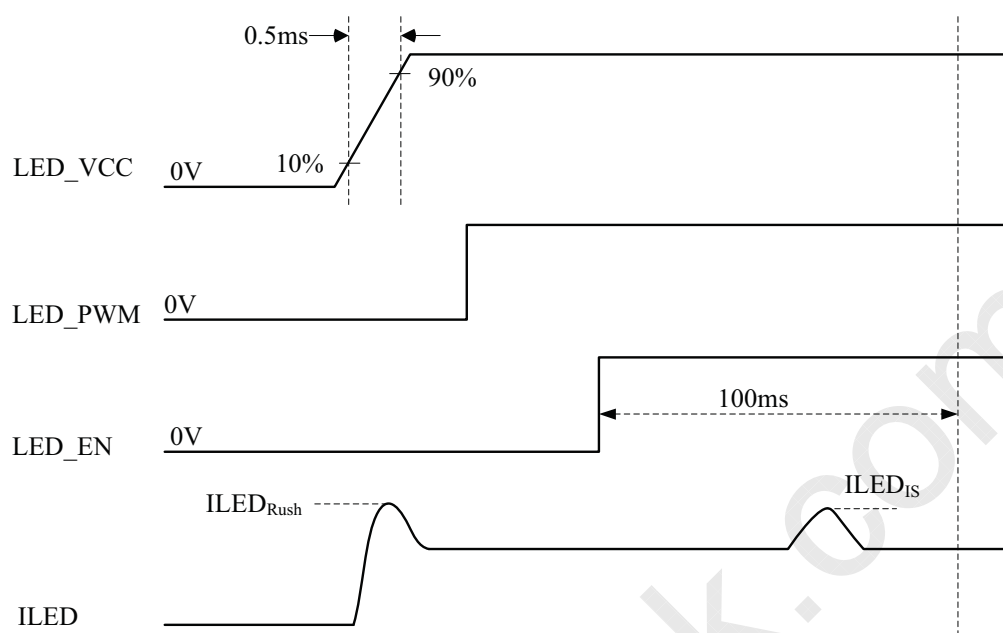

Note (2) If PWM control frequency is applied in the range less than 1KHz, the “waterfall” phenomenon on the screen may be found. To avoid the issue, it's a suggestion that PWM control frequency should follow the criterion as below.

PWM control frequency f_{PWM} should be in the range


$$(N + 0.33) * f \leq f_{PWM} \leq (N + 0.66) * f$$

N : Integer ($N \geq 3$)

f : Frame rate

Note (3) The specified LED power supply current is under the conditions at “LED_VCCS = Typ.”, $T_a = 25 \pm 2^\circ\text{C}$, $f_{PWM} = 200\text{ Hz}$, Duty=100%.

Note (4) The specified signals have equivalent impedances pull down to ground in the LCD module respectively. Customers should keep the input signal level requirement with the load of LCD module. For example, the figure below describes the equivalent pull down impedance of LED_EN (If it exists). The rest pull down impedances of other signals (eg. HPD, PWM ...) are in the same concept.

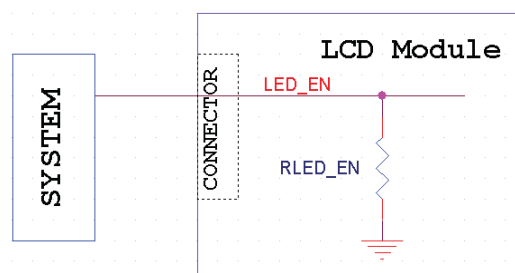


Note (5) If the cycle-to-cycle difference of PWM duty exceeds 0.1%, especially when the PWM duty is low, slight brightness change might be observed.

4.3.3 BACKLIGHT UNIT

 $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
LED Light Bar Power Supply Voltage	V _L	29.7	31.9	33	V	(1)(2)(Duty100%)
LED Light Bar Power Supply Current	I _L	-	127.2	-	mA	
Power Consumption	P _L	-	4.058	4.198	W	(3)
LED Life Time	L _{BL}	15000	-	-	Hrs	(4)

Note (1) LED current is measured by utilizing a high frequency current meter as shown below :

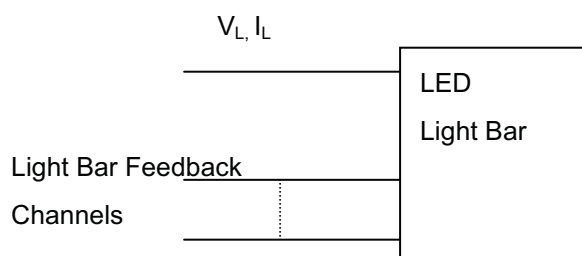

Note (2) For better LED light bar driving quality, it is recommended to utilize the adaptive boost converter with current balancing function to drive LED light-bar.

Note (3) $P_L = I_L \times V_L$ (Without LED converter transfer efficiency)


Note (4) The lifetime of LED is defined as the time when it continues to operate under the conditions at $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$ and $I_L = (21.2)\text{mA}$ (Per EA) until the brightness becomes $\leq 50\%$ of its original value.

4.4 DISPLAY PORT INPUT SIGNAL TIMING SPECIFICATIONS


4.4.1 DISPLAY PORT INTERFACE

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Differential Signal Common Mode Voltage(MainLink and AUX)	VCM	0		2	V	(1) (4)
AUX AC Coupling Capacitor	C_Aux_Source	75		200	nF	(2)
Main Link AC Coupling Capacitor	C_ML_Source	75		200	nF	(3)
DPCD Version (Address 00000h)	-	0x12h			-	(5)


Note (1) Display port interface related AC coupled signals should follow VESA DisplayPort Standard Version1. Revision 1a and VESA Embedded DisplayPort™ Standard Version 1.2. There are many optional items described in eDP1.2. If some optional item is requested, please contact us.

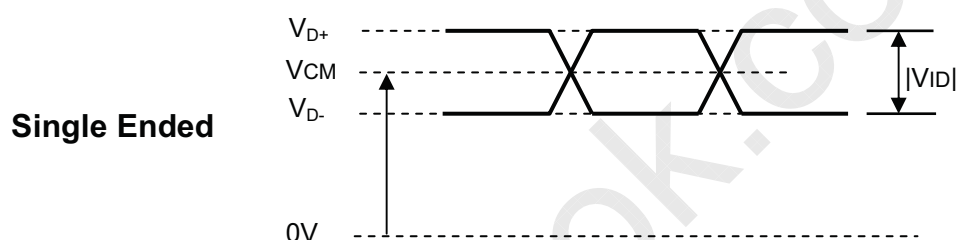

(2) Recommended eDP AUX Channel topology is as below and the AUX AC Coupling Capacitor (C_Aux_Source) should be placed on the source device.

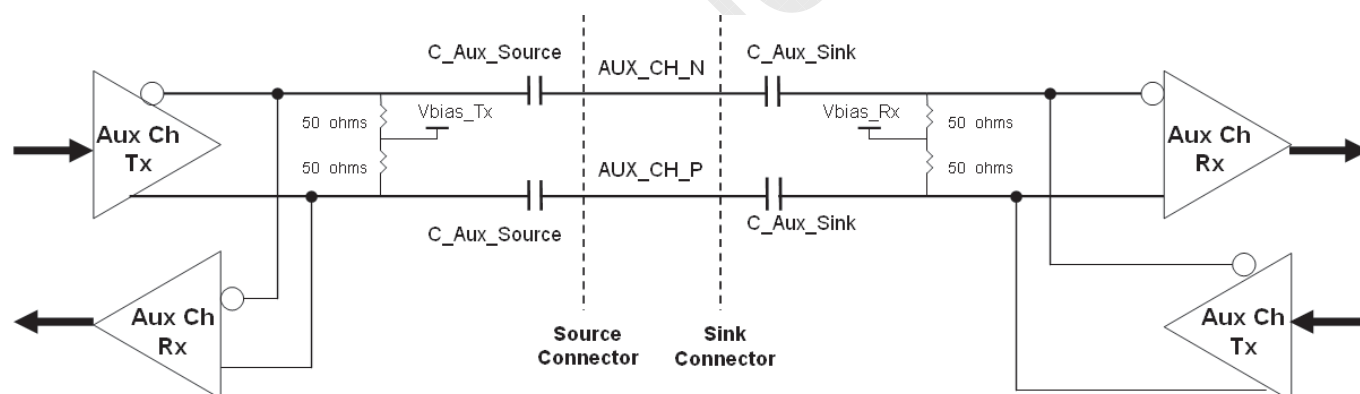

(3) Recommended Main Link Channel topology is as below and the Main Link AC Coupling Capacitor (C_ML_Source) should be placed on the source device.

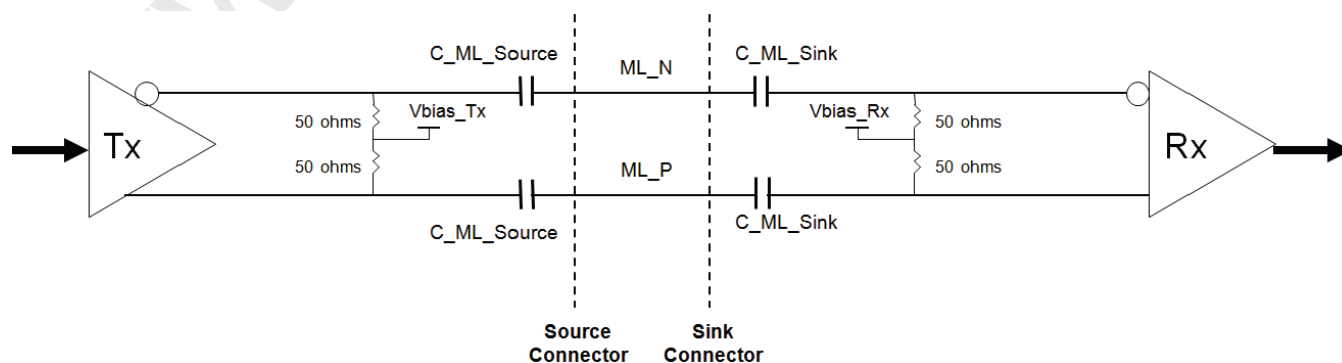

(4) The source device should pass the test criteria described in DisplayPortCompliance Test Specification



(CTS) 1.1

(5) The DPCD revision number is specified at DPCD address 00000h, and its detail definition is listed as the following table according to the above documents about DP and eDP.

DPCD Address 00000h	DPCD revision number
0X10h	DPCD Rev.1.0
0X11h	DPCD Rev.1.1
0X12h	DPCD Rev.1.2

4.5 DISPLAY TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.


Refresh rate 165Hz

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK	Frequency	1/Tc	696.18	699.68	703.18	MHz	-
DE	Vertical Total Time	TV	1555	1559	1563	TH	-
	Vertical Active Display Period	TVD	1440	1440	1440	TH	-
	Vertical Active Blanking Period	TVB	TV-TVD	119	TV-TVD	TH	-
	Horizontal Total Time	TH	2700	2720	2740	Tc	-
	Horizontal Active Display Period	THD	2560	2560	2560	Tc	-
	Horizontal Active Blanking Period	THB	TH-THD	160	TH-THD	Tc	-


Refresh rate 60Hz

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK	Frequency	1/Tc	253.16	254.43	255.7	MHz	-
DE	Vertical Total Time	TV	1555	1559	1563	TH	-
	Vertical Active Display Period	TVD	1440	1440	1440	TH	-
	Vertical Active Blanking Period	TVB	TV-TVD	119	TV-TVD	TH	-
	Horizontal Total Time	TH	2700	2720	2740	Tc	-
	Horizontal Active Display Period	THD	2560	2560	2560	Tc	-
	Horizontal Active Blanking Period	THB	TH-THD	160	TH-THD	Tc	-

INPUT SIGNAL TIMING DIAGRAM

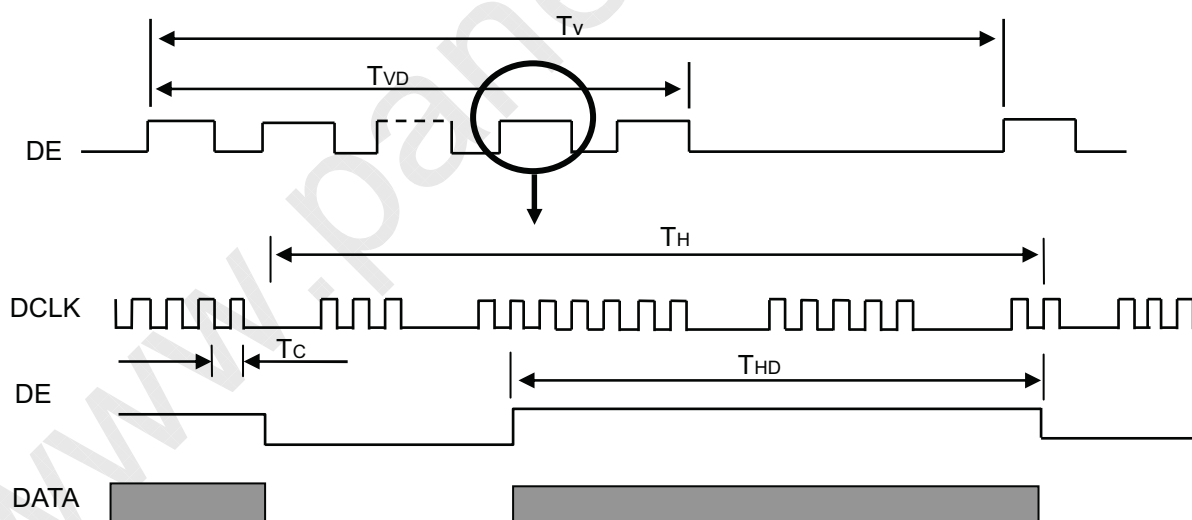

4.6 POWER ON/OFF SEQUENCE

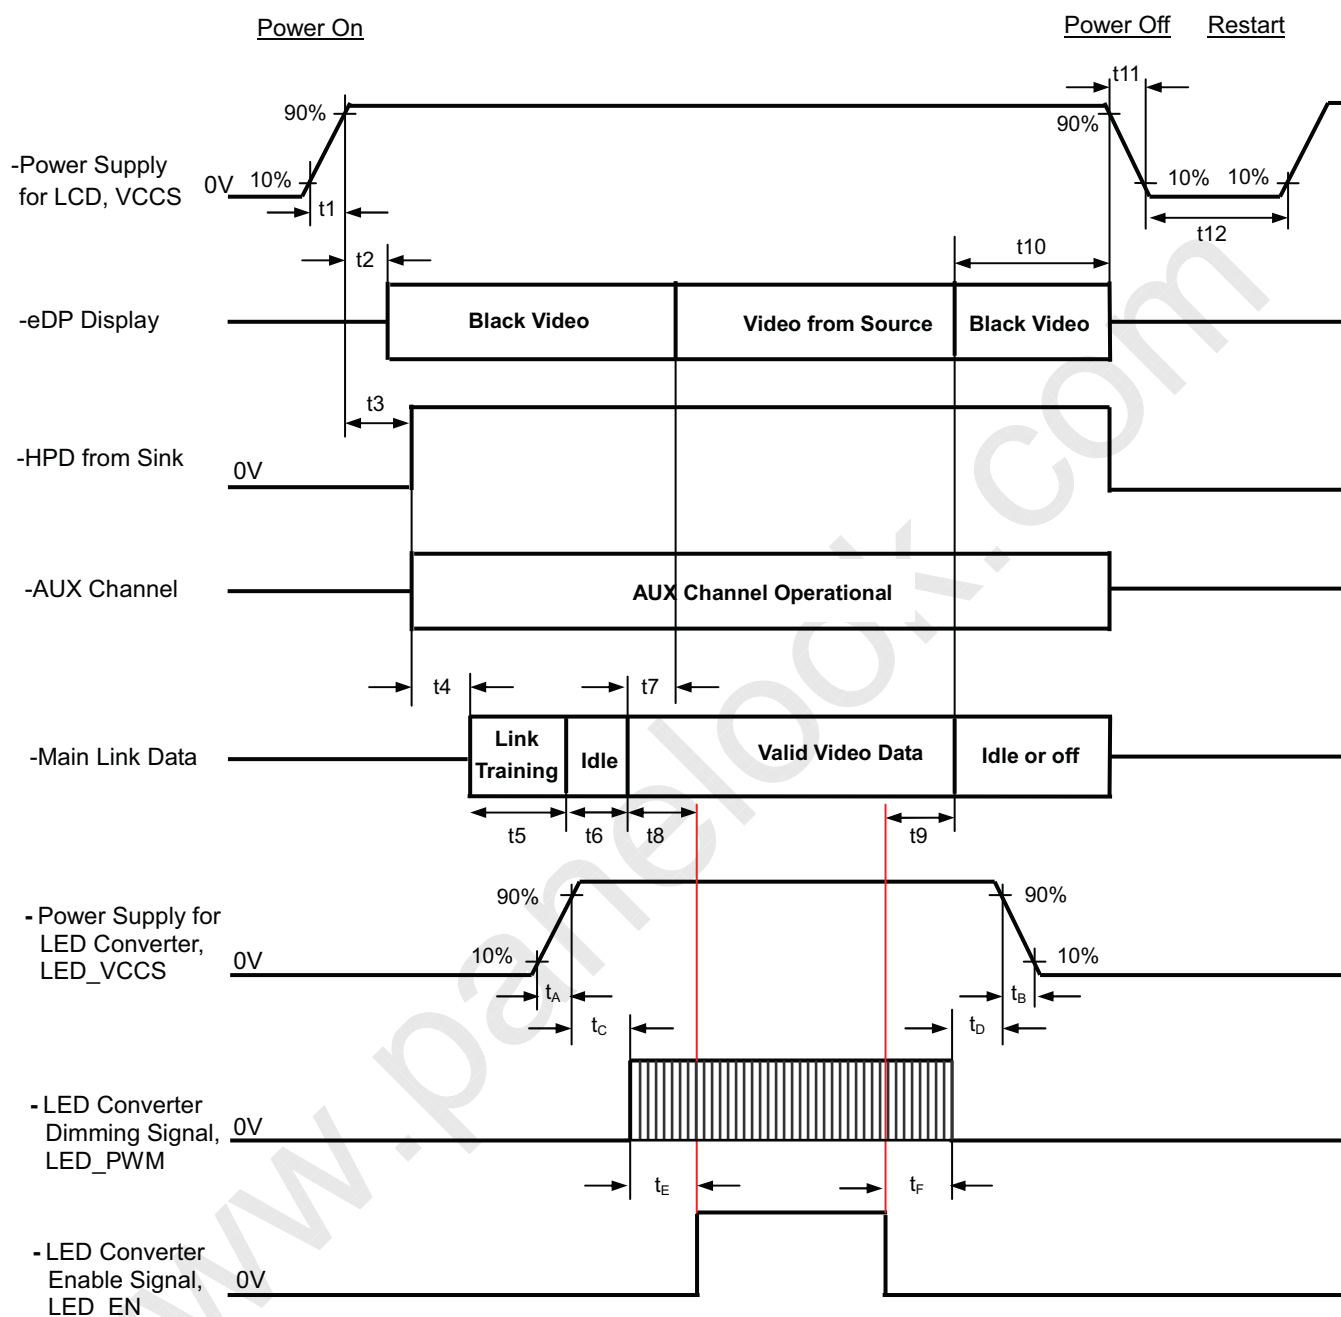

PRODUCT SPECIFICATION

Timing Specifications:

Parameter	Description	Reqd. By	Value		Unit	Notes
			Min	Max		
t1	Power rail rise time, 10% to 90%	Source	0.5	10	ms	-
t2	Delay from LCD,VCCS to black video generation	Sink	0	200	ms	Automatic Black Video generation prevents display noise until valid video data is received from the Source (see Notes:2 and 3 below)
t3	Delay from LCD,VCCS to HPD high	Sink	0	200	ms	Sink AUX Channel must be operational upon HPD high (see Note:4 below)
t4	Delay from HPD high to link training initialization	Source	0	-	ms	Allows for Source to read Link capability and initialize
t5	Link training duration	Source	0	-	ms	Dependant on Source link training protocol
t6	Link idle	Source	0	-	ms	Min Accounts for required BS-Idle pattern. Max allows for Source frame synchronization
t7	Delay from valid video data from Source to video on display	Sink	0	50	ms	Max value allows for Sink to validate video data and timing. At the end of T7, Sink will indicate the detection of valid video data by setting the SINK_STATUS bit to logic 1 (DPCD 00205h, bit 0), and Sink will no longer generate automatic Black Video
t8	Delay from valid video data from Source to backlight on	Source	80*	-	ms	Source must assure display video is stable*: Recommended by INX. To avoid garbage image.
t9	Delay from backlight off to end of valid video data	Source	50*	-	ms	Source must assure backlight is no longer illuminated. At the end of T9, Sink will indicate the detection of no valid video data by setting the SINK_STATUS bit to logic 0 (DPCD 00205h, bit 0), and Sink will automatically display Black Video. (See Notes: 2 and 3 below) *: Recommended by INX. To avoid garbage image.
t10	Delay from end of valid video data from Source to power off	Source	0	500	ms	Black video will be displayed after receiving idle or off signals from Source
t11	VCCS power rail fall time, 90% to 10%	Source	0.5	10	ms	-
t12	VCCS Power off time	Source	500	-	ms	-
t _A	LED power rail rise time, 10% to 90%	Source	0.5	10	ms	-
t _B	LED power rail fall time, 90% to 10%	Source	0	10	ms	-
t _C	Delay from LED power rising to LED dimming signal	Source	1	-	ms	-



PRODUCT SPECIFICATION

t_D	Delay from LED dimming signal to LED power falling	Source	1	-	ms	-
t_E	Delay from LED dimming signal to LED enable signal	Source	0	-	ms	-
t_F	Delay from LED enable signal to LED dimming signal	Source	0	-	ms	-

Note (1) Please don't plug or unplug the interface cable when system is turned on.

Note (2) The Sink must include the ability to automatically generate Black Video autonomously. The Sink must automatically enable Black Video under the following conditions:

- Upon LCDVCC power-on (within T2 max)
- When the "NoVideoStream_Flag" (VB-ID Bit 3) is received from the Source (at the end of T9)

Note (3) The Sink may implement the ability to disable the automatic Black Video function, as described in Note (2), above, for system development and debugging purposes.

Note (4) The Sink must support AUX Channel polling by the Source immediately following LCDVCC power-on without causing damage to the Sink device (the Source can re-try if the Sink is not ready). The Sink must be able to response to an AUX Channel transaction with the time specified within T3 max.

5. OPTICAL CHARACTERISTICS

5.1 TEST CONDITIONS


Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V _{CC}	3.3	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
LED Light Bar Input Current	I _L	127.2	mA

The measurement methods of optical characteristics are shown in Section 5.2. The following items should be measured under the test conditions described in Section 5.1 and stable environment shown in Note (5).

5.2 OPTICAL SPECIFICATIONS

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	$\theta_x=0^\circ, \theta_Y=0^\circ$ Viewing Normal Angle $\theta_x=0^\circ, \theta_Y=0^\circ$ Viewing Normal Angle	800	1000	-	-	(2), (5),(7)
Response Time		T _R		-	5	10	ms	(3),(7)
		T _F		-	4	9	ms	
		G2G w/i OD			3	(5)	ms	
		G2G w/o DO			7	(9)		
Average Luminance of White		L _{Ave}		255	300	-	cd/m ²	(4), (6),(7)
Color Chromaticity	Red	R _x		Typ – 0.03	0.680 0.320 0.265 0.690 0.150 0.060 0.313 0.329	Typ + 0.03	-	(1),(7)
		R _y					-	
	Green	G _x					-	
		G _y					-	
	Blue	B _x					-	
		B _y					-	
	White	W _x					-	
		W _y					-	
DCI-P3		CG	96	100	-	%	(5),(7),(8)	
Cross talk		CT	-	-	2	%	(5),(7),(9)	
Viewing Angle	Horizontal	θ _x +	CR≥10	80	89	-	Deg.	(1),(5), (7)
		θ _x -		80	89	-		
	Vertical	θ _y +		80	89	-		
		θ _y -		80	89	-		
White Variation of 5 Points		δW _{5p}	$\theta_x=0^\circ, \theta_Y=0^\circ$	-	-	1.25	-	(5),(6), (7)
White Variation of 13 Points		δW _{13p}	$\theta_x=0^\circ, \theta_Y=0^\circ$			1.5		(5),(6), (7)

Note (1) Definition of Viewing Angle (θ_x , θ_y):

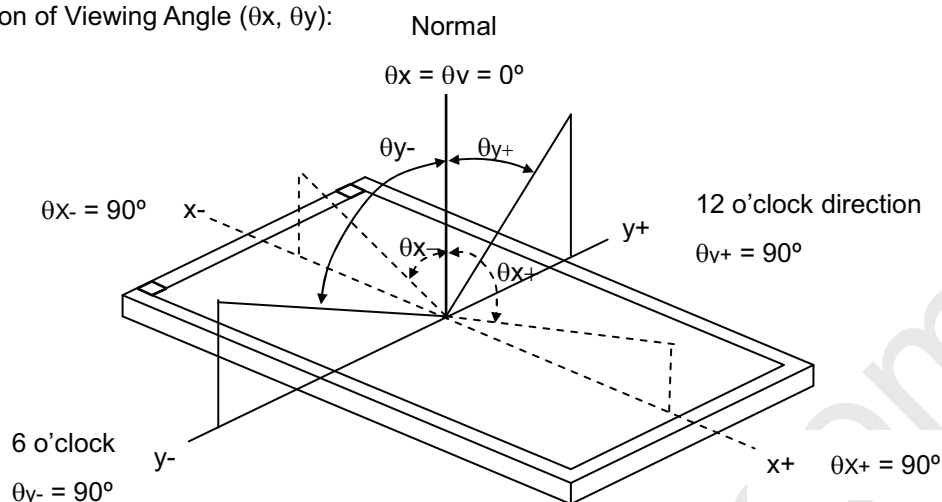

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$


L255: Luminance of gray level 255

L 0: Luminance of gray level 0

$$CR = CR(1)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R , T_F , G2G):

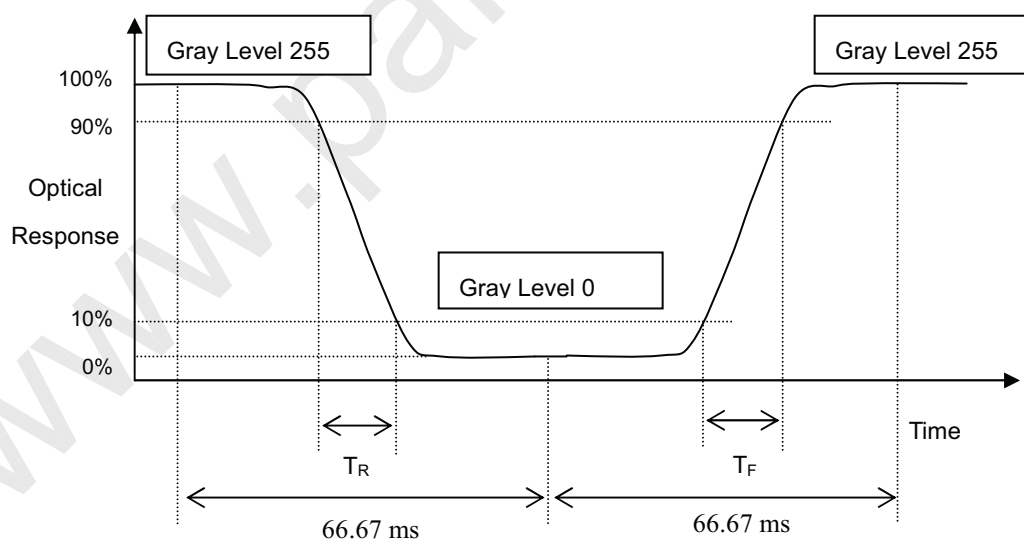



PRODUCT SPECIFICATION

Gray to Gray		To								
		0	32	64	96	128	159	191	223	255
From	0									
	32									
	64									
	96									
	128									
	159									
	191									
	223									
	255									

G2G=Average time in 9x9 matrix

The reference gray level are 0,32,64,96,128,159,191,223,255

Note (4) Definition of Average Luminance of White (L_{AVE}):


Measure the luminance of White at 5 points

$$L_{AVE} = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$$

L(x) is corresponding to the luminance of the point X at Figure in Note (6)

Note (5) Measurement Setup:

The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

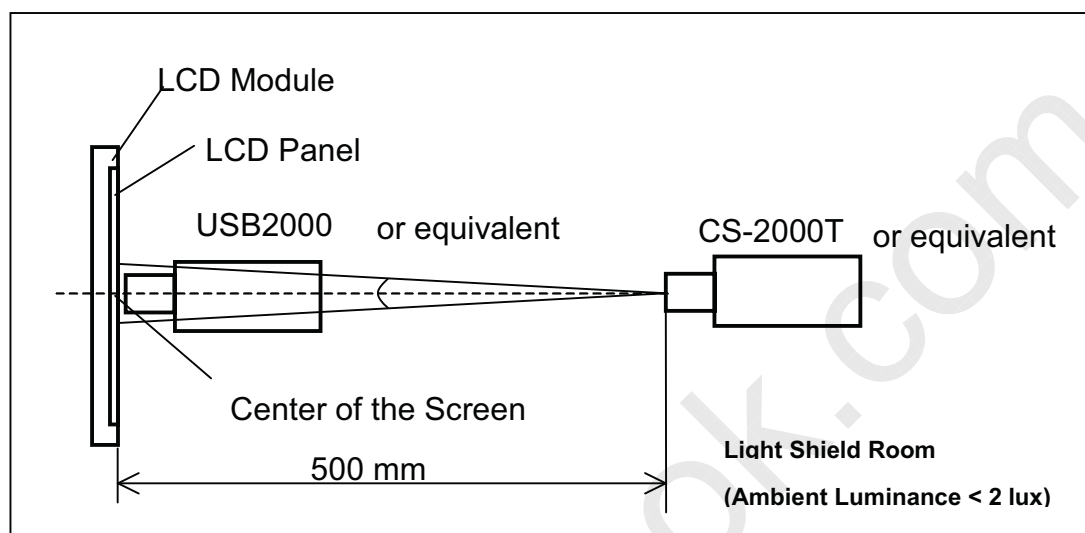


Note (6) Definition of White Variation (δW):

Measure the luminance of White at 5 points

$$\delta W_{5p} = \{ \text{Maximum } [L(1) \sim L(5)] / \text{Minimum } [L(1) \sim L(5)] \} * 100\%$$

$$\delta W_{13p} = \{ \text{Maximum } [L(1) \sim L(13)] / \text{Minimum } [L(1) \sim L(13)] \} * 100\%$$

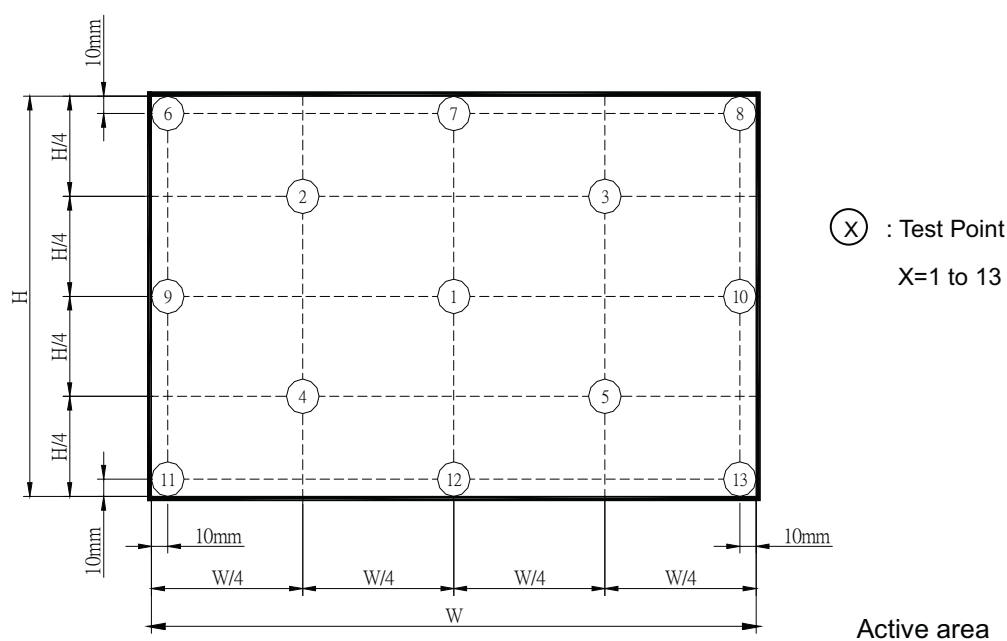

Note (7) The listed optical specifications refer to the initial value of manufacture, but the condition of the specifications after long-term operation will not be warranted.

Note (8) Definition of color gamut (C.G%):


$$C.G\% = \text{Area}(R, G, B) / \text{Area}(R_0, G_0, B_0) \times 100\%$$

R_0, G_0, B_0 : CIE1931 coordinates of red, green, and blue defined by DCI-P3.

R, G, B : CIE1931 coordinates of red, green, and blue in module at 255 gray level.

$\text{Area}(R_0, G_0, B_0)$: Area of the triangle defined by coordinate R_0, G_0, B_0 .

$\text{Area}(R, G, B)$: Area of the triangle defined by coordinate R, G, B . And just take the part that inside the $\text{Area}(R_0, G_0, B_0)$, ignoring extension area.

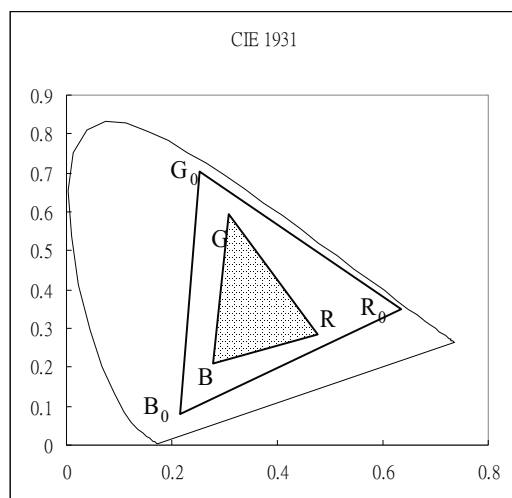



Note (9) Cross Talk (CT):

$$CT = |Y_B - Y_A| / Y_A \times 100\%$$

Where

Y_A = Luminance of measured location in left figure

Y_B = Luminance of measured location in right figure

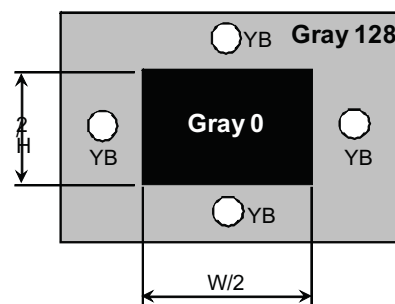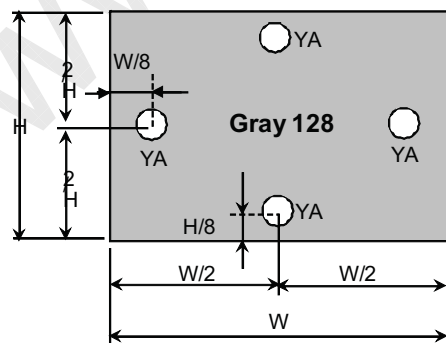



6. RELIABILITY TEST ITEM

Test Item	Test Condition	Note
High Temperature Storage Test	60°C, 240 hours	(1) (2)
Low Temperature Storage Test	-20°C, 240 hours	
Thermal Shock Storage Test	-20°C, 0.5hour $\longleftrightarrow$ 60°C, 0.5hour; 100cycles, 1hour/cycle	
High Temperature Operation Test	50°C, 240 hours	
Low Temperature Operation Test	0°C, 240 hours	
High Temperature & High Humidity Operation Test	50°C, 80% RH, 240 hours	
High Temperature & High Humidity Storage Test	40°C, 90% RH, 240 hours	(1) (3)
ESD Test (Operation)	150pF, 330 Ω , 1sec/cycle Condition 1 : Contact Discharge, $\pm 8KV$ Condition 2 : Air Discharge, $\pm 15KV$	
Shock (Non-Operating)	220G, 2ms, half sine wave, 1 time for each direction of $\pm X, \pm Y, \pm Z$	
Vibration (Non-Operating)	1.5G / 10-500 Hz, Sine wave, 30 min/cycle, 1cycle for each X, Y, Z	

Note (1) criteria : Normal display image with no obvious non-uniformity and no line defect.

Note (2) Evaluation should be tested after storage at room temperature for more than two hour

Note (3) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

7. PACKING

7.1 MODULE LABEL


The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.



(a) Model Name: N156KME -GNA

(b) Revision: Rev. XX, for example: C1, C2 ...etc.

(c) Serial ID: XXXXXXYMDLNNNN

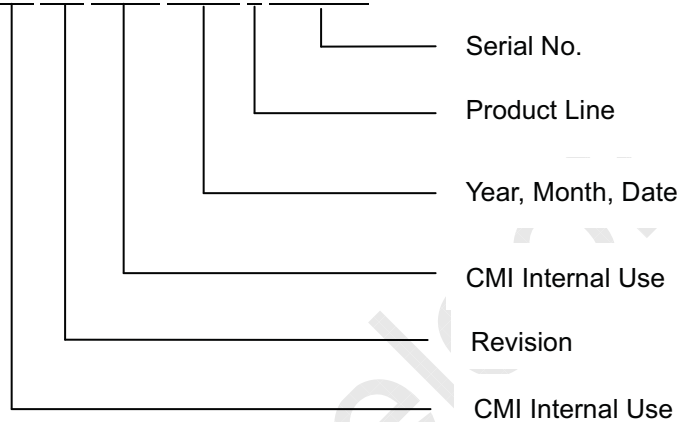

(d) Production Location: MADE IN XXXX.

(e) UL/CB logo: XXXX is UL factory ID.

Serial ID includes the information as below:

(a) Manufactured Date: Year: 0~9, for 2010~2019

Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1st to 31st, exclude I, O and U

(b) Revision Code: cover all the change

(c) Serial No.: Manufacturing sequence of product

(d) Product Line: 1 -> Line1, 2 -> Line 2, ...etc.

7.2 CARTON

- (1) Box Dimensions : 500(L)*370(W)*270(H)
 (2) 24 modules/Carton

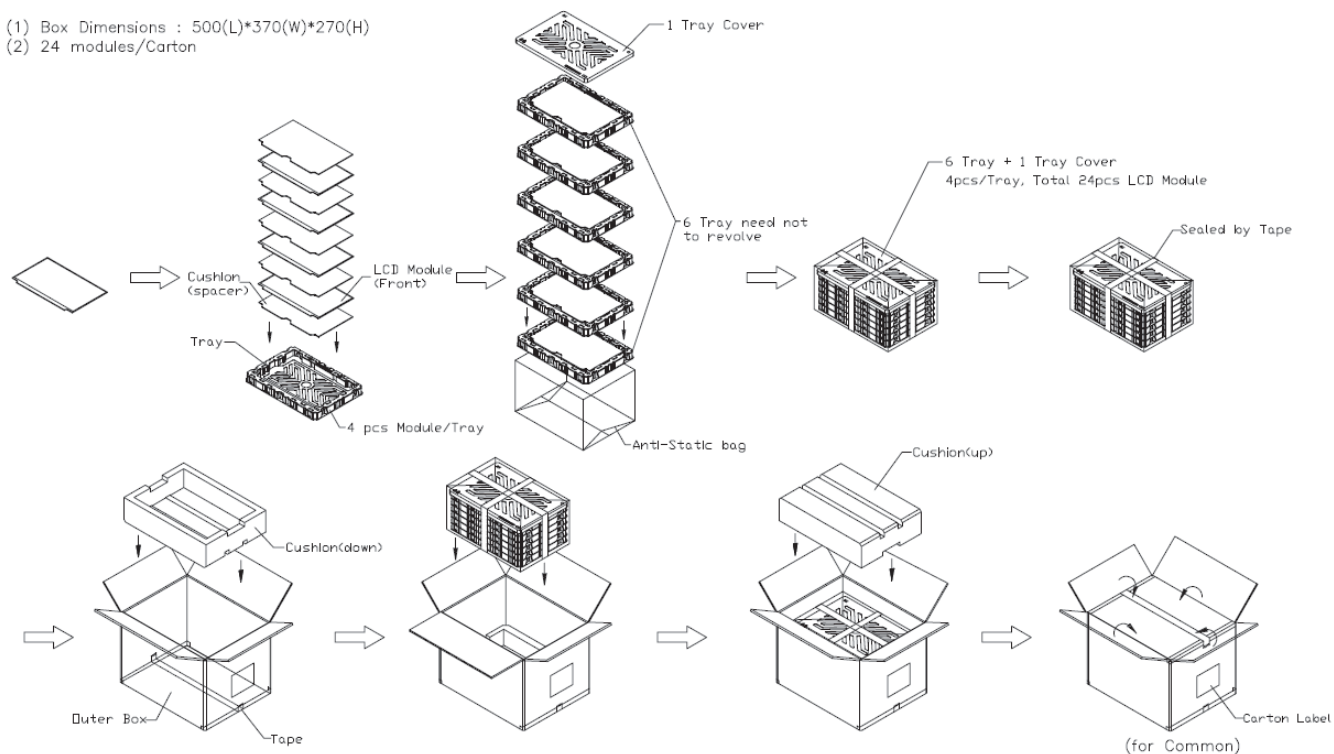


Figure. 7-2 Packing method

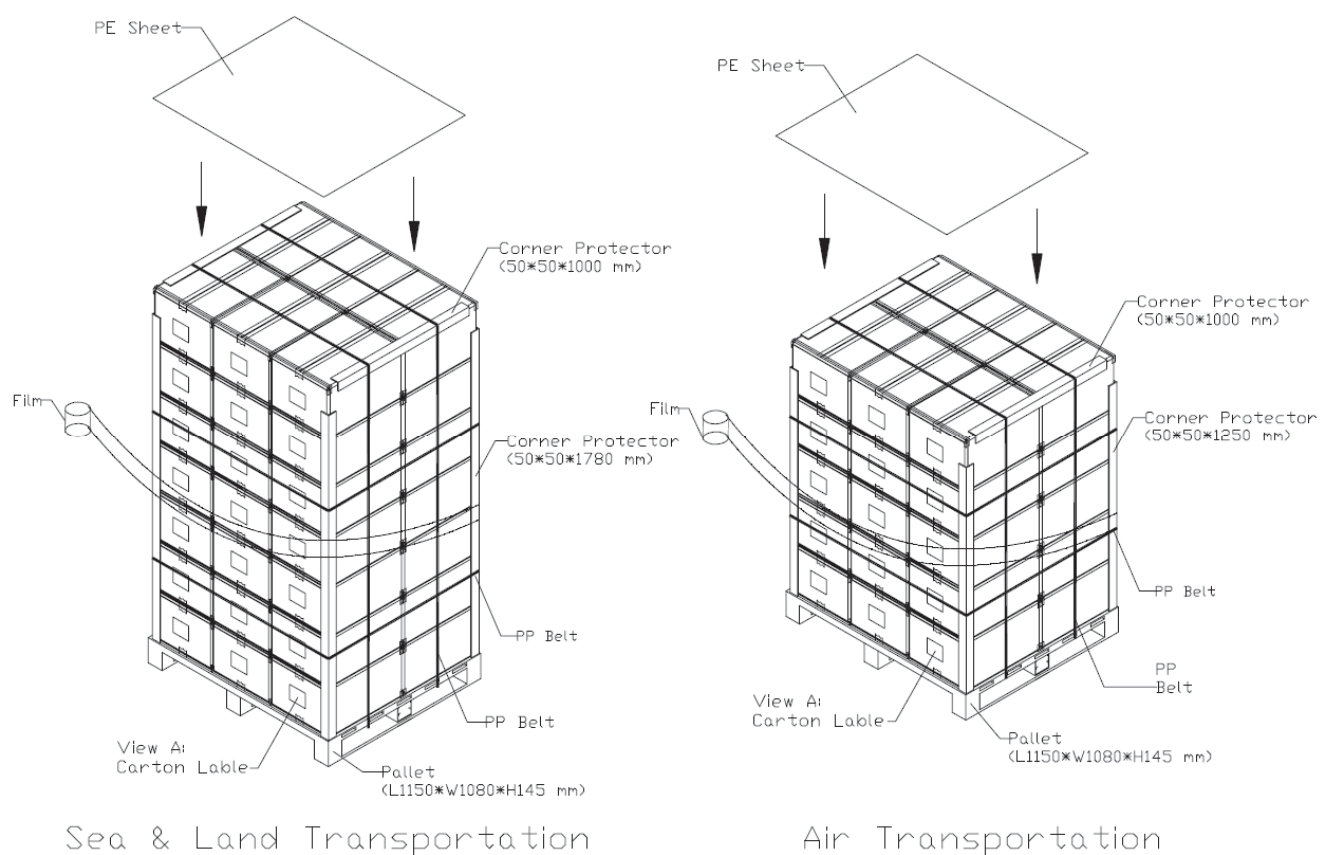
7.3 PALLET

Figure. 7-3 Packing method

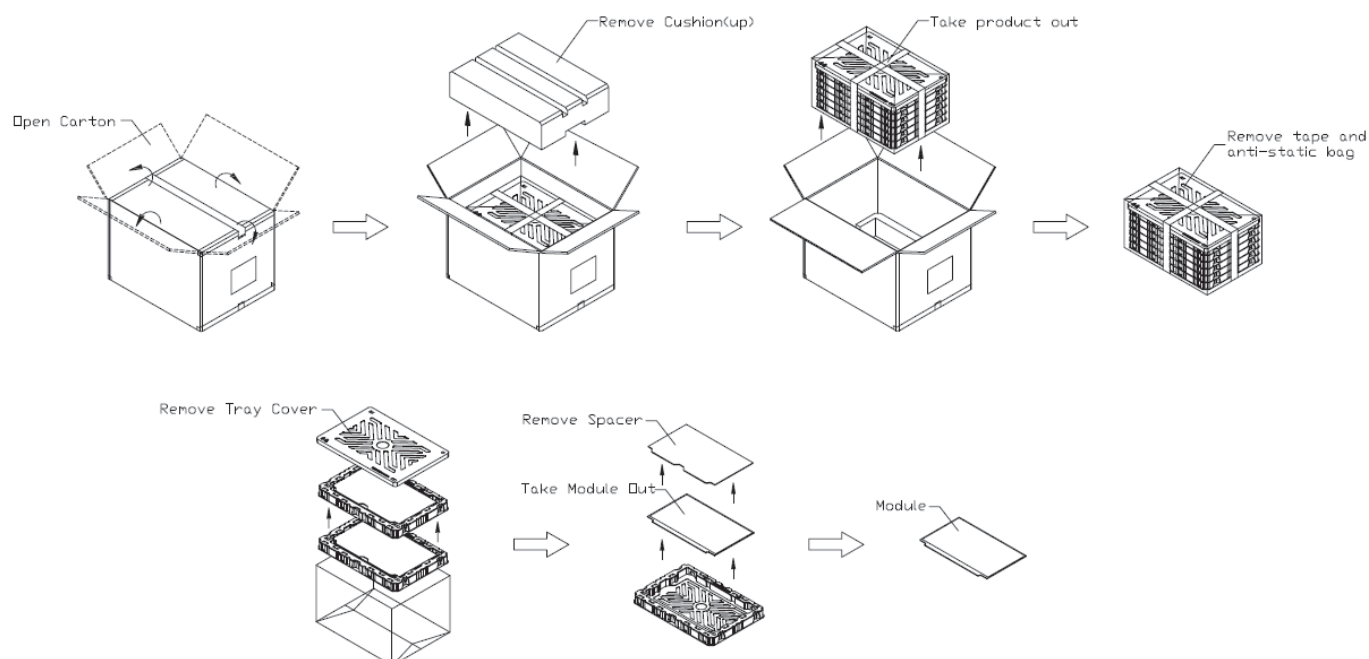
7.4 UN-PACKAGING METHOD

Figure. 7-4 Un-packing method



8. PRECAUTIONS

8.1 HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the LED wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.

8.2 STORAGE PRECAUTIONS

- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of LED will be higher than the room temperature.

8.3 OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMIS LSI chips from damage during latch-up.
- (3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while assembling with converter. Do not disassemble the module or insert anything into the Backlight unit.



Appendix. EDID DATA STRUCTURE (TBD)

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the VESA Plug & Display and FPD/ standards.

Byte # (decimal)	Byte # (hex)	Field Name and Comments	Value (hex)	Value (binary)
0	00	Header	00	00000000
1	01	Header	FF	11111111
2	02	Header	FF	11111111
3	03	Header	FF	11111111
4	04	Header	FF	11111111
5	05	Header	FF	11111111
6	06	Header	FF	11111111
7	07	Header	00	00000000
8	08	EISA ID manufacturer name ("CMN")	0D	00001101
9	09	EISA ID manufacturer name	AE	10101110
10	0A	ID product code (LSB)	2A	00101010
11	0B	ID product code (MSB)	15	00010101
12	0C	ID S/N (fixed "0")	00	00000000
13	0D	ID S/N (fixed "0")	00	00000000
14	0E	ID S/N (fixed "0")	00	00000000
15	0F	ID S/N (fixed "0")	00	00000000
16	10	Week of manufacture ("16")	10	00010000
17	11	Year of manufacture ("2020")	1E	00011110
18	12	EDID structure version ("1")	01	00000001
19	13	EDID revision ("4")	04	00000100
20	14	Video I/P definition ("Digital")	A5	10100101
21	15	Active area horizontal ("34.422cm")	22	00100010
22	16	Active area vertical ("19.362cm")	13	00010011
23	17	Display Gamma (Gamma = "2.2")	78	01111000
24	18	Feature support ("RGB, Continuous")	03	00000011
25	19	Rx1, Rx0, Ry1, Ry0, Gx1, Gx0, Gy1, Gy0	0F	00001111
26	1A	Bx1, Bx0, By1, By0, Wx1, Wx0, Wy1, Wy0	95	10010101
27	1B	Rx=0.68	AE	10101110
28	1C	Ry=0.32	52	01010010
29	1D	Gx=0.265	43	01000011
30	1E	Gy=0.69	B0	10110000
31	1F	Bx=0.15	26	00100110
32	20	By=0.06	0F	00001111
33	21	Wx=0.313	50	01010000
34	22	Wy=0.329	54	01010100
35	23	Established timings 1	00	00000000
36	24	Established timings 2	00	00000000
37	25	Manufacturer's reserved timings	00	00000000
38	26	Standard timing ID # 1	01	00000001
39	27	Standard timing ID # 1	01	00000001
40	28	Standard timing ID # 2	01	00000001
41	29	Standard timing ID # 2	01	00000001



PRODUCT SPECIFICATION

42	2A	Standard timing ID # 3	01	00000001
43	2B	Standard timing ID # 3	01	00000001
44	2C	Standard timing ID # 4	01	00000001
45	2D	Standard timing ID # 4	01	00000001
46	2E	Standard timing ID # 5	01	00000001
47	2F	Standard timing ID # 5	01	00000001
48	30	Standard timing ID # 6	01	00000001
49	31	Standard timing ID # 6	01	00000001
50	32	Standard timing ID # 7	01	00000001
51	33	Standard timing ID # 7	01	00000001
52	34	Standard timing ID # 8	01	00000001
53	35	Standard timing ID # 8	01	00000001
54	36	Detailed timing description # 1 Pixel clock ("254.43"MHz, According to VESA CVT Rev1.4)	63	01100011
55	37	# 1 Pixel clock (hex LSB first)	63	01100011
56	38	# 1 H active ("2560")	00	00000000
57	39	# 1 H blank ("160")	A0	10100000
58	3A	# 1 H active : H blank ("2560 : 160")	A0	10100000
59	3B	# 1 V active ("1440")	A0	10100000
60	3C	# 1 V blank ("119")	77	01110111
61	3D	# 1 V active : V blank ("1440 : 119")	50	01010000
62	3E	# 1 H sync offset ("48")	30	00110000
63	3F	# 1 H sync pulse width ("32")	20	00100000
64	40	# 1 V sync offset : V sync pulse width ("6 : 10")	6A	01101010
65	41	# 1 H sync offset : H sync pulse width : V sync offset : V sync width ("48 : 32 : 6 : 10")	00	00000000
66	42	# 1 H image size ("344 mm")	58	01011000
67	43	# 1 V image size ("193 mm")	C1	11000001
68	44	# 1 H image size : V image size	10	00010000
69	45	# 1 H boarder ("0")	00	00000000
70	46	# 1 V boarder ("0")	00	00000000
71	47	Non-interlaced, Normal Display, Digital separate, Negative Hsync, Negative Vsync	18	00011000
72	48	Indicates that this 18 byte descriptor is a Display Descriptor	00	00000000
73	49	Indicates that this 18 byte descriptor is a Display Descriptor	00	00000000
74	4A	Set to 00h when 18 byte descriptor is used as a Display Descriptor	00	00000000
75	4B	Tag Number for Display Range Limits Descriptor	FD	11111101
76	4C	Display Range Limits Offset : FLAGs	0C	00001100
77	4D	Minimum Vertical Rate	30	00110000
78	4E	Maximum Vertical Rate	A5	10100101
79	4F	Minimum Horizontal Rate	02	00000010
80	50	Maximum Horizontal Rate	02	00000010
81	51	Maximum Pixel Clock	46	01000110
82	52	Video Timing Support Flags : Bytes 10 --> 17 indicate support for additional video timings	01	00000001
83	53	Line Feed (0Ah if Byte 10 = 00h or 01h) or Video Timing Data (00h-->FFh If Byte 10 = 02h or 04h)	0A	00001010
84	54	Space (20h if Byte 10 = 00h or 01h) or Video Timing Data (00h-->FFh If Byte 10 = 02h or 04h)	20	00100000



PRODUCT SPECIFICATION

85	55	Space (20h if Byte 10 = 00h or 01h) or Video Timing Data (00h-->FFh If Byte 10 = 02h or 05h)	20	00100000
86	56	Space (20h if Byte 10 = 00h or 01h) or Video Timing Data (00h-->FFh If Byte 10 = 02h or 06h)	20	00100000
87	57	Space (20h if Byte 10 = 00h or 01h) or Video Timing Data (00h-->FFh If Byte 10 = 02h or 07h)	20	00100000
88	58	Space (20h if Byte 10 = 00h or 01h) or Video Timing Data (00h-->FFh If Byte 10 = 02h or 08h)	20	00100000
89	59	Space (20h if Byte 10 = 00h or 01h) or Video Timing Data (00h-->FFh If Byte 10 = 02h or 09h)	20	00100000
90	5A	Detailed timing description # 3	00	00000000
91	5B	# 3 Flag	00	00000000
92	5C	# 3 Reserved	00	00000000
93	5D	# 3 ASCII string Vendor	FE	11111110
94	5E	# 3 Flag	00	00000000
95	5F	# 3 Character of string ("C")	43	01000011
96	60	# 3 Character of string ("M")	4D	01001101
97	61	# 3 Character of string ("N")	4E	01001110
98	62	# 3 New line character indicates end of ASCII string	0A	00001010
99	63	# 3 Padding with "Blank" character	20	00100000
100	64	# 3 Padding with "Blank" character	20	00100000
101	65	# 3 Padding with "Blank" character	20	00100000
102	66	# 3 Padding with "Blank" character	20	00100000
103	67	# 3 Padding with "Blank" character	20	00100000
104	68	# 3 Padding with "Blank" character	20	00100000
105	69	# 3 Padding with "Blank" character	20	00100000
106	6A	# 3 Padding with "Blank" character	20	00100000
107	6B	# 3 Padding with "Blank" character	20	00100000
108	6C	Detailed timing description # 4	00	00000000
109	6D	# 4 Flag	00	00000000
110	6E	# 4 Reserved	00	00000000
111	6F	# 4 ASCII string Model Name	FE	11111110
112	70	# 4 Flag	00	00000000
113	71	# 4 Character of Model name ("N")	4E	01001110
114	72	# 4 Character of Model name ("1")	31	00110001
115	73	# 4 Character of Model name ("5")	35	00110101
116	74	# 4 Character of Model name ("6")	36	00110110
117	75	# 4 Character of Model name ("K")	4B	01001011
118	76	# 4 Character of Model name ("M")	4D	01001101
119	77	# 4 Character of Model name ("E")	45	01000101
120	78	# 4 Character of Model name ("-")	2D	00101101
121	79	# 4 Character of Model name ("G")	47	01000111
122	7A	# 4 Character of Model name ("N")	4E	01001110
123	7B	# 4 Character of Model name ("A")	41	01000001
124	7C	# 4 New line character indicates end of ASCII string	0A	00001010
125	7D	# 4 Padding with "Blank" character	20	00100000
126	7E	Extension flag	01	00000001
127	7F	Checksum	B0	10110000



PRODUCT SPECIFICATION

128	80	DisplayID EDID extension block tag	70	01110000
129	81	DisplayID version revision	13	00010011
130	82	section size	79	01111001
131	83	product type identifier	00	00000000
132	84	extension count	00	00000000
133	85	data block tag = type 1 timing detailed	03	00000011
134	86	block revision = 01	01	00000001
135	87	Number of payload bytes in block = (N x 20), 1<=N<=12	14	00010100
136	88	Pixel Clk/10,000 [low bit]	50	01010000
137	89	Pixel Clk/10,000 [middle bit]	11	00010001
138	8A	Pixel Clk/10,000 [high bit]	01	00000001
139	8B	timing option [prefered "detaild" timing, No streeo, 16:9']	84	10000100
140	8C	Horizontal Active [low bit]	FF	11111111
141	8D	Horizontal Active [high bit]	09	00001001
142	8E	Horizontal blank [low bit]	9F	10011111
143	8F	Horizontal blank [high bit]	00	00000000
144	90	Horizontal offset (front porch) [low bit]	2F	00101111
145	91	Horizontal offset (front porch) [high bit] / Horizontal sync polarity = Positive	00	00000000
146	92	Horizontal Sync width [low bit]	1F	00011111
147	93	Horizontal Sync width [high bit]	00	00000000
148	94	Vertical Active [low bit]	9F	10011111
149	95	Vertical Active [high bit]	05	00000101
150	96	Vertical blank [low bit]	76	01110110
151	97	Vertical blank [high bit]	00	00000000
152	98	Vertical offset (front porch) [low bit]	05	00000101
153	99	Vertical offset (front porch) [high bit] / Vertical sync polarity = Negative	00	00000000
154	9A	Vertical Sync width [low bit]	09	00001001
155	9B	Vertical Sync width [high bit]	00	00000000
156	9C	Reserved	00	00000000
157	9D	Reserved	00	00000000
158	9E	Reserved	00	00000000
159	9F	Reserved	00	00000000
160	A0	Reserved	00	00000000
161	A1	Reserved	00	00000000
162	A2	Reserved	00	00000000
163	A3	Reserved	00	00000000
164	A4	Reserved	00	00000000
165	A5	Reserved	00	00000000
166	A6	Reserved	00	00000000
167	A7	Reserved	00	00000000
168	A8	Reserved	00	00000000
169	A9	Reserved	00	00000000
170	AA	Reserved	00	00000000
171	AB	Reserved	00	00000000
172	AC	Reserved	00	00000000




PRODUCT SPECIFICATION

173	AD	Reserved	00	00000000
174	AE	Reserved	00	00000000
175	AF	Reserved	00	00000000
176	B0	Reserved	00	00000000
177	B1	Reserved	00	00000000
178	B2	Reserved	00	00000000
179	B3	Reserved	00	00000000
180	B4	Reserved	00	00000000
181	B5	Reserved	00	00000000
182	B6	Reserved	00	00000000
183	B7	Reserved	00	00000000
184	B8	Reserved	00	00000000
185	B9	Reserved	00	00000000
186	BA	Reserved	00	00000000
187	BB	Reserved	00	00000000
188	BC	Reserved	00	00000000
189	BD	Reserved	00	00000000
190	BE	Reserved	00	00000000
191	BF	Reserved	00	00000000
192	C0	Reserved	00	00000000
193	C1	Reserved	00	00000000
194	C2	Reserved	00	00000000
195	C3	Reserved	00	00000000
196	C4	Reserved	00	00000000
197	C5	Reserved	00	00000000
198	C6	Reserved	00	00000000
199	C7	Reserved	00	00000000
200	C8	Reserved	00	00000000
201	C9	Reserved	00	00000000
202	CA	Reserved	00	00000000
203	CB	Reserved	00	00000000
204	CC	Reserved	00	00000000
205	CD	Reserved	00	00000000
206	CE	Reserved	00	00000000
207	CF	Reserved	00	00000000
208	D0	Reserved	00	00000000
209	D1	Reserved	00	00000000
210	D2	Reserved	00	00000000
211	D3	Reserved	00	00000000
212	D4	Reserved	00	00000000
213	D5	Reserved	00	00000000
214	D6	Reserved	00	00000000
215	D7	Reserved	00	00000000
216	D8	Reserved	00	00000000
217	D9	Reserved	00	00000000
218	DA	Reserved	00	00000000
219	DB	Reserved	00	00000000




PRODUCT SPECIFICATION

220	DC	Reserved	00	00000000
221	DD	Reserved	00	00000000
222	DE	Reserved	00	00000000
223	DF	Reserved	00	00000000
224	E0	Manufacturer's S/N	00	00000000
225	E1	Manufacturer's S/N	00	00000000
226	E2	Manufacturer's S/N	00	00000000
227	E3	Manufacturer's S/N	00	00000000
228	E4	Manufacturer's S/N	00	00000000
229	E5	Manufacturer's S/N	00	00000000
230	E6	Manufacturer's S/N	00	00000000
231	E7	Manufacturer's S/N	00	00000000
232	E8	Manufacturer's S/N	00	00000000
233	E9	Manufacturer's S/N	00	00000000
234	EA	Manufacturer's S/N	00	00000000
235	EB	Manufacturer's S/N	00	00000000
236	EC	Manufacturer's S/N	00	00000000
237	ED	Manufacturer's S/N	00	00000000
238	EE	Manufacturer's S/N	00	00000000
239	EF	Manufacturer's S/N	00	00000000
240	F0	Reserved	00	00000000
241	F1	Reserved	00	00000000
242	F2	Reserved	00	00000000
243	F3	Reserved	00	00000000
244	F4	Reserved	00	00000000
245	F5	Reserved	00	00000000
246	F6	Reserved	00	00000000
247	F7	Reserved	00	00000000
248	F8	Reserved	00	00000000
249	F9	Reserved	00	00000000
250	FA	Reserved	00	00000000
251	FB	Reserved	00	00000000
252	FC	Reserved	00	00000000
253	FD	Reserved	00	00000000
254	FE	Checksum	59	01011001
255	FF	Checksum	90	10010000

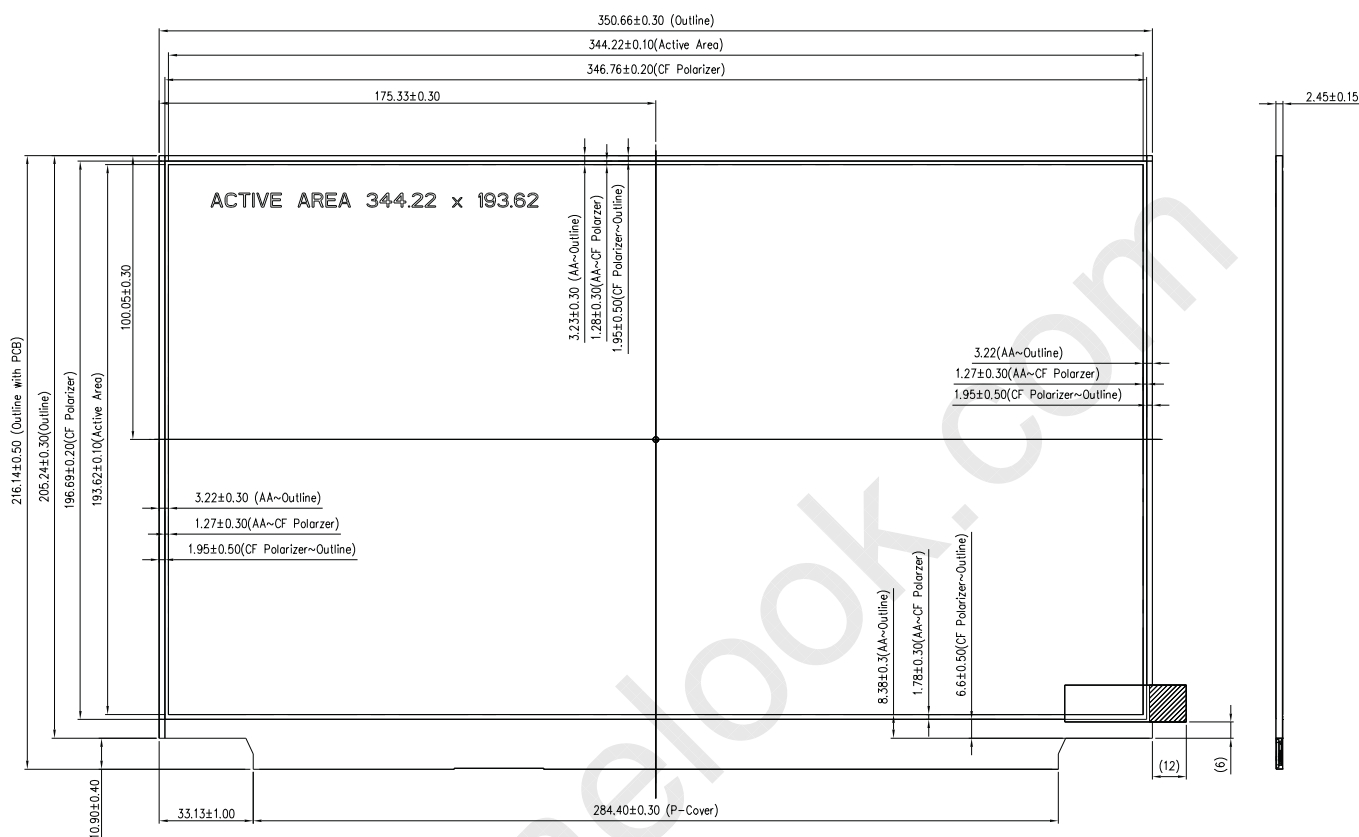Appendix. OUTLINE DRAWING



PRODUCT SPECIFICATION



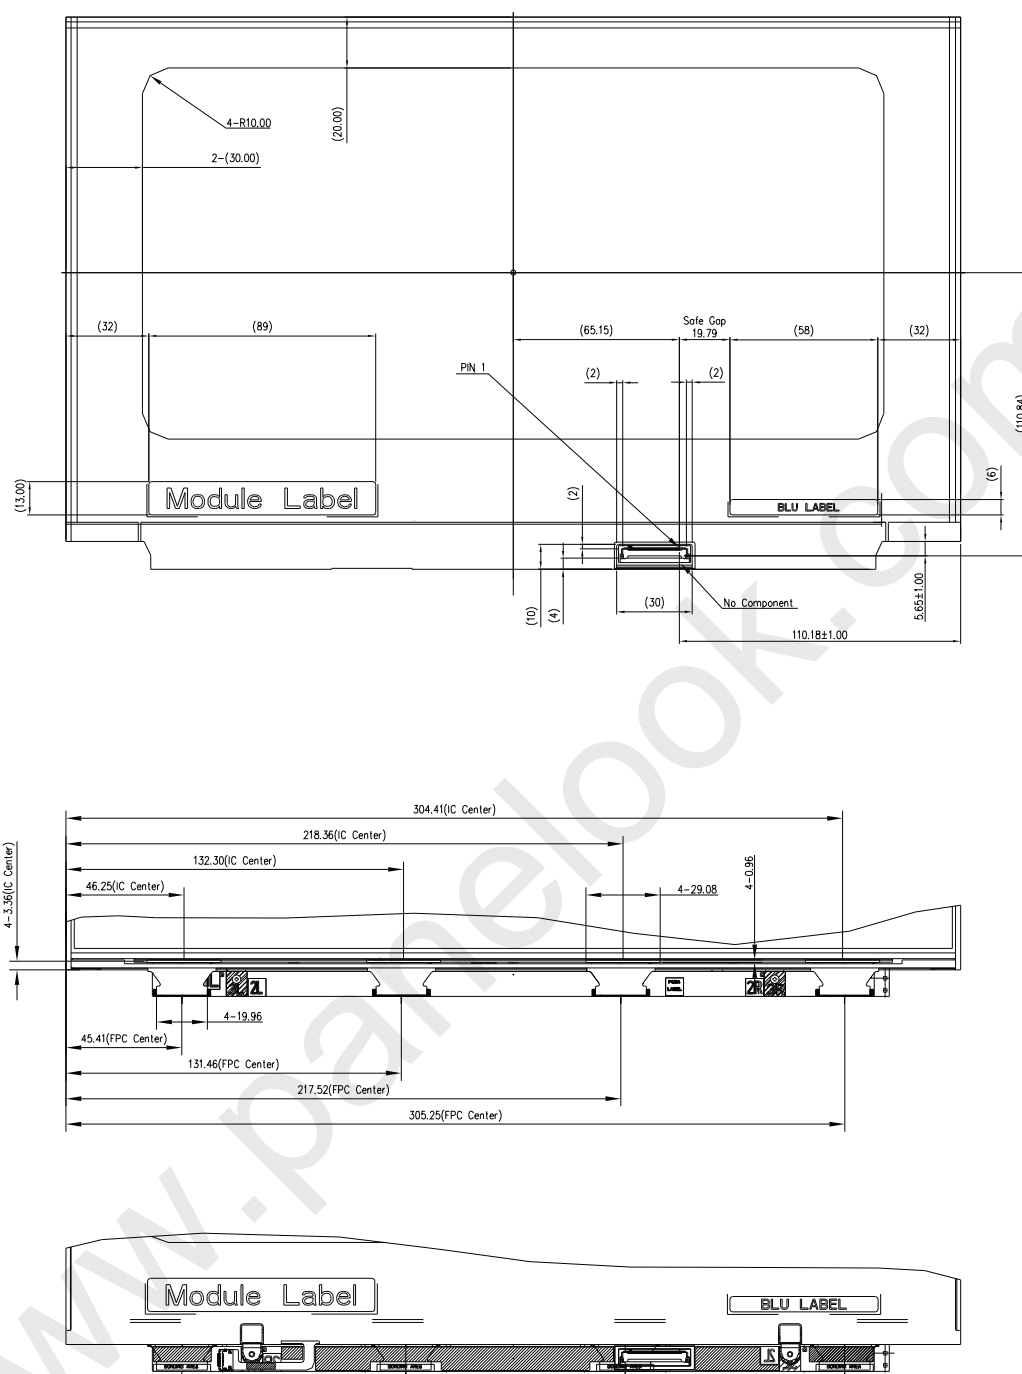





NOTES :

1. IN ORDER TO AVOID ABNORMAL DISPLAY, POOLING AND WHITE SPOT, NO OVERLAPPING IS SUGGESTED AT CABLES, ANTENNAS, CAMERA, WLAN, WAN OR FOREIGN OBJECTS OVER FPC/COF, T-CON AND VR LOCATIONS.
2. LVDS/EDP CONNECTOR IS MEASURED AT PIN1 AND ITS MATING LINE.
3. MODULE FLATNESS SPEC (0.5 mm) MAX. (SPEC. WILL BE MODIFIED AFTER DVT CHECK).
4. "()" MARKS THE REFERENCE DIMENSION.
5. LCD HIGHEST PORTION MUST BE TOP POLARIZER AND OTHER LCM MATERIALS MUST BE LOWER THAN TOP POLARIZER. EXCLUDING FOUR CORNERS, THE SOP SHOULD REFER TO "DN0566762" IN INX
6. MEASUREMENT OF THICKNESS MUST BE MEASURED BY CALIPER OR MICROMETER.




Appendix. SYSTEM COVER DESIGN GUIDANCE


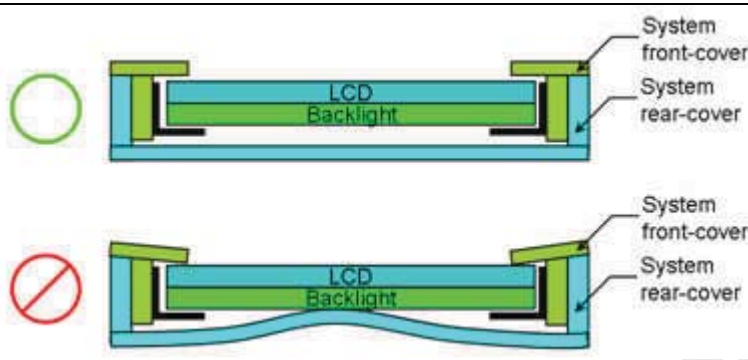
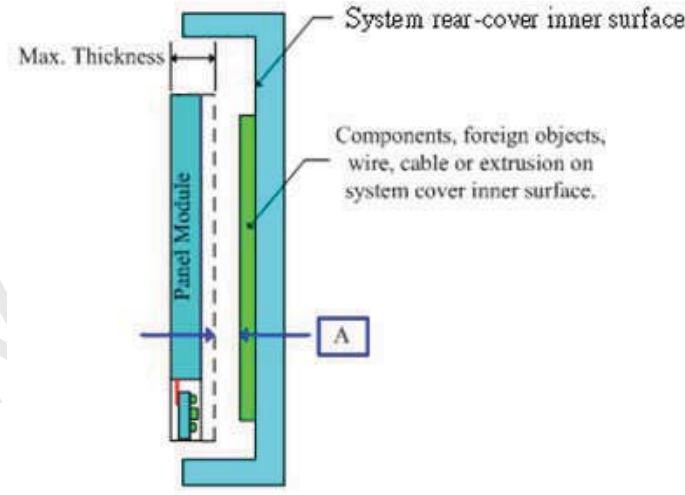
0.	Permanent deformation of system cover after reliability test
	
Definition	System cover including front and rear cover may deform during reliability test. Permanent deformation of system front and rear cover after reliability test should not interfere with panel. Because it may cause issues such as pooling, abnormal display, white spot, and also cell crack. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.
1	Design gap A between panel & any components on system rear-cover
	
Definition	Gap between panel's maximum thickness boundary & system's inner surface components such as wire, cable, extrusion is needed for preventing from backpack or pogo test fail. Because zero gap or interference may cause stress concentration. Issues such as pooling, abnormal display, white spot, and cell crack may occur. Maximum flatness of panel and system rear-cover should be taken into account for gap design. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.
2	Design gap C between system front-cover & panel surface.

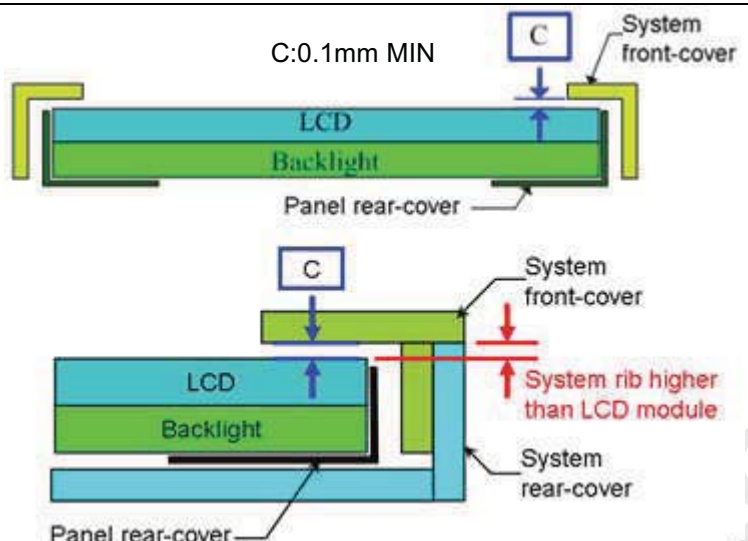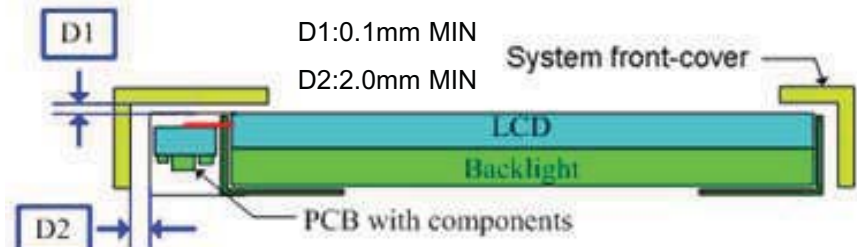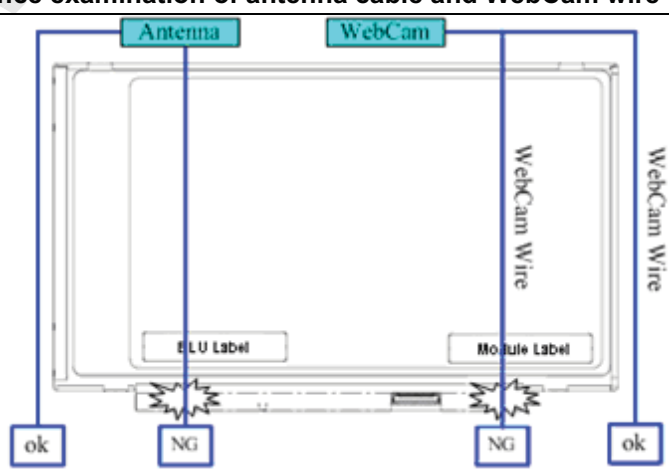 C:0.1mm MIN System front-cover LCD Backlight Panel rear-cover System rear-cover System rib higher than LCD module	
Definition	Gap between system front-cover & panel surface is needed to prevent pooling or glass broken. Zero gap or interference such as burr and warpage from mold frame may cause pooling issue near system front-cover opening edge. This phenomenon is obvious during swing test, hinge test, knock test, or during pooling inspection procedure. To remain sufficient gap, design with system rib higher than maximum panel thickness is recommended. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.
3	Design gap D1 & D2 between system front-cover & PCB Assembly.
 D1 D1:0.1mm MIN D2:2.0mm MIN System front-cover LCD Backlight PCB with components D2	
Definition	Same as point 2 and 3, but focus on PCBA side.
4	Interference examination of antenna cable and WebCam wire
 Antenna WebCam WebCam Wire WebCam Wire BLU Label Module Label ok NG NG ok	
Definition	Antenna cable or WebCam wire should not overlap with panel outline. Because issue such as abnormal display & white spot after backpack test, hinge test, twist test or pogo test may

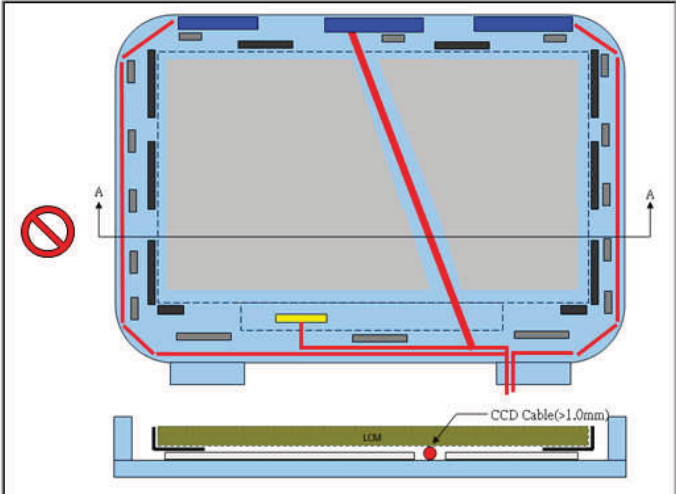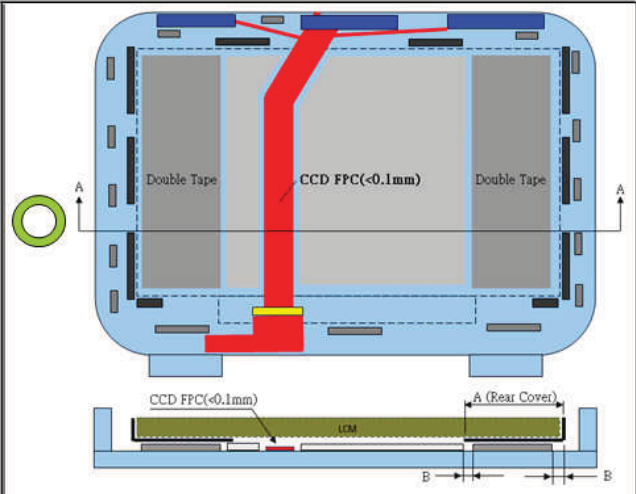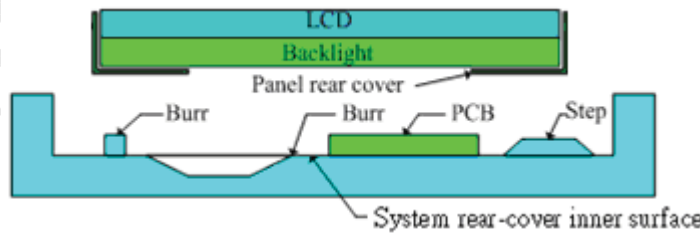	occur. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.																												
5	Interference examination of antenna cable and Web Cam wire - To prevent panel damage, we suggest using CCD FPC to replace CCD cable - Using double tape to fix LCM module for no bracket design.																												
  <table><tr><td></td><td>Rear-cover</td><td></td><td>Connector</td></tr><tr><td></td><td>Sponge</td><td></td><td>Camera/Antenna</td></tr><tr><td></td><td>Double Tape</td><td></td><td>Stopper</td></tr><tr><td></td><td>CDD Cable/FPC</td><td></td><td>LCM Module</td></tr><tr><td></td><td>Hook</td><td></td><td>Panel outline</td></tr></table> <table><tr><td>Rear Cover Width(A)</td><td>A = 30mm</td></tr><tr><td>Cover edge to Double Tape(B)</td><td>B = 3.0mm</td></tr><tr><td>CCD FPC thickness</td><td><0.1mm</td></tr><tr><td>Sponge thickness</td><td>0.5mm 0.2~0.3mm(compressed)</td></tr></table>			Rear-cover		Connector		Sponge		Camera/Antenna		Double Tape		Stopper		CDD Cable/FPC		LCM Module		Hook		Panel outline	Rear Cover Width(A)	A = 30mm	Cover edge to Double Tape(B)	B = 3.0mm	CCD FPC thickness	<0.1mm	Sponge thickness	0.5mm 0.2~0.3mm(compressed)
	Rear-cover		Connector																										
	Sponge		Camera/Antenna																										
	Double Tape		Stopper																										
	CDD Cable/FPC		LCM Module																										
	Hook		Panel outline																										
Rear Cover Width(A)	A = 30mm																												
Cover edge to Double Tape(B)	B = 3.0mm																												
CCD FPC thickness	<0.1mm																												
Sponge thickness	0.5mm 0.2~0.3mm(compressed)																												
	If the antenna cable or Web Cam wire must overlap with the panel outline, both sides of the antenna cable or Web Cam wire must have a sponge(Sponge material can not contain NH3) and sponge require higher antenna cable or Web Cam wire.(Antenna cable or Web Cam wire should not overlap with TCON,COF/FPC,Driver IC) Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.																												
6	System rear-cover inner surface examination																												
																													
Definition	Burr at logo edge, steps, protrusions or PCB board may cause stress concentration. White spot or glass broken issue may occur during reliability test.																												


7-1	Tape/sponge design on system inner surface
Definition	To prevent abnormal display & white spot after scuffing test, hinge test, pogo test, backpack test, tape/sponge should be well covered under panel rear-cover. Because tape/sponge in separate location may act as pressure concentration location.
7-2	Tape/sponge design on system inner surface
Definition	To prevent peeling the bezel tape in rework process. The length of double tape is $30 - (A+B)$, A is bezel tape length and B is the double tape attaching tolerance. Ex :A :2mm, B:2mm, the length of double tape is $30-(2+2)=26\text{mm}$.

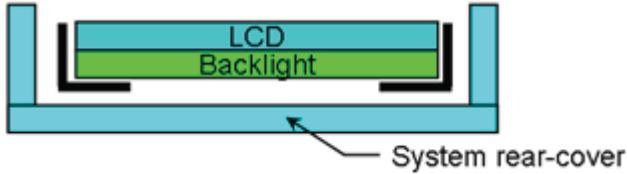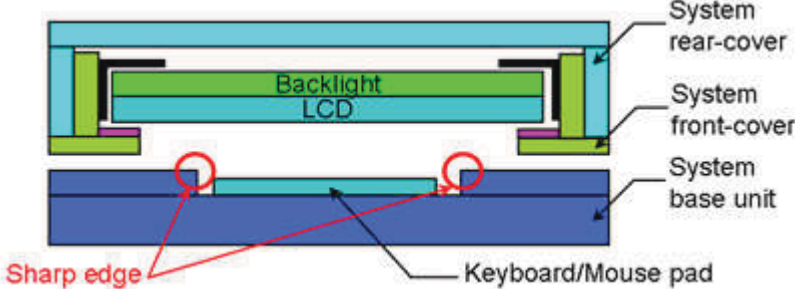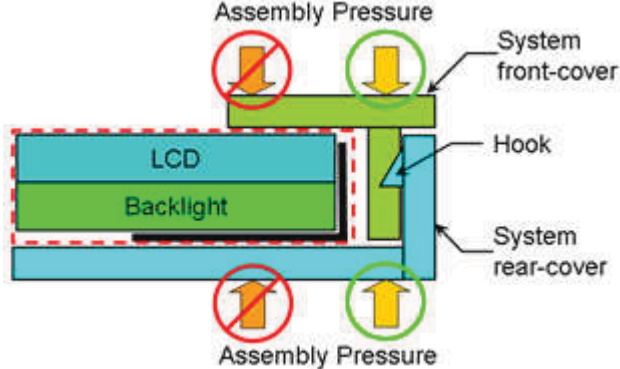8	Material used for system rear-cover
	 System rear-cover material: Al-Mg alloy System rear-cover thickness: 1.5mm MIN
Definition	System rear-cover material with high rigidity is needed to resist deformation during scuffing test, hinge test, pogo test, or backpack test. Abnormal display, white spot, pooling issue may occur if low rigidity material is used. Solid structure design of system rear-cover may also influence the rigidity of system rear-cover. The deformation of system rear-cover should not caused interference.
9	System base unit design near keyboard and mouse pad
	
Definition	To prevent abnormal display & white spot after scuffing test, hinge test, pogo test, backpack test, sharp edge design in keyboard surface may damage panel during the test. We suggest to use slope edge design, or to reduce the thickness difference of keyboard/mouse pad from the nearby surface.
10	Assembly SOP examination for system front-cover with Hook design
	
Definition	To prevent panel crack during system front-cover assembly process with hook design, it is not recommended to press panel or any location that related directly to the panel.

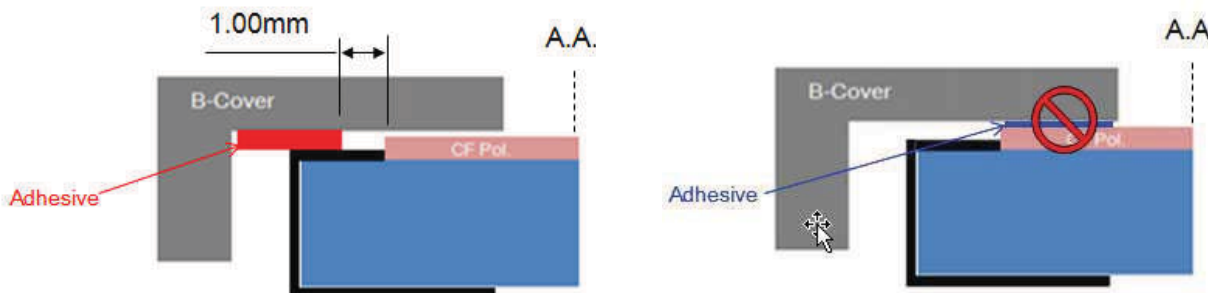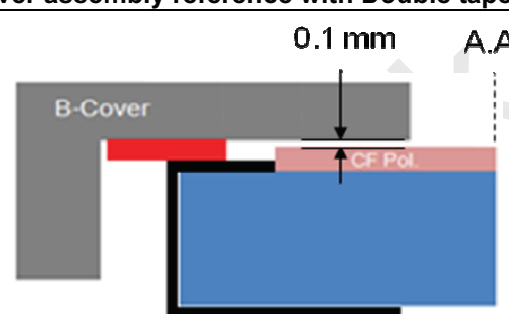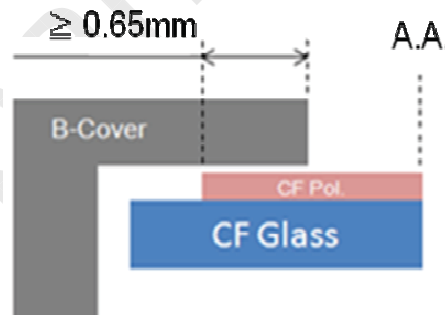11	Assembly SOP examination for system front-cover with Double tape design
	
Definition	To prevent panel crack during system front-cover assembly process with double tape design, When system applied adhesive between B-Cover and LCD module, please design a distance 1.00mm between B-Cover's adhesive and CF pol. Do NOT put adhesive on CF pol.
12	System front-cover assembly reference with Double tape design
	
Definition	To prevent system front-cover peeling at double tape contact area, A gap between B-Cover & CF-Pol. Is 0.1mm min.
13	System front-cover opening area reference with TFT-LCD module
	
Definition	To prevent panel the noise of B-cover & CF Pol. Distance from CF Pol. edge to front-cover edge more than 0.65mm.

14


Touch Application : TP and LCD Module Combination for White Line Prevention

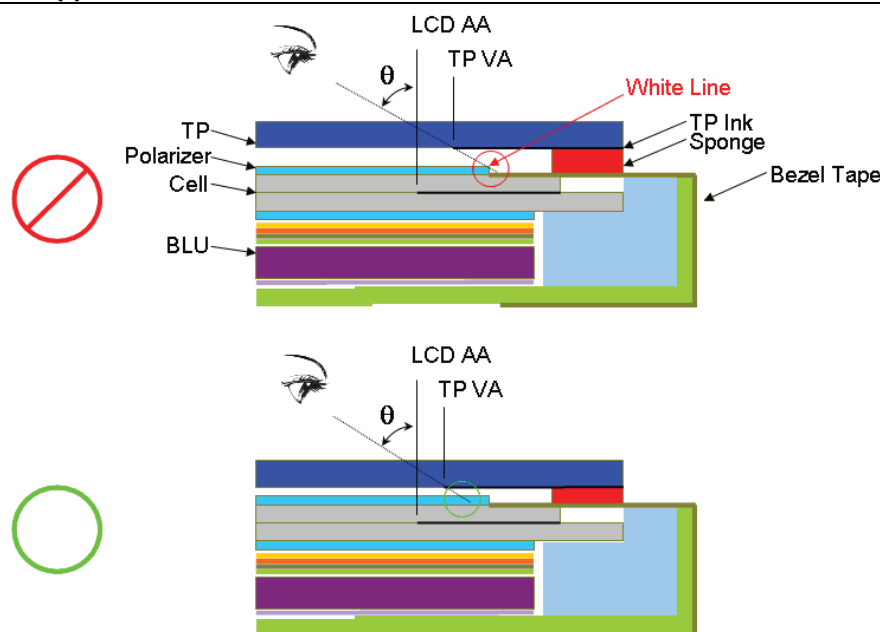

Parameter consideration for White Line Issue :

1	TP VA to LCD AA distance
2	TP Assembly tolerance
3	TP Ink Printing tolerance
4	Sponge thickness and tolerance
5	Inspection/Viewing Angle specification
6	Polarizer edge to LCD AA distance and tolerance

Polarizer edge to LCD AA distance can be derived by "AA~Outline" – "CF Pol~Outline" with respect to INX 2D Outline Drawing on each side.

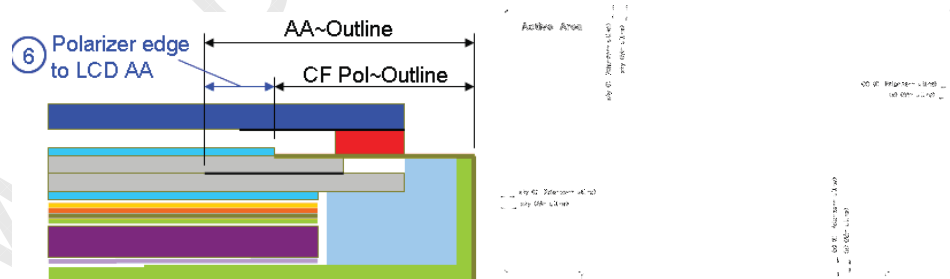

Definition

For using in Touch Application: to prevent White Line appears between TP and LCD module combination, the maximum inspection angle location must not fall onto LCD polarizer edge, otherwise light line near edge of polarizer will be appear.




Parameters such as TP VA to LCD AA distance, TP assembly tolerance, TP Ink printing tolerance, Sponge thickness and tolerance, and Maximum Inspection/Viewing Angle, must be considered with respect to LCD module's Polarizer edge location and tolerance. This consideration must be taken at all four edges separately.

The goal is to find parameters combination that allow maximum inspection angle falls inside polarizer black margin area.

Note: Information for Polarizer edge location and its tolerance can be derived from INX 2D Outline Drawing ("AA ~Outline" - "CF Pol~Outline").

Note: Please feel free to contact INX FAE Engineer. By providing value of parameters above

	on each side, we can help to verify and pass the white line risk assessment for customer reference.
15	Color of system front-cover material Light Leakage System front-cover System rear-cover LCD Backlight Panel Module System front-cover or TP Light leakage
Definition	To prevent light leakage is seen at system front-cover due to material transparency, we suggest using dark color material (black) for system front-cover design.

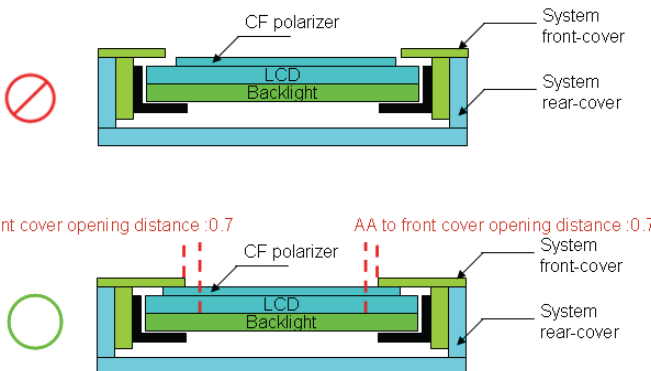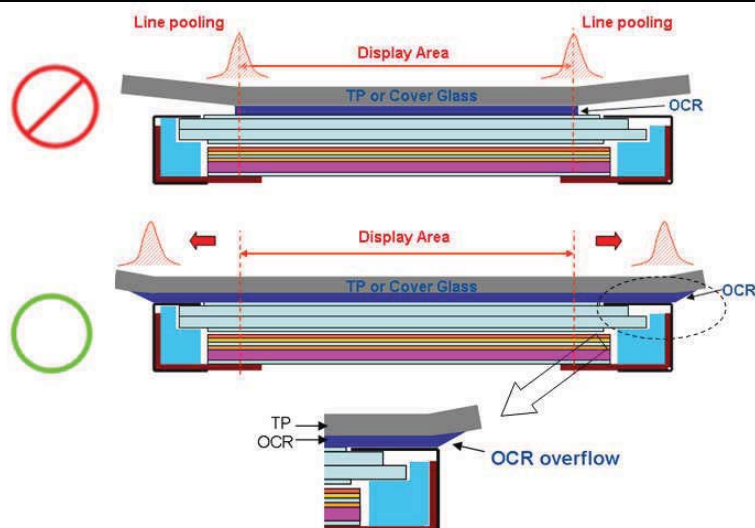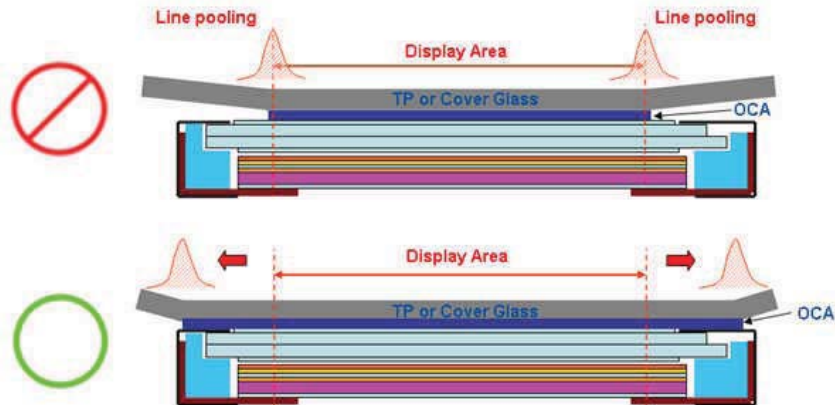16	AA to front cover opening distance
	
Definition	To prevent CF polarizer edge leakage .We suggest front cover opening no more than 0.7mm larger than active area on all 4 sides.
17	Use OCR Lamination
	
Definition	OCR glue as possible beyond module, in order to avoid Line Pooling
18	Use OCA Lamination
	
Definition	OCA glue as possible plastered throughout the module, in order to avoid Line Pooling.

Appendix. LCD MODULE HANDLING MANUAL

Purpose	• This SOP is prepared to prevent panel dysfunction possibility through incorrect handling procedure. • This manual provides guide in unpacking and handling steps. • Any person which may contact / related with panel, should follow guide stated in this manual to prevent panel loss.
1.	Unpacking
  Open carton  Remove EPE Cushion  Open plastic bag  Cut Adhesive Tape  Remove EPE Cushion	
2.	Panel Lifting
 Remove PET Cover  Remove PE Foam  Handle with care (see next page)  Finger Slot Use slots at both sides for finger insertion. Handle panel upward with care.	

3. Do and Don't

Do :

- Handle with both hands.
- Handle panel at left and right edge.



Don't :

- Lifting with one hand.



- Handle at PCBA side.



Don't :

- Stack panels.



- Press panel.



Don't :

- Put foreign stuff onto panel



- Put foreign stuff under panel



Don't :

- Paste any material unto white reflector sheet



Don't :

- Pull / Push white reflector sheet



Don't :

- Hold at panel corner.




Don't :

- Twist panel.



Do :

- Hold panel at top edge while inserting connector.

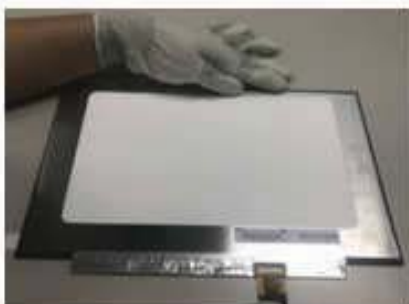

Don't :

- Press white reflector sheet while inserting connector.



Do :

- Remove panel protector film starts from pull tape



Don't :

- Remove panel protector film From film another side.



Do:

- Remove panel protector film starts from Lower-right corner to Top-left

**Don't:**

- Remove panel protector Film parallel X-direction

**Don't :**

- Touch or Press PCBA Area.

