



PRODUCT SPECIFICATION

- ☐ Tentative Specification
☐ Preliminary Specification
☒ Approval Specification

MODEL NO.: N116BGE
SUFFIX: EA2 Rev.C1

Customer: Pegatron

APPROVED BY

SIGNATURE

Name / Title

Note

Please return 1 copy for your confirmation with your signature and comments.

Approved By	Checked By	Prepared By
許君述	趙雪豔	胡凱麗

**CONTENTS**

1. GENERAL DESCRIPTION	4
1.1 OVERVIEW.....	4
1.2 GENERAL SPECIFICATIONS	4
2. MECHANICAL SPECIFICATIONS	5
2.1 CONNECTOR TYPE	5
3. ABSOLUTE MAXIMUM RATINGS	6
3.1 ABSOLUTE RATINGS OF ENVIRONMENT	6
3.2 ELECTRICAL ABSOLUTE RATINGS	7
3.2.1 TFT LCD MODULE	7
4. ELECTRICAL SPECIFICATIONS.....	8
4.1 FUNCTION BLOCK DIAGRAM	8
4.2. INTERFACE CONNECTIONS.....	8
4.3 ELECTRICAL CHARACTERISTICS	10
4.3.1 LCD ELETRONICS SPECIFICATION	10
4.3.2 LED CONVERTER SPECIFICATION.....	12
4.3.3 BACKLIGHT UNIT.....	14
4.4 DISPLAY PORT INPUT SIGNAL TIMING SPECIFICATIONS.....	15
4.4.1 ELECTRICAL SPECIFICATIONS.....	15
4.5 DISPLAY TIMING SPECIFICATIONS.....	16
4.6 POWER ON/OFF SEQUENCE	17
5. OPTICAL CHARACTERISTICS	20
5.1 TEST CONDITIONS	20
5.2 OPTICAL SPECIFICATIONS	20
6. RELIABILITY TEST ITEM	24
7. PACKING.....	25
7.1 MODULE LABEL	25
7.2 CARTON.....	26
7.3 PALLET	27
7.4 UN-PACK METHOD	28
8. PRECAUTIONS	29
8.1 HANDLING PRECAUTIONS	29
8.2 STORAGE PRECAUTIONS.....	29
8.3 OPERATION PRECAUTIONS	29
Appendix. EDID DATA STRUCTURE	30
Appendix. OUTLINE DRAWING	33
Appendix. SYSTEM COVER DESIGN GUIDANCE	35
Appendix. LCD MODULE HANDLING MANUAL	44



PRODUCT SPECIFICATION

REVISION HISTORY

Version	Date	Page	Description
3.0	May.19, 2021	All	Spec Ver.3.0 was first issued.



1. GENERAL DESCRIPTION

1.1 OVERVIEW

N116BGE-EA2 is a 11.6" (11.6" diagonal) TFT Liquid Crystal Display NB module with LED Backlight unit and 30 pins eDP interface. This module supports 1366 x 768 HD mode and can display 262,144 colors. The optimum viewing angle is at 6 o'clock direction

1.2 GENERAL SPECIFICATIONS

Item	Specification	Unit	Note
Screen Size	11.6 diagonal		
Driver Element	a-si TFT active matrix	-	-
Pixel Number	1366 x R.G.B. x 768	pixel	-
Pixel Pitch	0.1875 (H) x 0.1875 (V)	mm	-
Pixel Arrangement	RGB vertical stripe	-	-
Display Colors	262,144	color	-
Color depth	6bit		
Transmissive Mode	Normally white	-	-
Surface Treatment	Hard coating (3H), Anti-Glare	-	-
Color Gamut	45%	NTSC	
Luminance, White	220(typ.)	Cd/m2	
Response Time	Typ:Tr 3 / Tf 7	ms	
Contrast Ratio	Typ:500/Min:350		
Border size(L/R/U)	4.94/6.94/4.6	mm	
View Angle(U/D/R/L)	20/45/45/45	Deg	
Backlight Unit	LEDs 2 strings x 10 parallel		
Electrical Interface	eDP1.2		
RoHs Compliance	Yes		
Power Consumption	Total 2.35 W (Max.) @ cell 0.7W (Max.),BL 1.65 W (Max)		(1)
Special Function	G-sync DD (Not support) G-sync nVSR (Not support) Free-sync (Not support) Static DRRS (Not support) Seamless DRRS(sDRRS)(Not support t) PSR Version(PSR1 or PSR2)(Not support) PSR 1+ sDRRS(Not support) PSR 2+ LRR(Not support) CABG(Not support)		

Note (1) The specified power consumption (with converter efficiency) is under the conditions at VCCS = 3.3 V, fv = 60 Hz, LED_VCCS = Typ, fPWM = 200 Hz, Duty=100% and Ta = 25 ± 2 °C, whereas mosaic pattern is displayed.

Note (2) Display port interface signals should follow VESA DisplayPort Standard Version1. Revision 1a and VESA Embedded DisplayPort™ Standard Version 1.2 (eDP1.2). There are many optional items described in eDP1.2. If some optional item is requested, please contact us.

2. MECHANICAL SPECIFICATIONS

Item		Min.	Typ.	Max.	Unit	Note
Module Size	Horizontal (H)	267.5	268	268.5	mm	Without bracket (1), (2)
	Vertical (V)	157	157.5	158	mm	
	Thickness (T)	-	2.85	3.0	mm	
Active Area	Horizontal	256.025	256.125	256.225	mm	
	Vertical	143.9	144	144.1	mm	
Weight		-	200	210	g	

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

(2) Dimensions are measured by caliper.

**2.1 CONNECTOR TYPE**

Please refer appendix outline drawing for detail design.

Connector Part No. : IPEX-20455-030E-12

User's connector Part No: IPEX-20453-030T-03

3. ABSOLUTE MAXIMUM RATINGS

3.1 ABSOLUTE RATINGS OF ENVIRONMENT


Item	Symbol	Value		Unit	Note
		Min.	Max.		
Storage Temperature	T _{ST}	-20	+60	°C	(1)
Operating Ambient Temperature	T _{OP}	0	+50	°C	(1), (2)
Shock (Non-Operating)	S _{NOP}	--	220/2	G/ms	(3),(4),(5)
Vibration (Non-Operating)	V _{NOP}	--	1.5	G	(3),(4),(6)

Note (1) (a) 90 %RH Max. (Ta < 40 °C).

(b) Wet-bulb temperature should be 39 °C Max.

(c) No condensation.

Note (2) The temperature of panel surface should be 0 °C min. and 60 °C max.

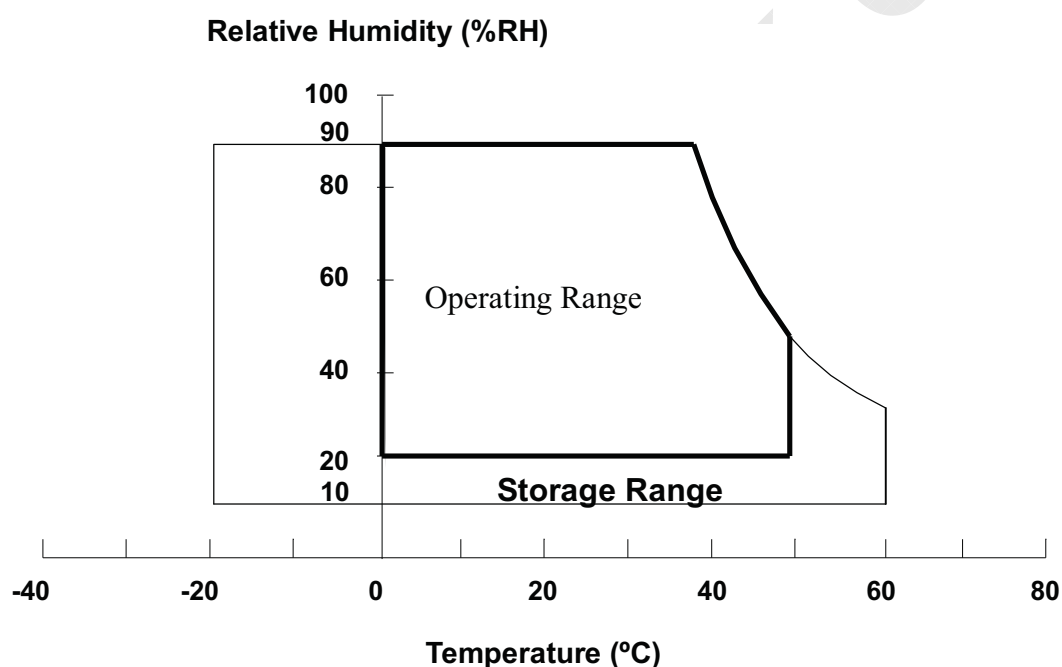

Note (3) criteria: Normal display image with no obvious non-uniformity and no line defect.

Note (4) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

Note (5) half sine wave, 1 time for each direction of $\pm X, \pm Y, \pm Z$

Note (6) 10-500 Hz, Sine wave, 30 min/cycle, 1cycle for each X, Y, Z


**3.2 ELECTRICAL ABSOLUTE RATINGS****3.2.1 TFT LCD MODULE**

Item	Symbol	Value		Unit	Note
		Min.	Max.		
Power Supply Voltage	VCCS	-0.3	+4.0	V	(1)
Logic Input Voltage	V _{IN}	-0.3	+4.0	V	
Converter Input Voltage	LED_VCCS	-0.3	26	V	(1)
Converter Control Signal Voltage	LED_PWM,	-0.3	5	V	(1)
Converter Control Signal Voltage	LED_EN	-0.3	5	V	(1)

Note (1) Stresses beyond those listed in above “ELECTRICAL ABSOLUTE RATINGS” may cause permanent damage to the device. Normal operation should be restricted to the conditions described in “ELECTRICAL CHARACTERISTICS”.

4. ELECTRICAL SPECIFICATIONS

4.1 FUNCTION BLOCK DIAGRAM

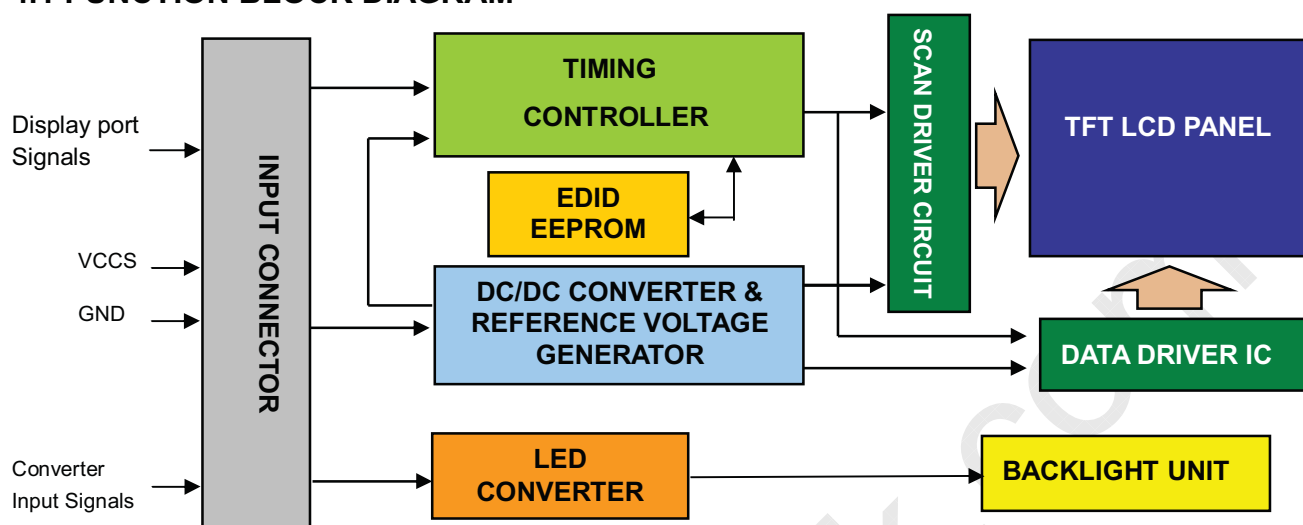


4.2. INTERFACE CONNECTIONS

PIN ASSIGNMENT

Pin	Symbol	Description	Remark
1	NC	No Connection (Reserved for LCD test)	
2	H_GND	High Speed Ground	
3	NC	No Connection (Reserved for LCD test)	
4	NC	No Connection (Reserved for LCD test)	
5	H_GND	High Speed Ground	
6	Lane0_N	Complement Signal Link Lane 0	
7	Lane0_P	True Signal Link Lane 0	
8	H_GND	High Speed Ground	
9	AUX_CH_P	True Signal Auxiliary Channel	
10	AUX_CH_N	Complement Signal Auxiliary Channel	
11	H_GND	High Speed Ground	
12	VCCS	LCD logic and driver power	
13	VCCS	LCD logic and driver power	
14	BIST_EN	Panel Built In Self Test Enable	Note (2)
15	GND	LCD logic and driver ground	
16	GND	LCD logic and driver ground	
17	HPD	HPD signal pin	
18	BL_GND	Backlight ground	
19	BL_GND	Backlight ground	
20	BL_GND	Backlight ground	
21	BL_GND	Backlight ground	
22	LED_EN	Backlight on /off	
23	LED_PWM	System PWM signal input for dimming	
24	NC	No Connection (Reserved for LCD test)	

25	NC	No Connection (Reserved for LCD test)	
26	LED_VCCS	BL Power	
27	LED_VCCS	BL Power	
28	LED_VCCS	BL Power	
29	LED_VCCS	BL Power	
30	NC	No Connection (Reserved for LCD test)	

Note (1) The first pixel is odd as shown in the following figure.

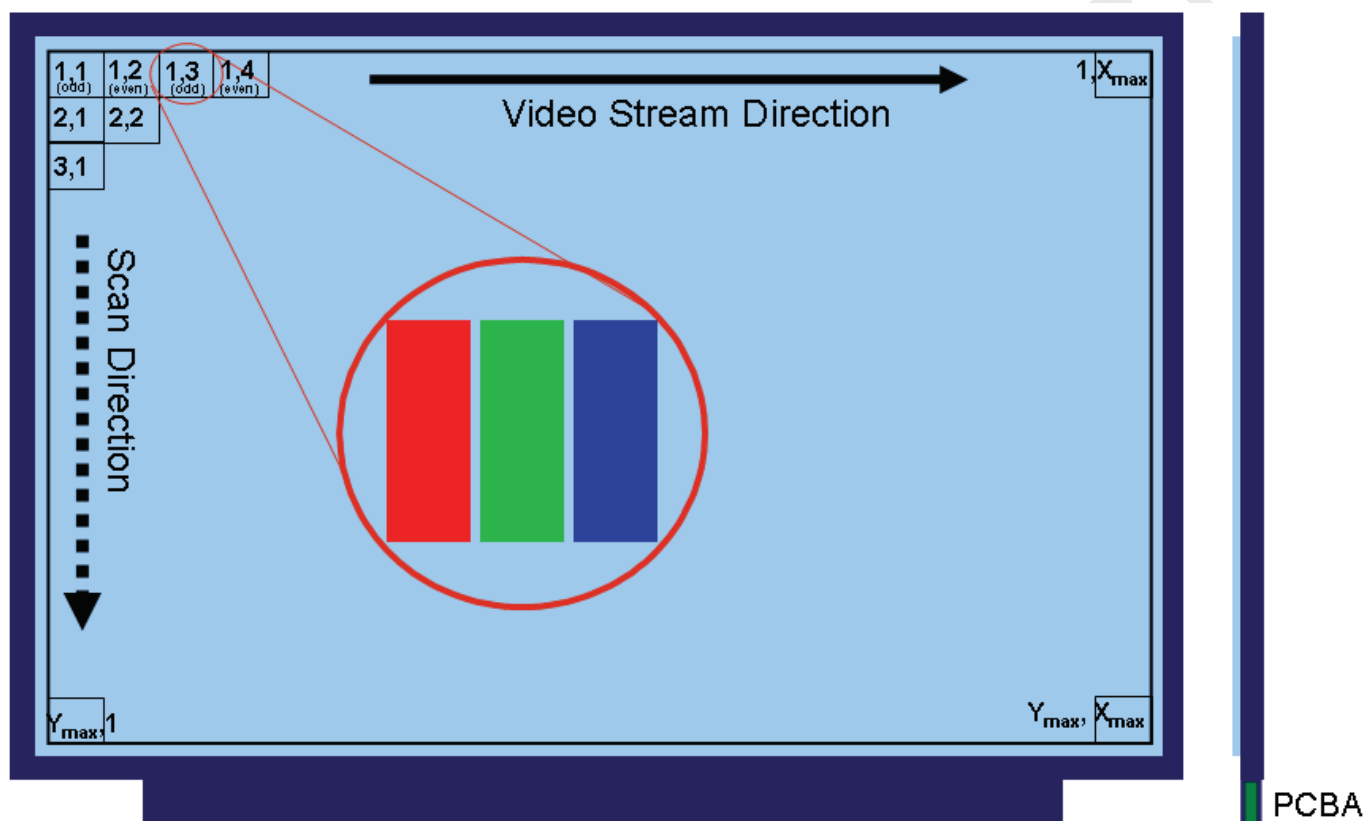

4.3 ELECTRICAL CHARACTERISTICS

4.3.1 LCD ELETRONICS SPECIFICATION


Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Power Supply Voltage		VCCS	3.0	3.3	3.6	V	(1)
Ripple Voltage		V _{RP}	-	-	100	mV	(1)
Inrush Current		I _{RUSH}	-	-	1.5	A	(1),(2)
Power Supply Current	Black	I _{CC}	-	198	213	mA	(3)
	Mosaic		-	178	190	mA	(3)
	Solid Pattern		-	230	280	mA	(3)
HPD Impedance		R _{HPD}	30K			ohm	(4)
HPD	High Level		2.25	-	3.6	V	(5)
	Low Level		0	-	0.8	V	(5)

Note (1) The ambient temperature is $T_a = 25 \pm 2^\circ\text{C}$.


Note (2) I_{RUSH}: the maximum current when VCCS is rising

I_{IS}: the maximum current of the first 100ms after power-on

Measurement Conditions: Shown as the following figure. Test pattern: White

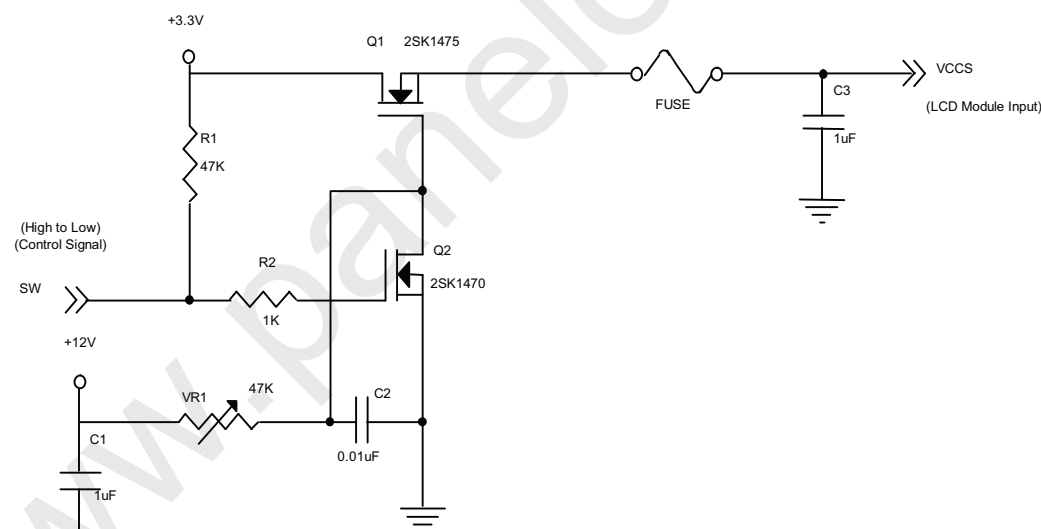


VCCS rising time is 0.5ms

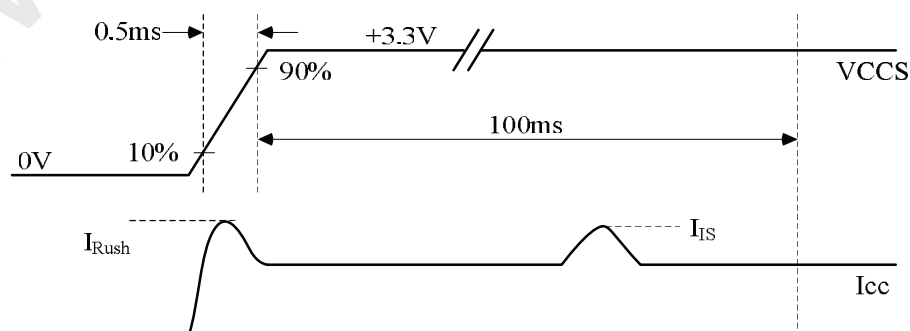

Note (3) The specified power supply current is under the conditions at $V_{CCS} = 3.3\text{ V}$, $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$, DC Current and $f_v = 60\text{ Hz}$, whereas a power dissipation check pattern below is displayed.

a. Mosaic Pattern

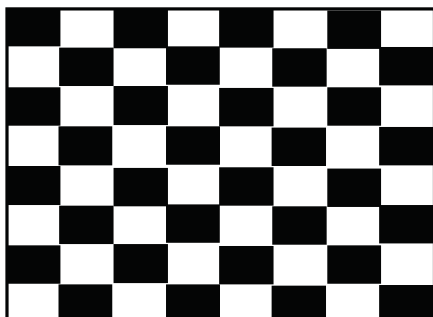

Active Area

b. The solid pattern is the largest one of R/G/B pattern.

Note (4) The specified signals have equivalent impedances pull down to ground in the LCD module respectively. Customers should keep the input signal level requirement with the load of LCD module. Please refer to Note (4) of 4.3.2 LED CONVERTER SPECIFICATION to obtain more information.

Note (5) When a source detects a low-going HPD pulse, it must be regarded as a HPD event. Thus, the source must read the link / sink status field or receiver capability field of the DPCD and take corrective action.


4.3.2 LED CONVERTER SPECIFICATION

Parameter		Symbol	Value			Unit	Note
			Min.	Typ.	Max.		
Converter Input Power Supply Voltage		LED_Vccs	5.0	12.0	21.0	V	
Converter Inrush Current		I _{LED_RUSH}	-	-	1.5	A	(1)
LED_EN Control Level	Backlight On		2.2	-	3.6	V	(4)
	Backlight Off		0	-	0.6	V	(4)
LED_EN Impedance		R _{LED_EN}	30K	-	-	ohm	(4)
PWM Control Level	PWM High Level		2.2	-	3.6	V	(4)
	PWM Low Level		0	-	0.6	V	(4)
PWM Impedance		R _{PWM}	30K	-	-	ohm	(4)
PWM Control Duty Ratio			5	-	100	%	(5)
PWM Control Permissive Ripple Voltage		V _{PWM_pp}	-	-	100	mV	
PWM Control Frequency		f _{PWM}	190	-	2K	Hz	(2)
LED Power Current	LED_VCCS =Typ.	I _{LED}	120	126	137.5	mA	(3)


Note (1) I_{LED_RUSH}: the maximum current when LED_VCCS is rising,

I_{LED_IS}: the maximum current of the first 100ms after power-on,

Measurement Conditions: Shown as the following figure. LED_VCCS = Typ, Ta = 25 ± 2 °C, f_{PWM} = 200 Hz, Duty=100%.

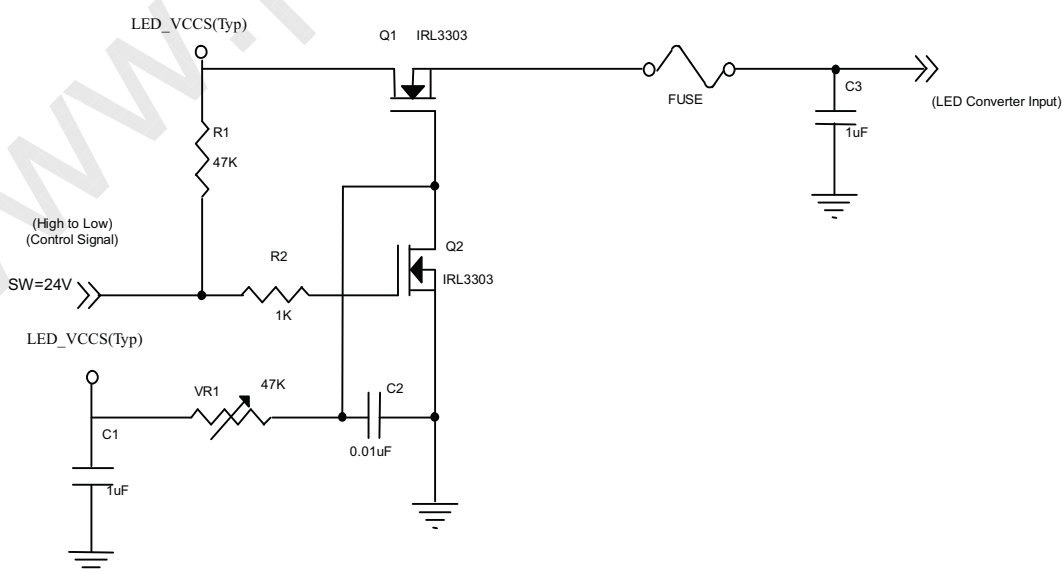

VLED rising time is 0.5ms

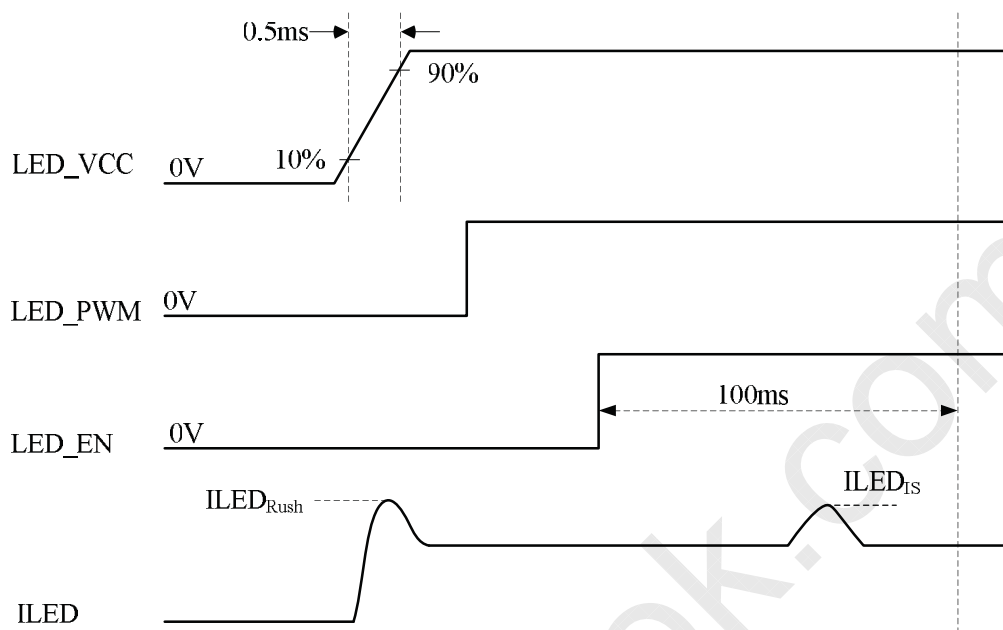

Note (2) If PWM control frequency is applied in the range less than 1KHz, the “waterfall” phenomenon on the screen may be found. To avoid the issue, it's a suggestion that PWM control frequency should follow the criterion as below.

PWM control frequency f_{PWM} should be in the range


$$(N + 0.33) * f \leq f_{PWM} \leq (N + 0.66) * f$$

N : Integer ($N \geq 3$)

f : Frame rate

Note (3) The specified LED power supply current is under the conditions at “LED_VCCS = Typ.”, $T_a = 25 \pm 2^\circ\text{C}$, $f_{PWM} = 200\text{ Hz}$, Duty=100%.

Note (4) The specified signals have equivalent impedances pull down to ground in the LCD module respectively. Customers should keep the input signal level requirement with the load of LCD module. For example, the figure below describes the equivalent pull down impedance of LED_EN (If it exists). The rest pull down impedances of other signals (eg. HPD, PWM ...) are in the same concept.

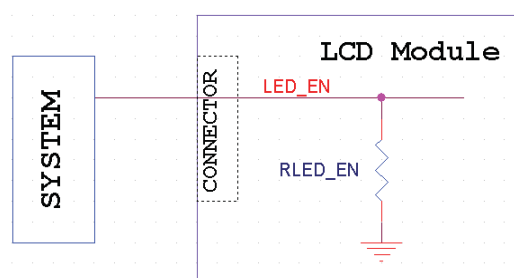


Note (5) If the cycle-to-cycle difference of PWM duty exceeds 0.1%, especially when the PWM duty is low, slight brightness change might be observed.

4.3.3 BACKLIGHT UNIT

 $T_a = 25 \pm 2^\circ\text{C}$

Parameter	Symbol	Value			Unit	Note
		Min.	Typ.	Max.		
LED Light Bar Power Supply Voltage	V_L	26	29	30	V	(1)(2)(Duty100%)
LED Light Bar Power Supply Current	I_L	--	47	--	mA	
Power Consumption	P_L	--	1.36	1.41	W	(3)
LED Life Time	L_{BL}	15000	-	-	Hrs	(4)

Note (1) LED current is measured by utilizing a high frequency current meter as shown below :

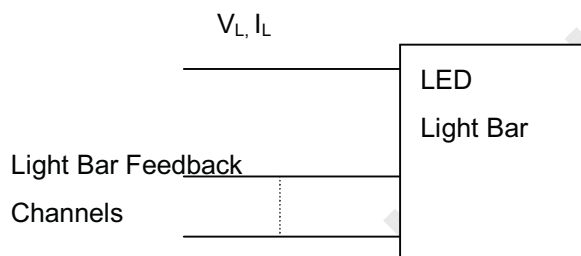

Note (2) For better LED light bar driving quality, it is recommended to utilize the adaptive boost converter with current balancing function to drive LED light-bar.

Note (3) $P_L = I_L \times V_L$ (Without LED converter transfer efficiency)


Note (4) The lifetime of LED is defined as the time when it continues to operate under the conditions at $T_a = 25 \pm 2^\circ\text{C}$ and $I_L = 23.5\text{mA}$ (Per EA) until the brightness becomes $\leq 50\%$ of its original value.

4.4 DISPLAY PORT INPUT SIGNAL TIMING SPECIFICATIONS


4.4.1 ELECTRICAL SPECIFICATIONS

Parameter	Symbol	Min.	Typ.	Max.	Unit	Notes
Differential Signal Common Mode Voltage(MainLink and AUX)	VCM	0		2	V	(1)(4)
AUX AC Coupling Capacitor	C_Aux_Source	75		200	nF	(2)
Main Link AC Coupling Capacitor	C_ML_Source	75		200	nF	(3)


Note (1) Display port interface related AC coupled signals should follow VESA DisplayPort Standard Version1. Revision 1a and VESA Embedded DisplayPort™ Standard Version 1.2. There are many optional items described in eDP1.2. If some optional item is requested, please contact us.

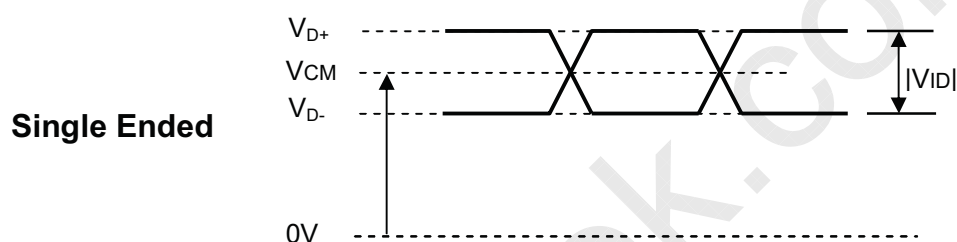

(2) Recommended eDP AUX Channel topology is as below and the AUX AC Coupling Capacitor (C_Aux_Source) should be placed on the source device.

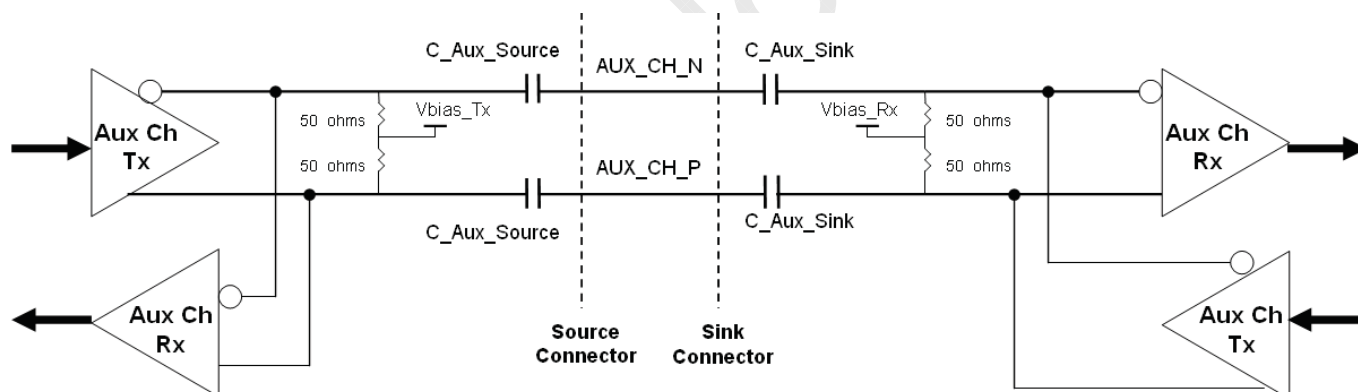

(3) Recommended Main Link Channel topology is as below and the Main Link AC Coupling Capacitor (C_ML_Source) should be placed on the source device.

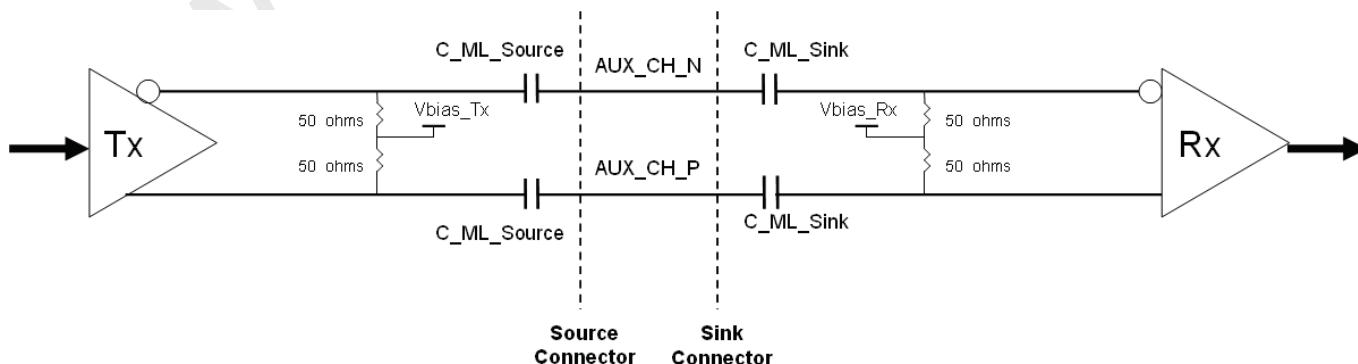

(4) The source device should pass the test criteria described in DisplayPortCompliance Test Specification (CTS) 1.1


4.5 DISPLAY TIMING SPECIFICATIONS

The input signal timing specifications are shown as the following table and timing diagram.


Refresh Rate 60Hz

Signal	Item	Symbol	Min.	Typ.	Max.	Unit	Note
DCLK	Frequency	1/Tc	72.6	76.42	80.24	MHz	-
DE	Vertical Total Time	TV	788	800	1000	TH	-
	Vertical Active Display Period	TVD	768	768	768	TH	-
	Vertical Active Blanking Period	TVB	TV-TVD	32	TV-TVD	TH	-
	Horizontal Total Time	TH	1556	1592	1716	Tc	-
	Horizontal Active Display Period	THD	1366	1366	1366	Tc	-
	Horizontal Active Blanking Period	THB	TH-THD	226	TH-THD	Tc	-

INPUT SIGNAL TIMING DIAGRAM

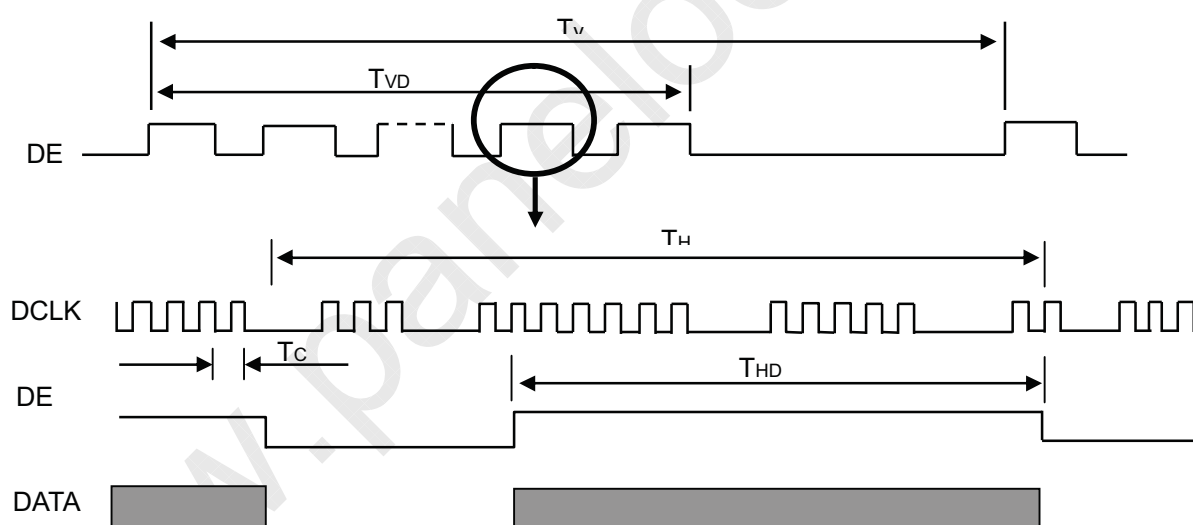

4.6 POWER ON/OFF SEQUENCE

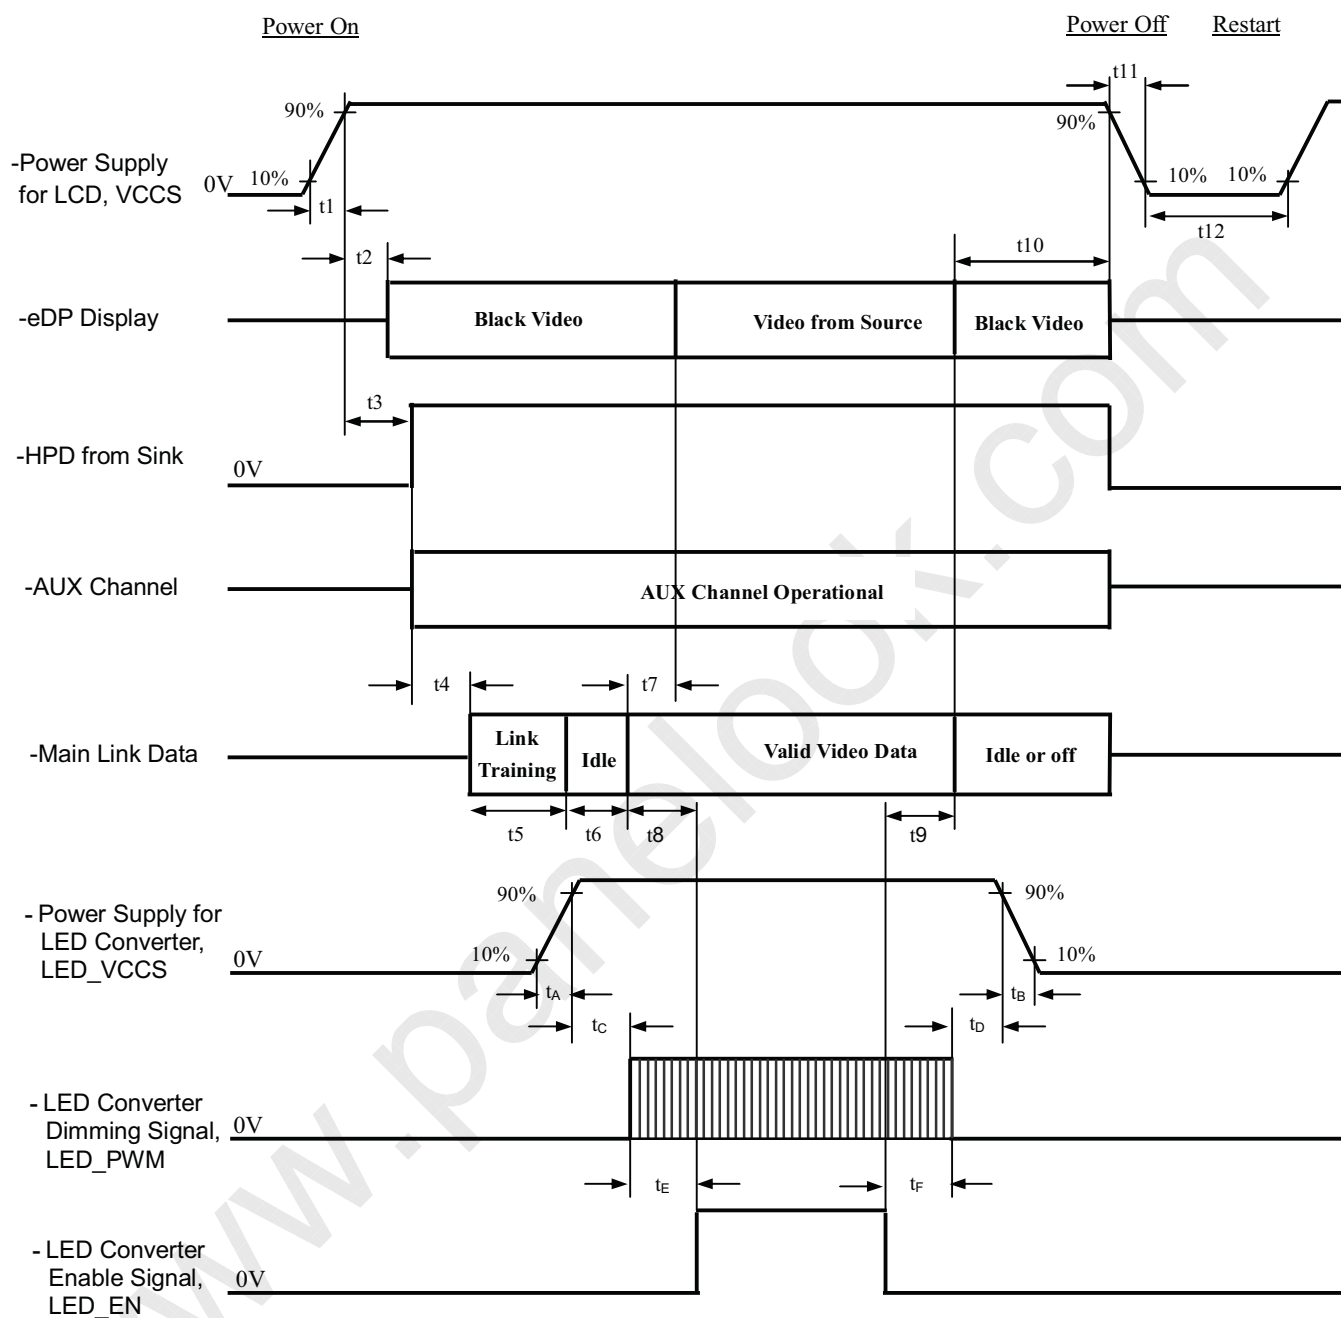



PRODUCT SPECIFICATION

Timing Specifications

Parameter	Description	Reqd. By	Value		Unit	Notes
			Min	Max		
t1	Power rail rise time, 10% to 90%	Source	0.5	10	ms	-
t2	Delay from LCD,VCCS to black video generation	Sink	0	200	ms	Automatic Black Video generation prevents display noise until valid video data is received from the Source (see Notes:2 and 3 below)
t3	Delay from LCD,VCCS to HPD high	Sink	0	200	ms	Sink AUX Channel must be operational upon HPD high (see Note:4 below)
t4	Delay from HPD high to link training initialization	Source	0	-	ms	Allows for Source to read Link capability and initialize
t5	Link training duration	Source	0	-	ms	Dependant on Source link training protocol
t6	Link idle	Source	0	-	ms	Min Accounts for required BS-Idle pattern. Max allows for Source frame synchronization
t7	Delay from valid video data from Source to video on display	Sink	0	50	ms	Max value allows for Sink to validate video data and timing. At the end of T7, Sink will indicate the detection of valid video data by setting the SINK_STATUS bit to logic 1 (DPCD 00205h, bit 0), and Sink will no longer generate automatic Black Video
t8	Delay from valid video data from Source to backlight on	Source	80	-	ms	Source must assure display video is stable *: Recommended by INX. To avoid garbage image.
t9	Delay from backlight off to end of valid video data	Source	50	-	ms	Source must assure backlight is no longer illuminated. At the end of T9, Sink will indicate the detection of no valid video data by setting the SINK_STATUS bit to logic 0 (DPCD 00205h, bit 0), and Sink will automatically display Black Video. (See Notes: 2 and 3 below) *: Recommended by INX. To avoid garbage image.
t10	Delay from end of valid video data from Source to power off	Source	0	500	ms	Black video will be displayed after receiving idle or off signals from Source
t11	VCCS power rail fall time, 90% to 10%	Source	0.5	10	ms	-



PRODUCT SPECIFICATION

t ₁₂	VCCS Power off time	Source	500	-	ms	-
t _A	LED power rail rise time, 10% to 90%	Source	0.5	10	ms	-
t _B	LED power rail fall time, 90% to 10%	Source	0	10	ms	-
t _C	Delay from LED power rising to LED dimming signal	Source	1	-	ms	-
t _D	Delay from LED dimming signal to LED power falling	Source	1	-	ms	-
t _E	Delay from LED dimming signal to LED enable signal	Source	0	-	ms	-
t _F	Delay from LED enable signal to LED dimming signal	Source	0	-	ms	-

Note (1) Please don't plug or unplug the interface cable when system is turned on.

Note (2) The Sink must include the ability to automatically generate Black Video autonomously. The Sink must automatically enable Black Video under the following conditions:

- Upon LCDVCC power-on (within T2 max)
- When the "NoVideoStream_Flag" (VB-ID Bit 3) is received from the Source (at the end of T9)

Note (3) The Sink may implement the ability to disable the automatic Black Video function, as described in Note (2), above, for system development and debugging purposes.

Note (4) The Sink must support AUX Channel polling by the Source immediately following LCDVCC power-on without causing damage to the Sink device (the Source can re-try if the Sink is not ready). The Sink must be able to response to an AUX Channel transaction with the time specified within T3 max.

PRODUCT SPECIFICATION

5. OPTICAL CHARACTERISTICS

5.1 TEST CONDITIONS


Item	Symbol	Value	Unit
Ambient Temperature	Ta	25±2	°C
Ambient Humidity	Ha	50±10	%RH
Supply Voltage	V _{CC}	3.3	V
Input Signal	According to typical value in "3. ELECTRICAL CHARACTERISTICS"		
LED Light Bar Input Current	I _L	47	mA

The measurement methods of optical characteristics are shown in Section 5.2. The following items should be measured under the test conditions described in Section 5.1 and stable environment shown in Note (5).

5.2 OPTICAL SPECIFICATIONS

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Contrast Ratio		CR	$\theta_x=0^\circ, \theta_Y=0^\circ$ Viewing Normal Angle	350	500	-	-	(2), (5) ,(7)
Response Time		T _R		-	3	8	ms	(3) ,(7)
		T _F		-	7	12	ms	
Average Luminance of White		L _{Ave}		187	220	-	cd/m ²	(4), (6) ,(7)
Color Chromaticity	Red	R _x		Typ – 0.03	0.570	Typ + 0.03	-	(1) ,(7)
		R _y			0.333		-	
	Green	G _x			0.325		-	
		G _y			0.582		-	
	Blue	B _x			0.160		-	
		B _y			0.144		-	
	White	W _x			0.313		-	
		W _y			0.329		-	
NTSC		CG			45		%	(5),(7),(8)
Cross talk		CT				4	%	5),(7),(9)
Viewing Angle	Horizontal	θ _x +	CR≥10	40	45		Deg.	(1),(5) ,(7))
		θ _x -		40	45	-		
	Vertical	θ _y +		15	20	-		
		θ _y -		40	45	-		
White Variation of 5 Points		δW _{5p}	$\theta_x=0^\circ, \theta_Y=0^\circ$	80			%	(5),(6) , (7)

Note (1) Definition of Viewing Angle (θ_x , θ_y):

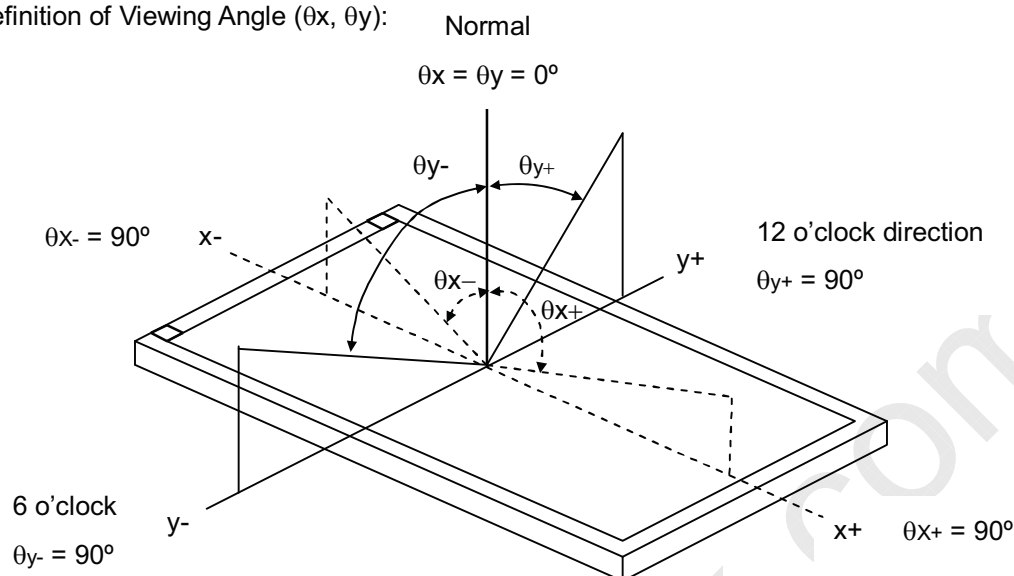

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$


L63: Luminance of gray level 63

L 0: Luminance of gray level 0

$$CR = CR(1)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R , T_F):

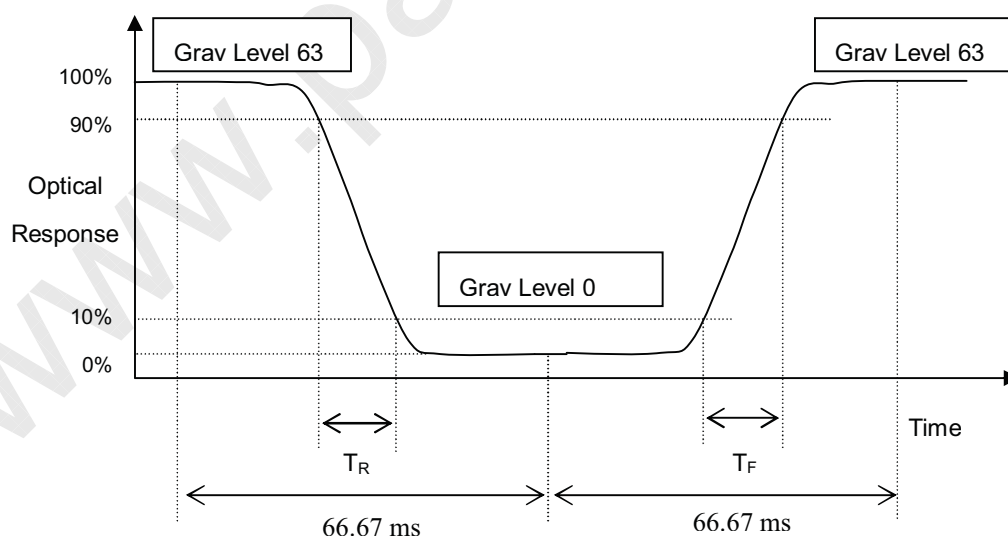

Note (4) Definition of Average Luminance of White (L_{AVE}):


Measure the luminance of gray level 63 at 5 points

$$L_{AVE} = [L(1) + L(2) + L(3) + L(4) + L(5)] / 5$$

L (x) is corresponding to the luminance of the point X at Figure in Note (6)

Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

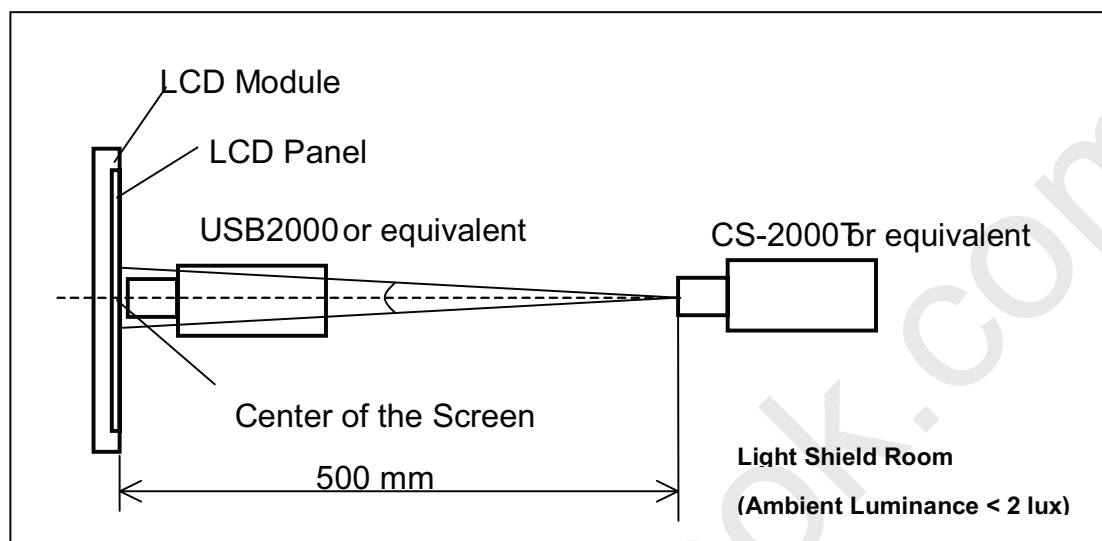

Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 63 at 5 points

$$\delta W_{5p} = \{ \text{Minimum } [L(1) \sim L(5)] / \text{Maximum } [L(1) \sim L(5)] \} * 100\%$$

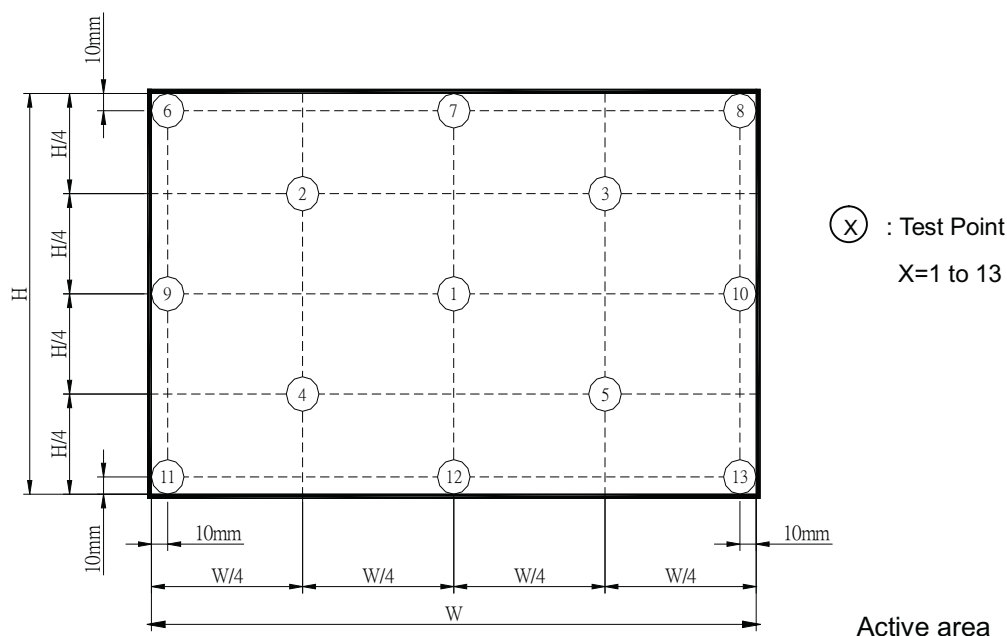

Note (7) The listed optical specifications refer to the initial value of manufacture, but the condition of the specifications after long-term operation will not be warranted.

Note (8) Definition of color gamut (C.G%):


$$C.G\% = \text{Area}(R, G, B) / \text{Area}(R_0, G_0, B_0) \times 100\%$$

R_0, G_0, B_0 : CIE1931 coordinates of red, green, and blue defined by NTSC.

R, G, B : CIE1931 coordinates of red, green, and blue in module at 63 gray level.

Area (R_0, G_0, B_0): Area of the triangle defined by coordinate R_0, G_0, B_0 .

Area(R, G, B): Area of the triangle defined by

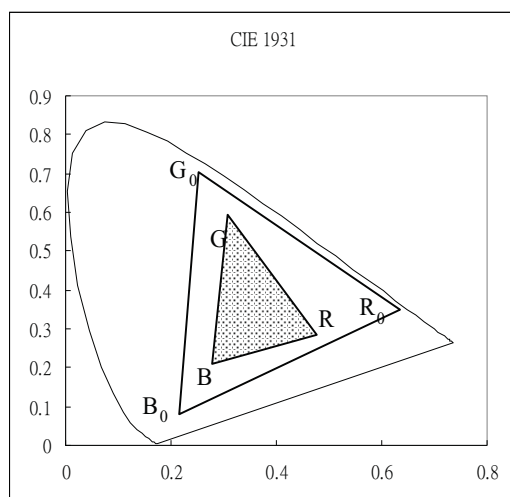

coordinate R, G, B



Note (9) Cross Talk (CT):

$$CT = |Y_B - Y_A| / Y_A \times 100\%$$

Where

Y_A =Luminance of measured location in left figure

Y_B =Luminance of measured location in right figure

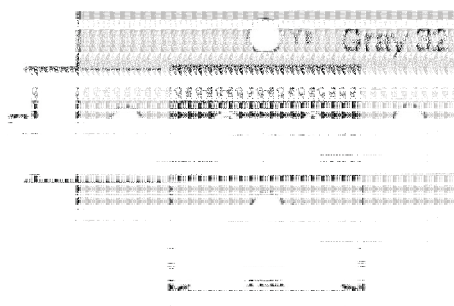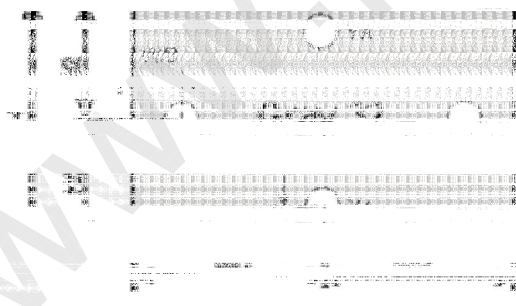

6. RELIABILITY TEST ITEM

Test Item	Test Condition	Note
High Temperature Storage Test	60°C, 240 hours	(1) (2)
Low Temperature Storage Test	-20°C, 240 hours	
Thermal Shock Storage Test	-20°C, 0.5hour←→60°C, 0.5hour; 100cycles, 1hour/cycle	
High Temperature Operation Test	50°C, 240 hours	
Low Temperature Operation Test	0°C, 240 hours	
High Temperature & High Humidity Operation Test	50°C, RH 80%, 240hours	
High Temperature & High Humidity Storage Test	40°C, RH 90%, 240hours	(1)
ESD Test (Operation)	150pF, 330Ω, 1sec/cycle Condition 1 : Contact Discharge, ±8KV Condition 2 : Air Discharge, ±15KV	
Shock (Non-Operating)	220G, 2ms, half sine wave, 1 time for each direction of ±X, ±Y, ±Z	
Vibration (Non-Operating)	1.5G / 10-500 Hz, Sine wave, 30 min/cycle, 1cycle for each X, Y, Z	

Note (1) criteria : Normal display image with no obvious non-uniformity and no line defect.


Note (2) Evaluation should be tested after storage at room temperature for more than two hour

Note (3) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.


7. PACKING

7.1 MODULE LABEL

The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.

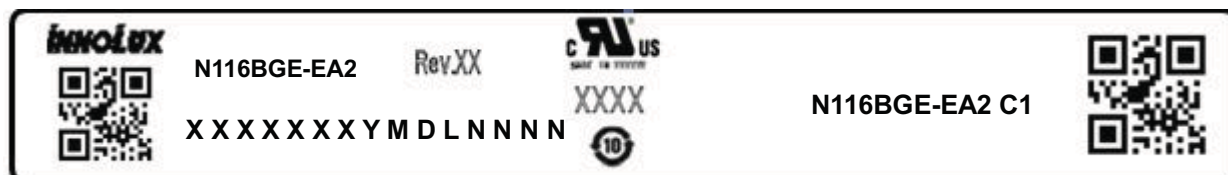

- (a) Model Name: N116BGE–EA2
- (b) Revision: Rev. XX, for example: C1, C2 ...etc.
- (c) Serial ID: XXXXXXYYMDLNNNN

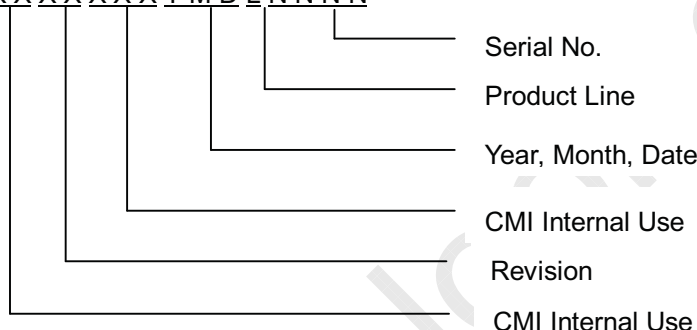

- (d) Production Location: MADE IN XXXX.
- (e) UL Logo: XXXX is UL factory ID.

Serial ID includes the information as below:

- (a) Manufactured Date: Year: 0~9, for 2020~2029
 Month: 1~9, A~C, for Jan. ~ Dec.
 Day: 1~9, A~Y, for 1st to 31st, exclude I, O and U
- (b) Revision Code: cover all the change
- (c) Serial No.: Manufacturing sequence of product
- (d) Product Line: 1 -> Line1, 2 -> Line 2, ...etc.

7.2 CARTON

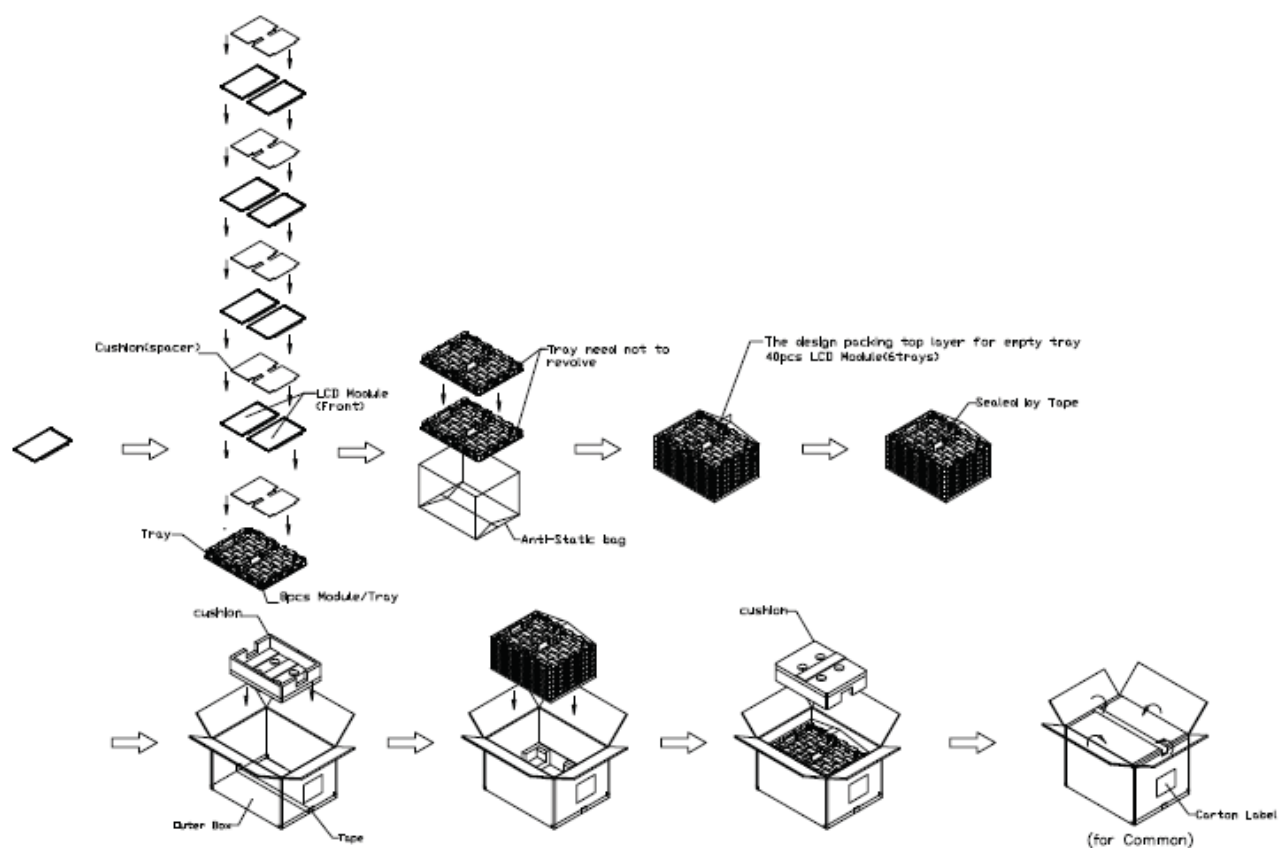
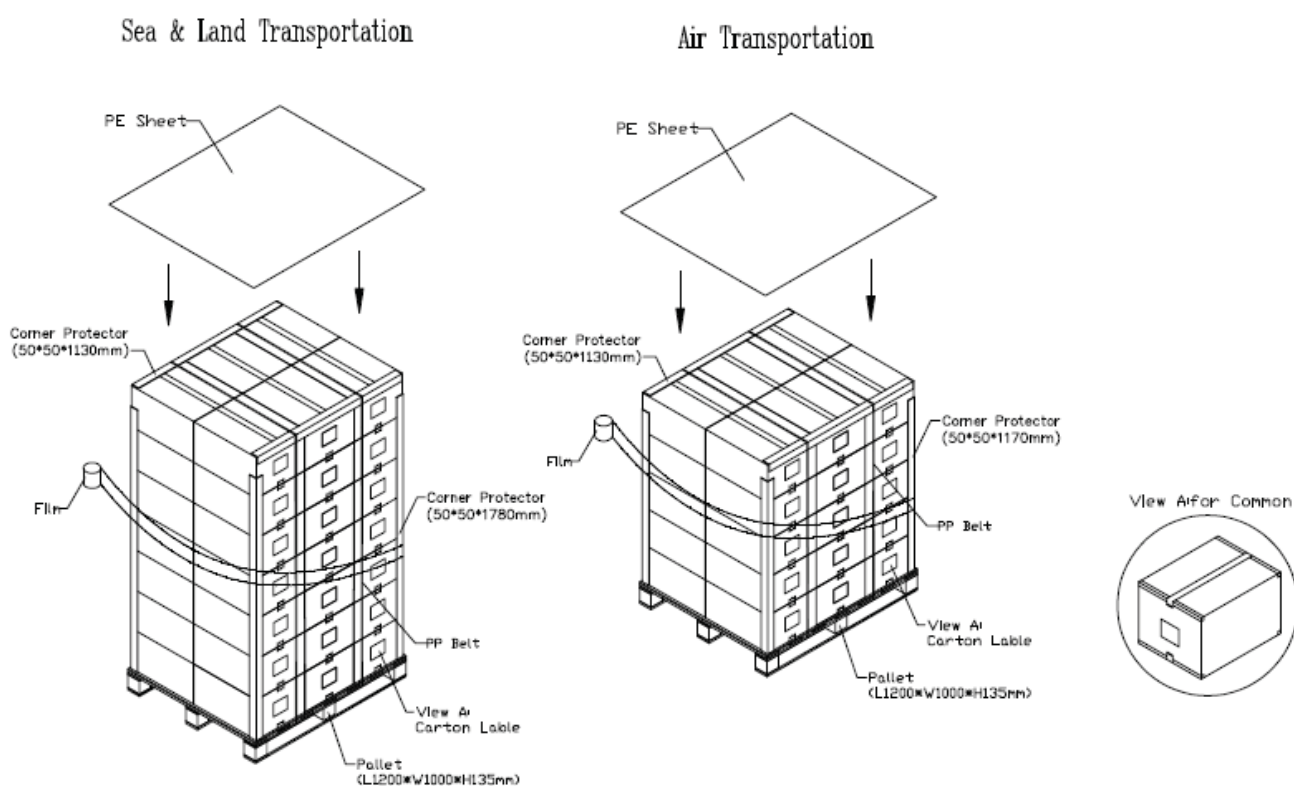


Figure. 7-1 Packing method

7.3 PALLET**Figure. 7-2 Packing method**

7.4 UN-PACK METHOD

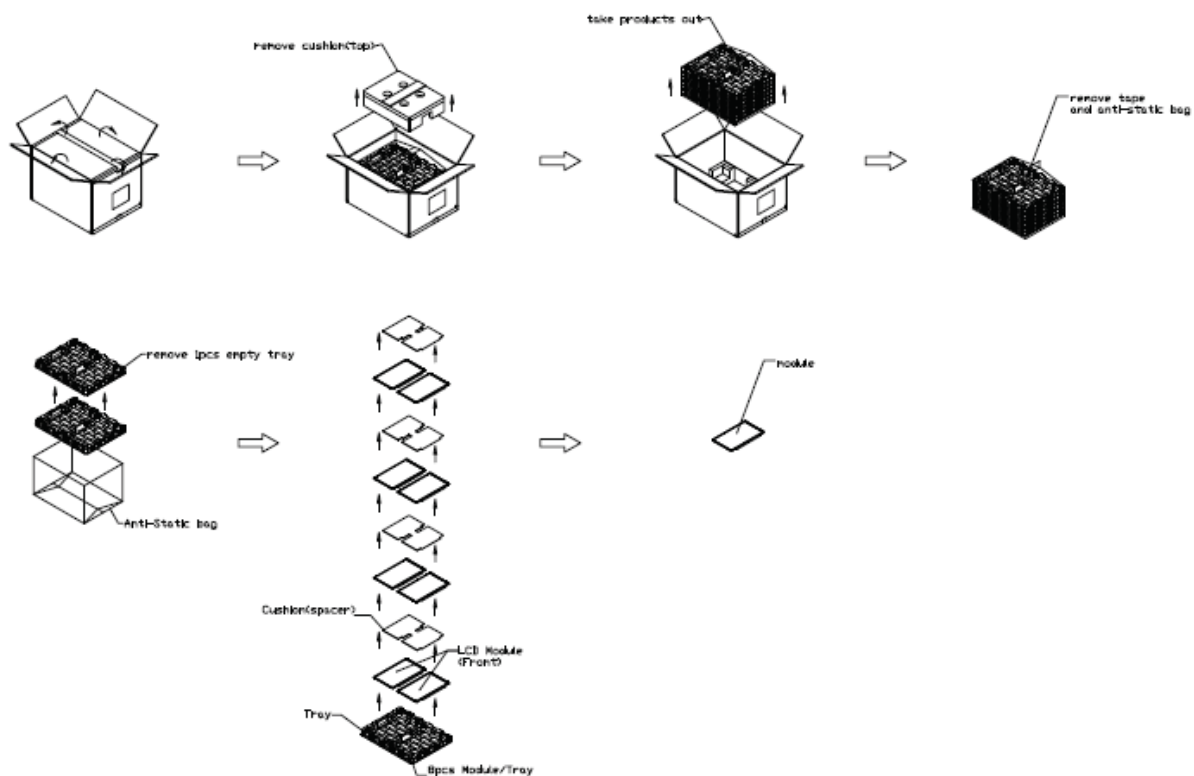


Figure. 7-3 Packing method



8. PRECAUTIONS

8.1 HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the LED wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.

8.2 STORAGE PRECAUTIONS

- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of LED will be higher than the room temperature.

8.3 OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMIS LSI chips from damage during latch-up.
- (3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while assembling with converter. Do not disassemble the module or insert anything into the Backlight unit.



Appendix. EDID DATA STRUCTURE

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the VESA Plug & Display and FPD/ standards.

Byte # (decimal)	Byte # (hex)	Field Name and Comments	Value (hex)	Value (binary)
0	0	Header	00	00000000
1	1	Header	FF	11111111
2	2	Header	FF	11111111
3	3	Header	FF	11111111
4	4	Header	FF	11111111
5	5	Header	FF	11111111
6	6	Header	FF	11111111
7	7	Header	00	00000000
8	8	EISA ID manufacturer name ("CMN")	0D	00001101
9	9	EISA ID manufacturer name	AE	10101110
10	0A	ID product code (LSB)	32	00110010
11	0B	ID product code (MSB)	11	00010001
12	0C	ID S/N (fixed "0")	00	00000000
13	0D	ID S/N (fixed "0")	00	00000000
14	0E	ID S/N (fixed "0")	00	00000000
15	0F	ID S/N (fixed "0")	00	00000000
16	10	Week of manufacture (fixed week code)	13	00010011
17	11	Year of manufacture (fixed year code)	17	00010111
18	12	EDID structure version ("1")	01	00000001
19	13	EDID revision ("4")	04	00000100
20	14	Video I/P definition ("Digital")	95	10010101
21	15	Active area horizontal ("25.6125cm")	1A	00011010
22	16	Active area vertical ("14.4cm")	0E	00001110
23	17	Display Gamma (Gamma = "2.2")	78	01111000
24	18	Feature support ("RGB, Non-continous")	02	00000010
25	19	Rx1, Rx0, Ry1, Ry0, Gx1, Gx0, Gy1, Gy0	14	00010100
26	1A	Bx1, Bx0, By1, By0, Wx1, Wx0, Wy1, Wy0	35	00110101
27	1B	Rx=0.57	92	10010010
28	1C	Ry=0.333	55	01010101
29	1D	Gx=0.325	53	01010011
30	1E	Gy=0.582	95	10010101
31	1F	Bx=0.16	29	00101001
32	20	By=0.144	24	00100100
33	21	Wx=0.313	50	01010000
34	22	Wy=0.329	54	01010100
35	23	Established timings 1	00	00000000
36	24	Established timings 2	00	00000000
37	25	Manufacturer's reserved timings	00	00000000
38	26	Standard timing ID # 1	01	00000001
39	27	Standard timing ID # 1	01	00000001
40	28	Standard timing ID # 2	01	00000001
41	29	Standard timing ID # 2	01	00000001



PRODUCT SPECIFICATION

42	2A	Standard timing ID # 3	01	00000001
43	2B	Standard timing ID # 3	01	00000001
44	2C	Standard timing ID # 4	01	00000001
45	2D	Standard timing ID # 4	01	00000001
46	2E	Standard timing ID # 5	01	00000001
47	2F	Standard timing ID # 5	01	00000001
48	30	Standard timing ID # 6	01	00000001
49	31	Standard timing ID # 6	01	00000001
50	32	Standard timing ID # 7	01	00000001
51	33	Standard timing ID # 7	01	00000001
52	34	Standard timing ID # 8	01	00000001
53	35	Standard timing ID # 8	01	00000001
54	36	Detailed timing description # 1 Pixel clock ("76.42MHz")	DA	11011010
55	37	# 1 Pixel clock (hex LSB first)	1D	00011101
56	38	# 1 H active ("1366")	56	01010110
57	39	# 1 H blank ("226")	E2	11100010
58	3A	# 1 H active : H blank	50	01010000
59	3B	# 1 V active ("768")	00	00000000
60	3C	# 1 V blank ("32")	20	00100000
61	3D	# 1 V active : V blank	30	00110000
62	3E	# 1 H sync offset ("136")	88	10001000
63	3F	# 1 H sync pulse width ("30")	1E	00011110
64	40	# 1 V sync offset : V sync pulse width ("8 : 12")	8C	10001100
65	41	# 1 H sync offset : H sync pulse width : V sync offset : V sync width	00	00000000
66	42	# 1 H image size ("256 mm")	00	00000000
67	43	# 1 V image size ("144 mm")	90	10010000
68	44	# 1 H image size : V image size	10	00010000
69	45	# 1 H boarder ("0")	00	00000000
70	46	# 1 V boarder ("0")	00	00000000
71	47	# 1 Non-interlaced, Normal, no stereo, Separate sync, H/V pol Negatives	18	00011000
72	48	Detailed timing description # 2	00	00000000
73	49	# 2 Flag	00	00000000
74	4A	# 2 Reserved	00	00000000
75	4B	# 2 ASCII string Model name	FE	11111110
76	4C	# 2 Flag	00	00000000
77	4D	# 2 Character of Model name ("N")	4E	01001110
78	4E	# 2 Character of Model name ("1")	31	00110001
79	4F	# 2 Character of Model name ("1")	31	00110001
80	50	# 2 Character of Model name ("6")	36	00110110
81	51	# 2 Character of Model name ("B")	42	01000010
82	52	# 2 Character of Model name ("G")	47	01000111
83	53	# 2 Character of Model name ("E")	45	01000101
84	54	# 2 Character of Model name ("-")	2D	00101101
85	55	# 2 Character of Model name ("E")	45	01000101
86	56	# 2 Character of Model name ("A")	41	01000001
87	57	# 2 Character of Model name ("2")	32	00110010





PRODUCT SPECIFICATION

88	58	# 2 New line character indicates end of ASCII string	0A	00001010
89	59	# 2 Padding with "Blank" character	20	00100000
90	5A	Detailed timing description # 3	00	00000000
91	5B	# 3 Flag	00	00000000
92	5C	# 3 Reserved	00	00000000
93	5D	# 3 ASCII string Vendor	FE	11111110
94	5E	# 3 Flag	00	00000000
95	5F	# 3 Character of string ("C")	43	01000011
96	60	# 3 Character of string ("M")	4D	01001101
97	61	# 3 Character of string ("N")	4E	01001110
98	62	# 3 New line character indicates end of ASCII string	0A	00001010
99	63	# 3 Padding with "Blank" character	20	00100000
100	64	# 3 Padding with "Blank" character	20	00100000
101	65	# 3 Padding with "Blank" character	20	00100000
102	66	# 3 Padding with "Blank" character	20	00100000
103	67	# 3 Padding with "Blank" character	20	00100000
104	68	# 3 Padding with "Blank" character	20	00100000
105	69	# 3 Padding with "Blank" character	20	00100000
106	6A	# 3 Padding with "Blank" character	20	00100000
107	6B	# 3 Padding with "Blank" character	20	00100000
108	6C	Detailed timing description # 4	00	00000000
109	6D	# 4 Flag	00	00000000
110	6E	# 4 Reserved	00	00000000
111	6F	# 4 ASCII string Model Name	FE	11111110
112	70	# 4 Flag	00	00000000
113	71	# 4 Character of Model name ("N")	4E	01001110
114	72	# 4 Character of Model name ("1")	31	00110001
115	73	# 4 Character of Model name ("1")	31	00110001
116	74	# 4 Character of Model name ("6")	36	00110110
117	75	# 4 Character of Model name ("B")	42	01000010
118	76	# 4 Character of Model name ("G")	47	01000111
119	77	# 4 Character of Model name ("E")	45	01000101
120	78	# 4 Character of Model name ("-")	2D	00101101
121	79	# 4 Character of Model name ("E")	45	01000101
122	7A	# 4 Character of Model name ("A")	41	01000001
123	7B	# 4 Character of Model name ("2")	32	00110010
124	7C	# 4 New line character indicates end of ASCII string	0A	00001010
125	7D	# 4 Padding with "Blank" character	20	00100000
126	7E	Extension flag	00	00000000
127	7F	Checksum	48	01001000

PRODUCT SPECIFICATION

Appendix. OUTLINE DRAWING


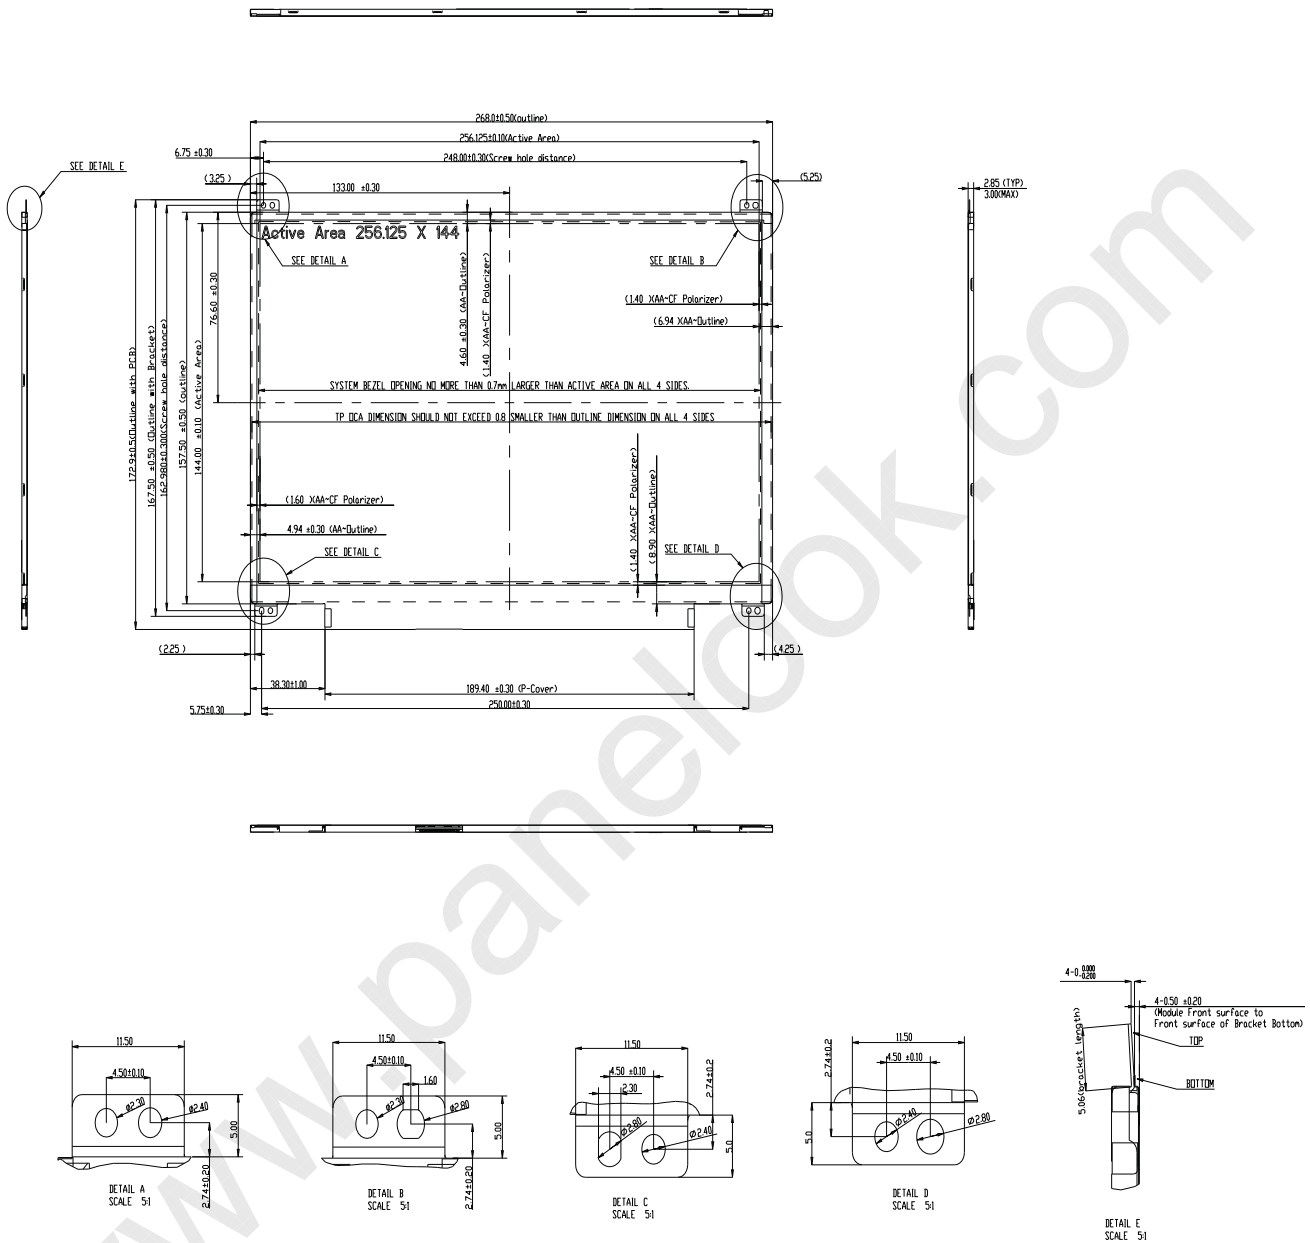


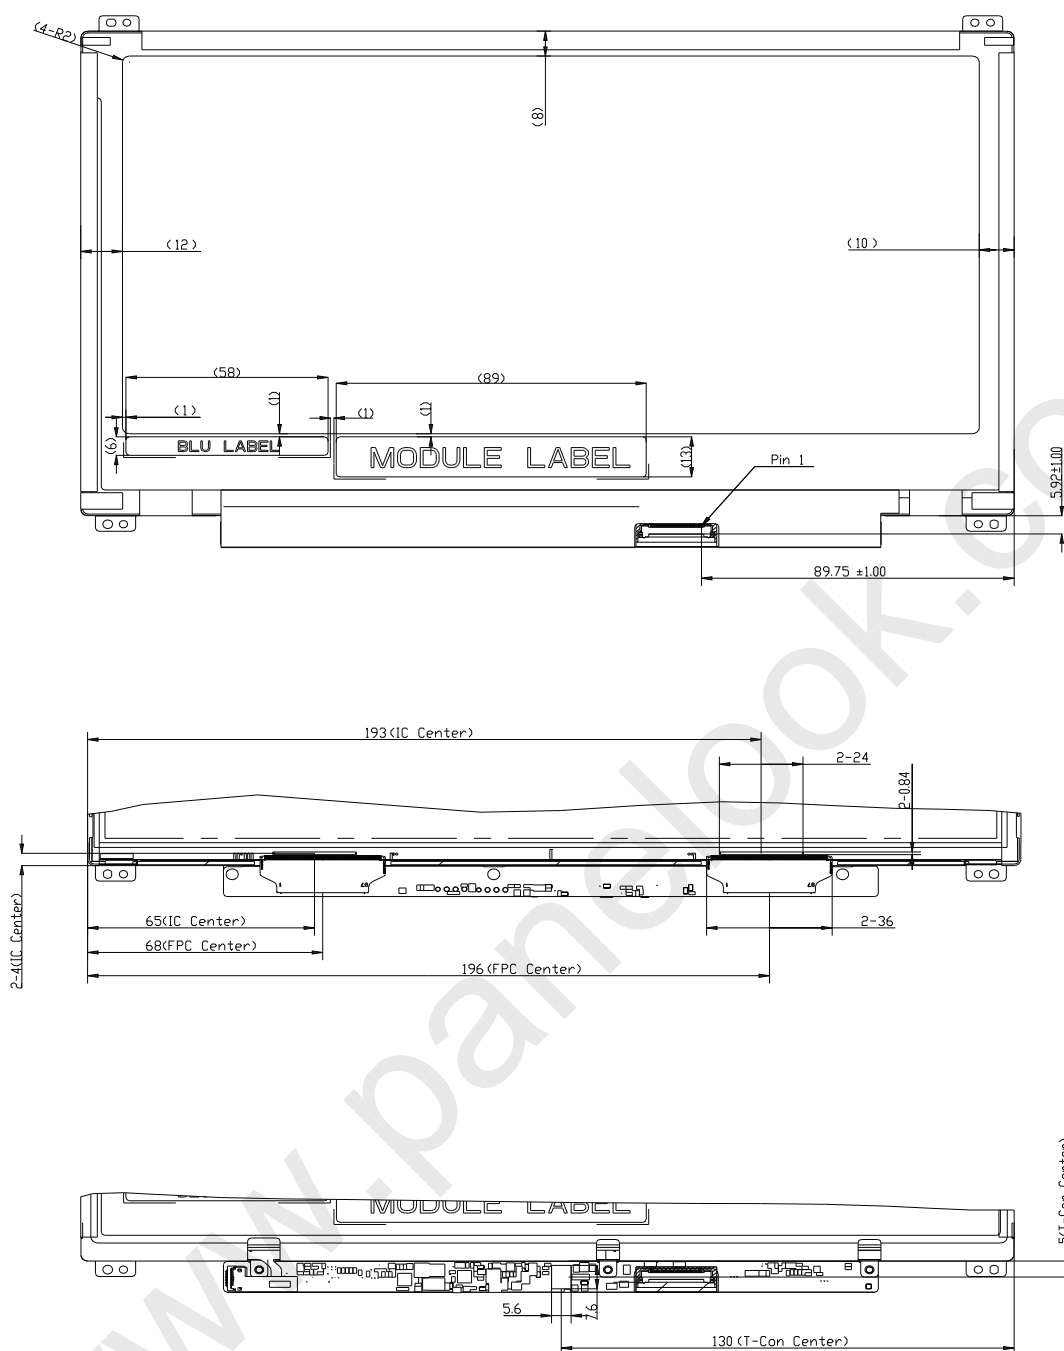




NOTES :


1. LCD MODULE INPUT CONNECTOR : I-PEX 20455-030E-12
2. IN ORDER TO AVOID ABNORMAL DISPLAY, POOLING AND WHITE SPOT, NO OVERLAPPING IS SUGGESTED AT CABLES, ANTENNAS, CAMERA, WLAN, WAN OR FOREIGN OBJECTS OVER FPC, T-CON AND VR LOCATIONS.
3. eDP CONNECTOR IS MEASURED AT PIN1 AND ITS MATING LINE.
4. MODULE FLATNESS SPEC 0.5mm MAX.
5. ' () ' MARKS THE REFERENCE DIMENSIONS.

Appendix. SYSTEM COVER DESIGN GUIDANCE



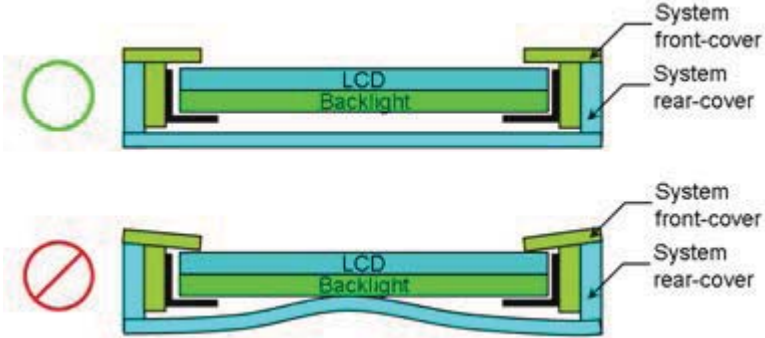
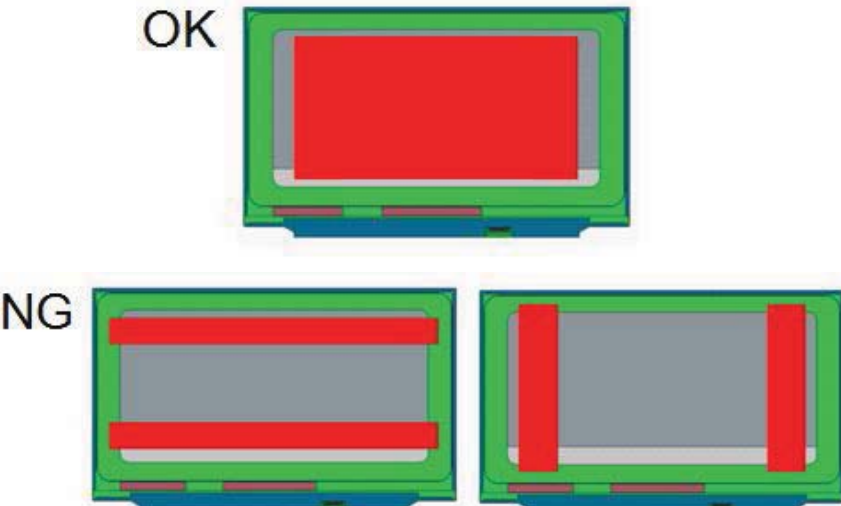
0.	Permanent deformation of system cover after reliability test
	
Definition	System cover including front and rear cover may deform during reliability test. Permanent deformation of system front and rear cover after reliability test should not interfere with panel. Because it may cause issues such as pooling, abnormal display, white spot, and also cell crack. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.
1	Sponge area design behind panel
	
Definition	Sponge area design behind panel can not be across the panel metal rear and the reflector at the same time. It can be on the reflector area only.
2	Gap between system rear-cover & panel
	
Definition	The maximum thickness of sponge on the system rear-cover can not interfere to the maximum thickness of panel. Because the interference may cause stress concentration. Issues such as pooling, abnormal display, white spot, and cell crack may occur. Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.



3	Gap Design between panel & around structure												
<table><tr><th>Item</th><th>Suggestion</th><th>Remark</th></tr><tr><td>A1</td><td>$A1 \geq 0.5$</td><td rowspan="4">Gap $\geq$ Panel outline max. tolerance + Assembly max. tolerance</td></tr><tr><td>A2</td><td>$A2 \geq 0.5$</td></tr><tr><td>B1</td><td>$B1 \geq 0.5$</td></tr><tr><td>B2</td><td>$B2 \geq 0.8$</td></tr></table>	Item	Suggestion	Remark	A1	$A1 \geq 0.5$	Gap $\geq$ Panel outline max. tolerance + Assembly max. tolerance	A2	$A2 \geq 0.5$	B1	$B1 \geq 0.5$	B2	$B2 \geq 0.8$	
Item	Suggestion	Remark											
A1	$A1 \geq 0.5$	Gap $\geq$ Panel outline max. tolerance + Assembly max. tolerance											
A2	$A2 \geq 0.5$												
B1	$B1 \geq 0.5$												
B2	$B2 \geq 0.8$												
Definition	Gap Design between panel & around structure needs to consider the maximum tolerances of panel outline and assembly at the same time. Gap Design suggestion is shown as A1/A2/B1/B2 on the chart.												
4	Gap between panel & bezel												
Definition	The gap between system bezel & panel surface is needed to prevent pooling or glass broken. Zero gap or interference such as burr and warpage from mold frame may cause pooling issue near system front-cover opening edge. This phenomenon is obvious during swing test, hinge test, knock test, or during pooling inspection procedure. To remain the sufficient gap, design with system rib higher than maximum panel thickness is recommended. The sufficient gap design is greater or equal to 0.1mm.												
5	Cable routing behind panel												


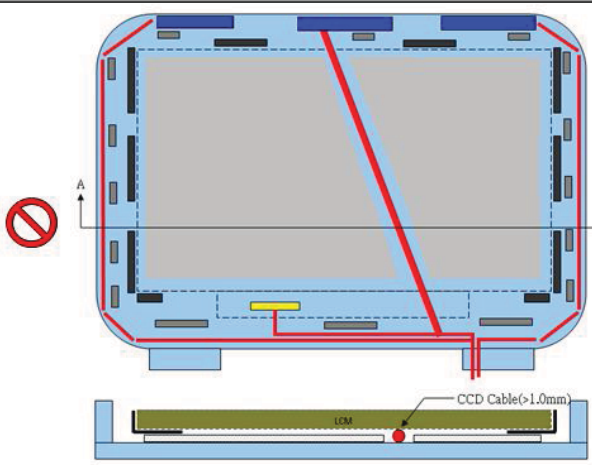
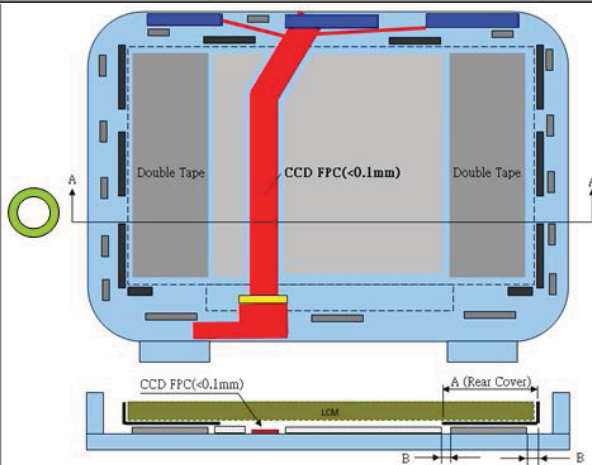
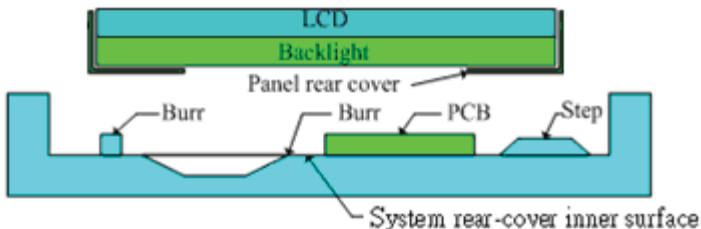
Definition	It is strongly recommended that cables route around the panel outline, not overlap with the panel outline (including PCB). Because issue such as abnormal display & white spot after backpack test, hinge test, twist test or pogo test may occur. If any routings across panel outline are needed, we suggest design as below: -Using FFC/FPC to replace cables. -Routing at the right or left area of panel metal rear. -Avoid any routings at the step of panel or A cover. -No interference to panel. -It should not overlap TCON, COF/FPC, Driver IC																		
6	Interference examination of antenna cable and Web Cam wire - To prevent panel damage, we suggest using CCD FPC to replace CCD cable - Using double tape to fix LCM module for no bracket design.																		
  <table border="0"> <tr> <td> Rear-cover</td> <td> Connector</td> </tr> <tr> <td> Sponge</td> <td> Camera/Antenna</td> </tr> <tr> <td> Double Tape</td> <td> Stopper</td> </tr> <tr> <td> CCD Cable/FPC</td> <td> LCM Module</td> </tr> <tr> <td> Hook</td> <td> Panel outline</td> </tr> </table> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">Rear Cover Width(A)</td> <td style="padding: 2px;">A = 30mm</td> </tr> <tr> <td style="padding: 2px;">Cover edge to Double Tape(B)</td> <td style="padding: 2px;">B = 3.0mm</td> </tr> <tr> <td style="padding: 2px;">CCD FPC thickness</td> <td style="padding: 2px;"><0.1mm</td> </tr> <tr> <td style="padding: 2px;">Sponge thickness</td> <td style="padding: 2px;">0.5mm 0.2~0.3mm(compressed)</td> </tr> </table>		Rear-cover	Connector	Sponge	Camera/Antenna	Double Tape	Stopper	CCD Cable/FPC	LCM Module	Hook	Panel outline	Rear Cover Width(A)	A = 30mm	Cover edge to Double Tape(B)	B = 3.0mm	CCD FPC thickness	<0.1mm	Sponge thickness	0.5mm 0.2~0.3mm(compressed)
Rear-cover	Connector																		
Sponge	Camera/Antenna																		
Double Tape	Stopper																		
CCD Cable/FPC	LCM Module																		
Hook	Panel outline																		
Rear Cover Width(A)	A = 30mm																		
Cover edge to Double Tape(B)	B = 3.0mm																		
CCD FPC thickness	<0.1mm																		
Sponge thickness	0.5mm 0.2~0.3mm(compressed)																		
	If the antenna cable or Web Cam wire must overlap with the panel outline, both sides of the antenna cable or Web Cam wire must have a sponge(Sponge material can not contain NH3) and sponge require higher antenna cable or Web Cam wire.(Antenna cable or Web Cam wire should not overlap with TCON,COF/FPC,Driver IC) Note: If the interference can not be avoided, please feel free to contact INX FAE Engineer for collaboration design. We can help to verify and pass risk assessment for customer reference.																		
7	System rear-cover inner surface examination																		
																			
Definition	Burr at logo edge, steps, protrusions or PCB board may cause stress concentration. White spot or glass broken issue may occur during reliability test.																		
8	Tape/sponge design on system inner surface																		

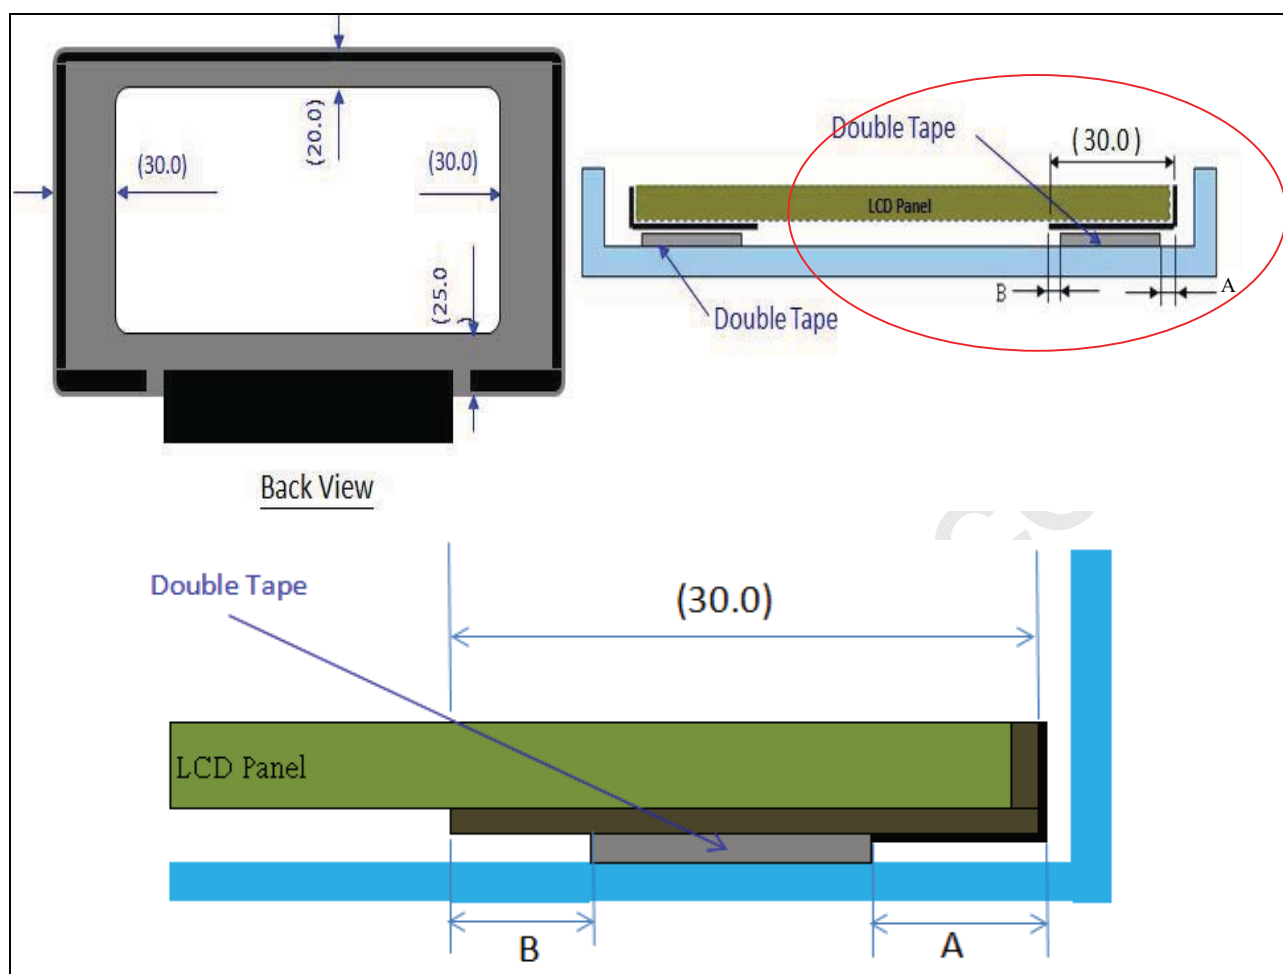


Definition	To prevent peeling the bezel tape in rework process. The length of double tape is $30 - (A+B)$, A is bezel tape length and B is the double tape attaching tolerance. Ex :A :2mm, B:2mm, the length of double tape is $30-(2+2)=26\text{mm}$.
9	Material used for system rear-cover
	 System rear-cover material: Al-Mg alloy System rear-cover thickness: 1.5mm MIN
Definition	System rear-cover material with high rigidity is needed to resist deformation during scuffing test, hinge test, pogo test, or backpack test. Abnormal display, white spot, pooling issue may occur if low rigidity material is used. Solid structure design of system rear-cover may also influence the rigidity of system rear-cover. The deformation of system rear-cover should not caused interference.
10	C cover shape design

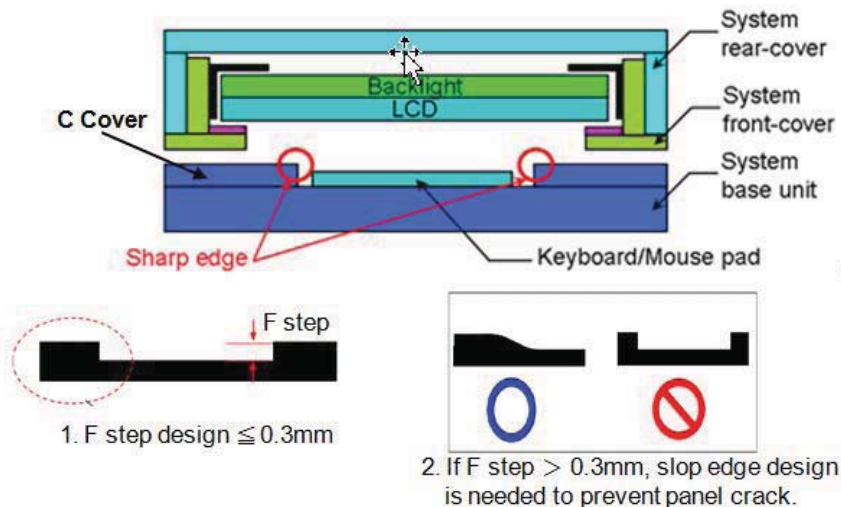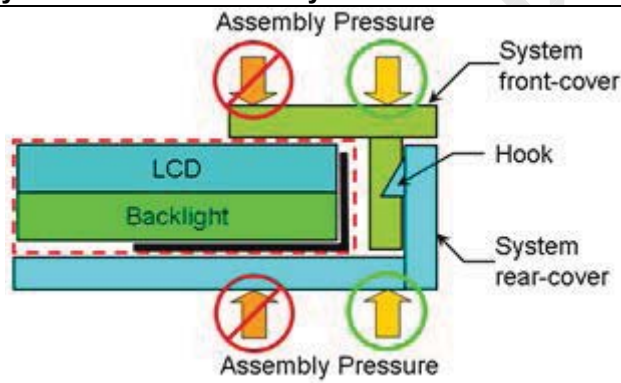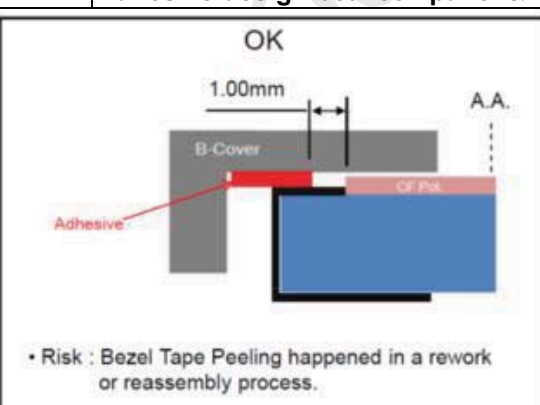
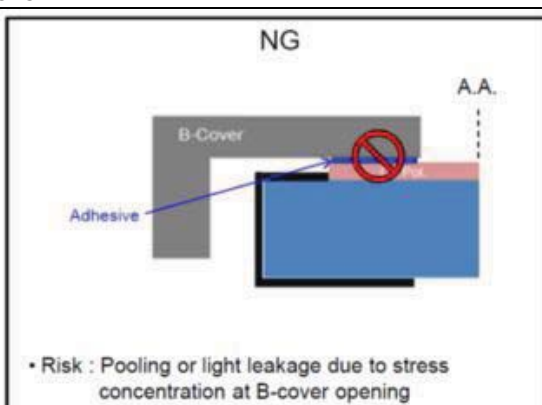
 1. F step design $\leq 0.3\text{mm}$ 2. If F step $> 0.3\text{mm}$, slop edge design is needed to prevent panel crack.	
Definition	The F step design on C Cover less than or equal to 0.3mm is recommended. If F step exceeds 0.3mm, the slop edge design is necessary to prevent panel crack.
11	Assembly SOP examination for system front-cover with Hook design
	
Definition	To prevent panel crack during system front-cover assembly process with hook design, it is not recommended to press panel or any location that related directly to the panel.
12	Adhesive design between panel & bezel
OK  • Risk : Bezel Tape Peeling happened in a rework or reassembly process. NG  • Risk : Pooling or light leakage due to stress concentration at B-cover opening	
Definition	To prevent panel crack during system front-cover assembly process with double tape design, When system applied adhesive between B-Cover and LCD module, please design a distance 1.00mm between B-Cover's adhesive and CF pol. Do NOT put adhesive on CF pol. Adhesive material need be qualified to prevent from doing damage to cell tape after rework. Adhesive material need be qualified to prevent abnormal noise when hinge swinging test.

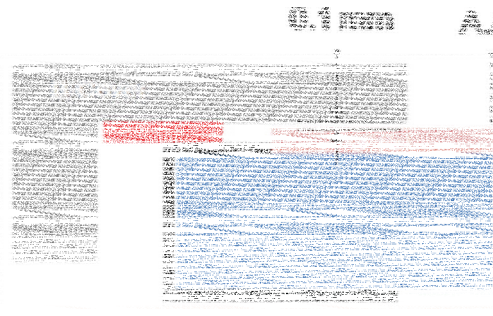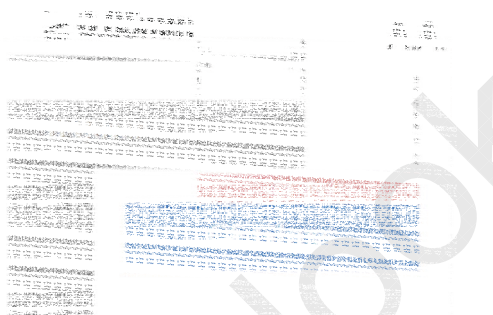13	System front-cover assembly reference with Double tape design
	
Definition	To prevent system front-cover peeling at double tape contact area, A gap between B-Cover & CF-Pol. Is 0.1mm min.
14	System front-cover opening area reference with TFT-LCD module
	
Definition	To prevent panel the noise of B-cover & CF Pol. Distance from CF Pol. edge to front-cover edge more than 0.65mm.

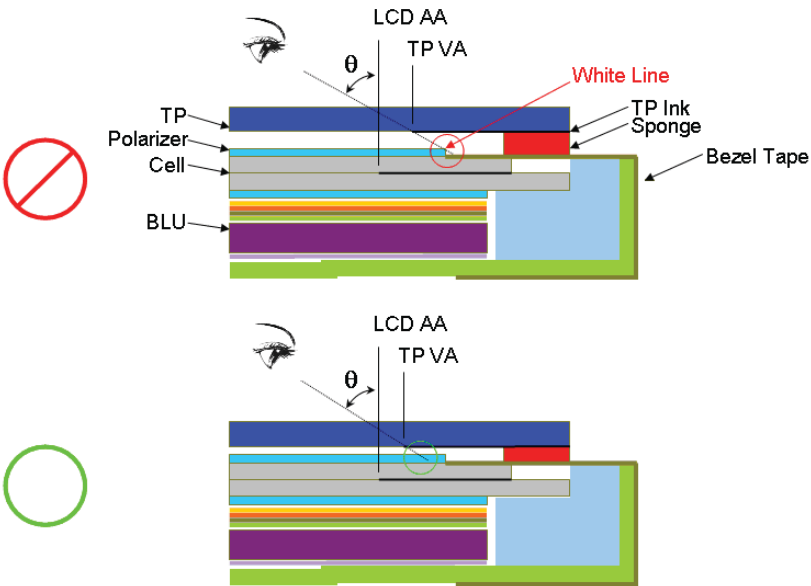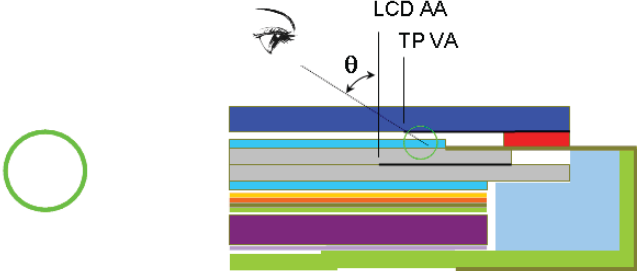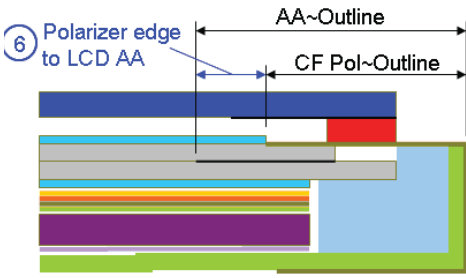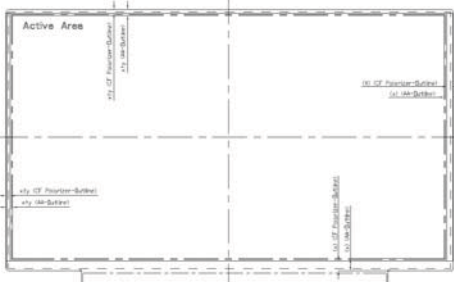15	Touch Application : TP and LCD Module Combination for White Line Prevention														
  <table border="1" style="margin: 10px auto; width: 80%;"> <thead> <tr> <th colspan="2">Parameter consideration for White Line Issue :</th> </tr> </thead> <tbody> <tr><td>1</td><td>TP VA to LCD AA distance</td></tr> <tr><td>2</td><td>TP Assembly tolerance</td></tr> <tr><td>3</td><td>TP Ink Printing tolerance</td></tr> <tr><td>4</td><td>Sponge thickness and tolerance</td></tr> <tr><td>5</td><td>Inspection/Viewing Angle specification</td></tr> <tr><td>6</td><td>Polarizer edge to LCD AA distance and tolerance</td></tr> </tbody> </table> Polarizer edge to LCD AA distance can be derived by “AA~Outline” – “CF Pol~Outline” with respect to INX 2D Outline Drawing on each side.  		Parameter consideration for White Line Issue :		1	TP VA to LCD AA distance	2	TP Assembly tolerance	3	TP Ink Printing tolerance	4	Sponge thickness and tolerance	5	Inspection/Viewing Angle specification	6	Polarizer edge to LCD AA distance and tolerance
Parameter consideration for White Line Issue :															
1	TP VA to LCD AA distance														
2	TP Assembly tolerance														
3	TP Ink Printing tolerance														
4	Sponge thickness and tolerance														
5	Inspection/Viewing Angle specification														
6	Polarizer edge to LCD AA distance and tolerance														
Definition	For using in Touch Application: to prevent White Line appears between TP and LCD module combination, the maximum inspection angle location must not fall onto LCD polarizer edge, otherwise light line near edge of polarizer will be appear. Parameters such as TP VA to LCD AA distance, TP assembly tolerance, TP Ink printing tolerance, Sponge thickness and tolerance, and Maximum Inspection/Viewing Angle, must be considered with respect to LCD module's Polarizer edge location and tolerance. This consideration must be taken at all four edges separately. The goal is to find parameters combination that allow maximum inspection angle falls inside polarizer black margin area. Note: Information for Polarizer edge location and its tolerance can be derived from INX 2D Outline Drawing (“AA ~Outline” - “CF Pol~Outline”). Note: Please feel free to contact INX FAE Engineer. By providing value of parameters above on each side, we can help to verify and pass the white line risk assessment for customer reference.														
16	Color of system front-cover material														

PRODUCT SPECIFICATION

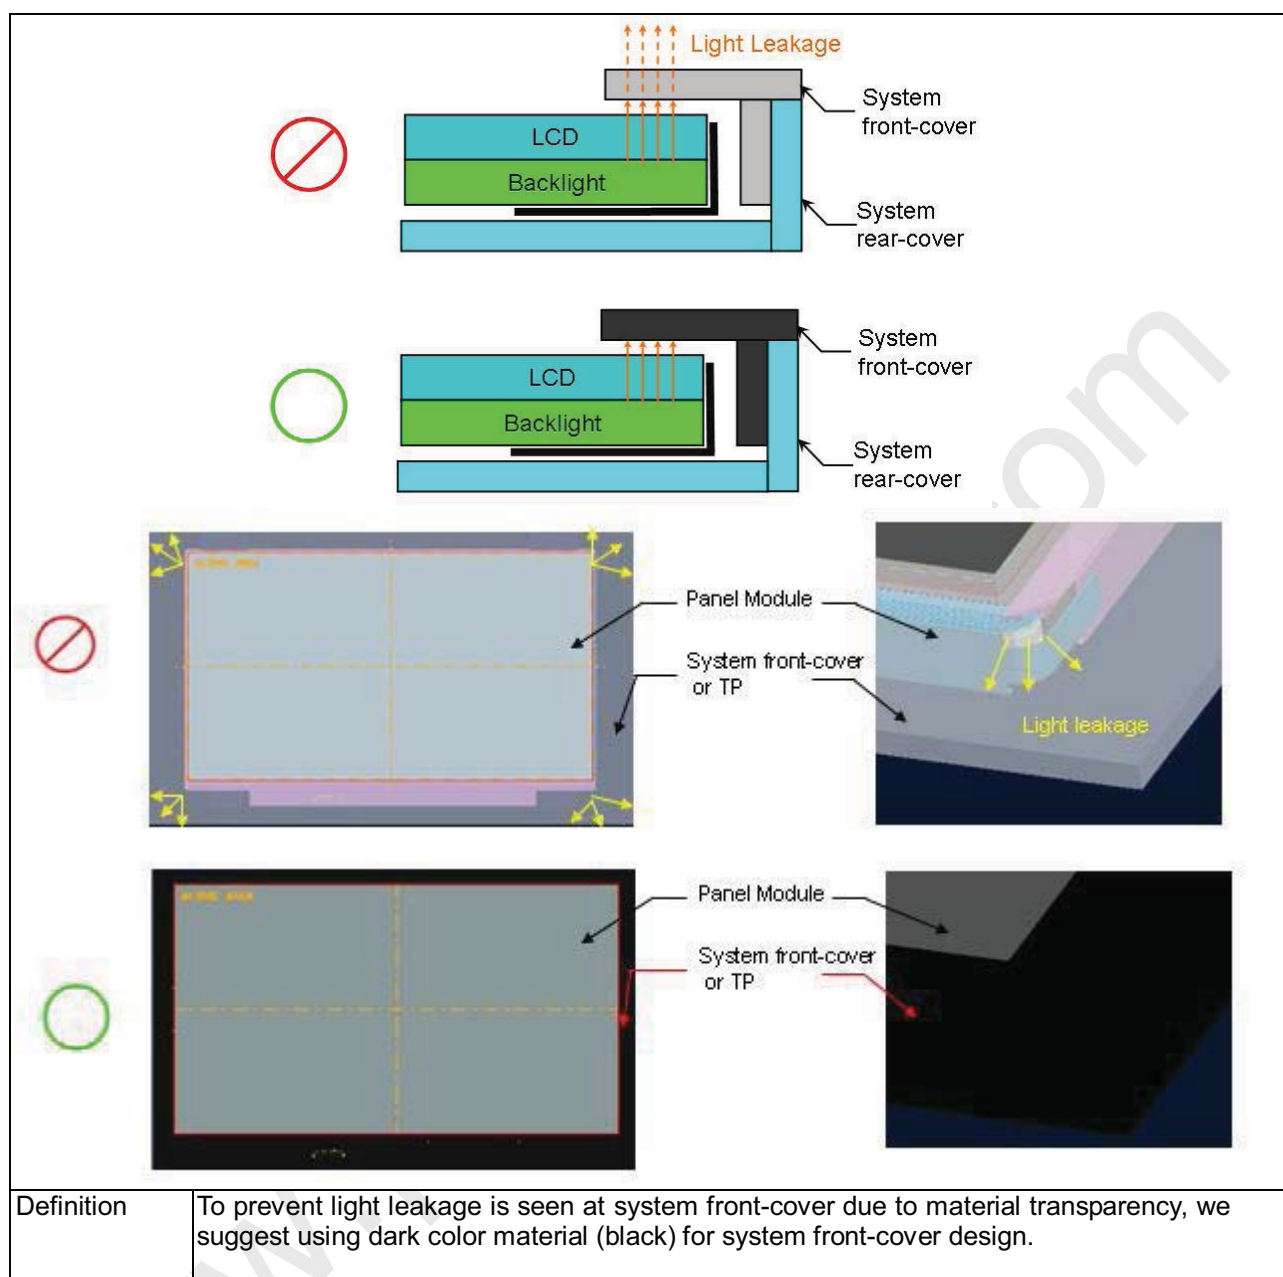

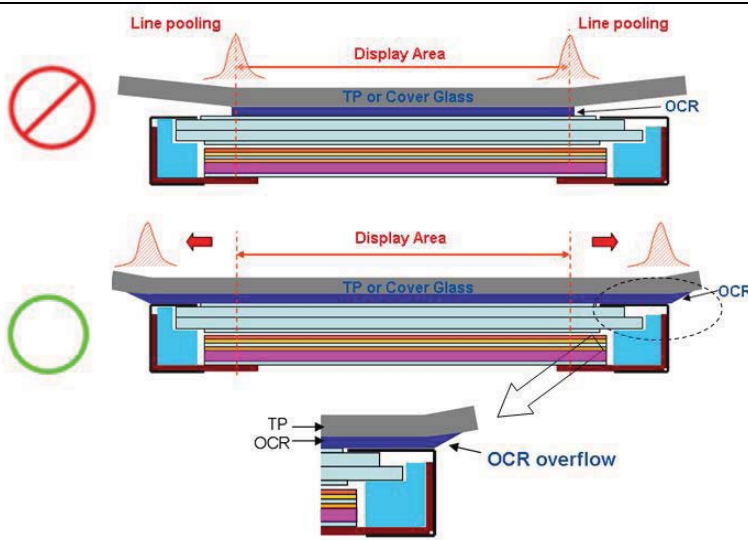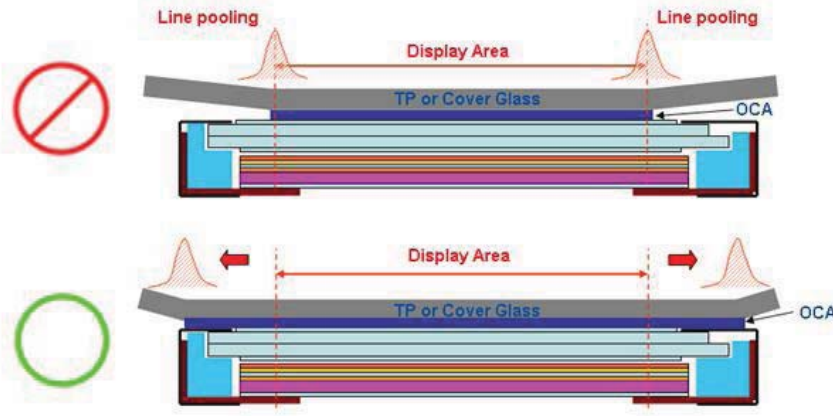17	Use OCR Lamination
	
Definition	OCR glue as possible beyond module, in order to avoid Line Pooling
18	Use OCA Lamination
	
Definition	OCA glue as possible plastered throughout the module, in order to avoid Line Pooling.

Appendix. LCD MODULE HANDLING MANUAL

Purpose	• This SOP is prepared to prevent panel dysfunction possibility through incorrect handling procedure. • This manual provides guide in unpacking and handling steps. • Any person which may contact / related with panel, should follow guide stated in this manual to prevent panel loss.
1.	Unpacking
   ↓   	
2.	Panel Lifting

Remove PET Cover



Remove PE Foam

Handle with care
(see next page)

Finger Slot

Use slots at both sides for finger insertion.
Handle panel upward with care.

3.

Do and Don't

Do :

- Handle with both hands.
- Handle panel at left and right edge.



Don't :

- Lifting with one hand.



- Handle at PCBA side.



Don't :

- Stack panels.



- Press panel.



Don't :

- Put foreign stuff onto panel



- Put foreign stuff under panel



Don't :

- Paste any material unto white reflector sheet



Don't :

- Pull / Push white reflector sheet



Don't :

- Hold at panel corner.




Don't :

- Twist panel.



Do :

- Hold panel at top edge while inserting connector.

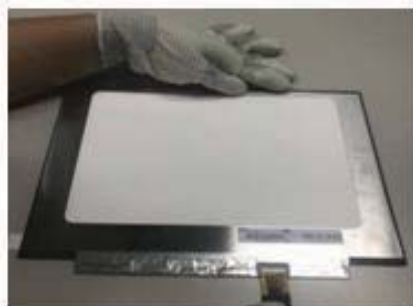

Don't :

- Press white reflector sheet while inserting connector.



Do :

- Remove panel protector film starts from pull tape

**Don't :**


- Remove panel protector film From film another side.

**Do :**

- Remove panel protector film starts from lower right corner to top left

**Don't :**

- Remove panel protector film parallel X-direction

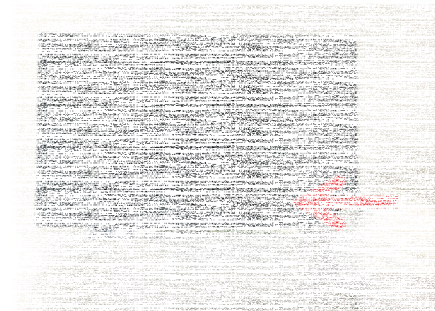

Don't :

- Touch or Press PCBA Area.





PRODUCT SPECIFICATION

www.panelook.com